



MICRO LOG

Company	FOUR WINDS OIL CORPORATION		
Well	GLENNEMEIER "A" #4		
Field	WEST UNION		
County	NORTON	State	KANSAS
Location:	API # : 15-137-20768-0000		
Permanent Datum	GROUND LEVEL	Elevation	2232
Log Measured From	KELLY BUSHING 8' A.G.L.	Other Services CDL/CNL DIL	
Drilling Measured From	KELLY BUSHING	Elevation K.B. 2240 D.F. 2238 G.L. 2232	
Date	10/1/23		
Run Number	TWO		
Depth Driller	3675		
Depth Logger	3676		
Bottom Logged Interval	3674		
Top Log Interval	3100		
Casing Driller	8 5/8"@222'		
Casing Logger	224		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 3,000 PPM	
Density / Viscosity	9.1/64		
pH / Fluid Loss	10.5/8.2		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.10@67F		
Rmf @ Meas. Temp	.825@67F		
Rmc @ Meas. Temp	1.32@67F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.652@113F		
Time Circulation Stopped	3.5 HOURS		
Time Logger on Bottom	7:00 A.M.		
Maximum Recorded Temperature	113F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	CAMERON BRIN		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-137-20768-0000

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
GLADE, KS., 19W. ON HWY 9 TO "RD. 12", 1 1/2S. TO "RD. Z", 1W., 3S., W. INTO





MAIN SECTION

Database File	8218ddn.db
Dataset Pathname	pass6.2
Presentation Format	micro
Dataset Creation	Sun Oct 01 07:36:37 2023
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3)	10		

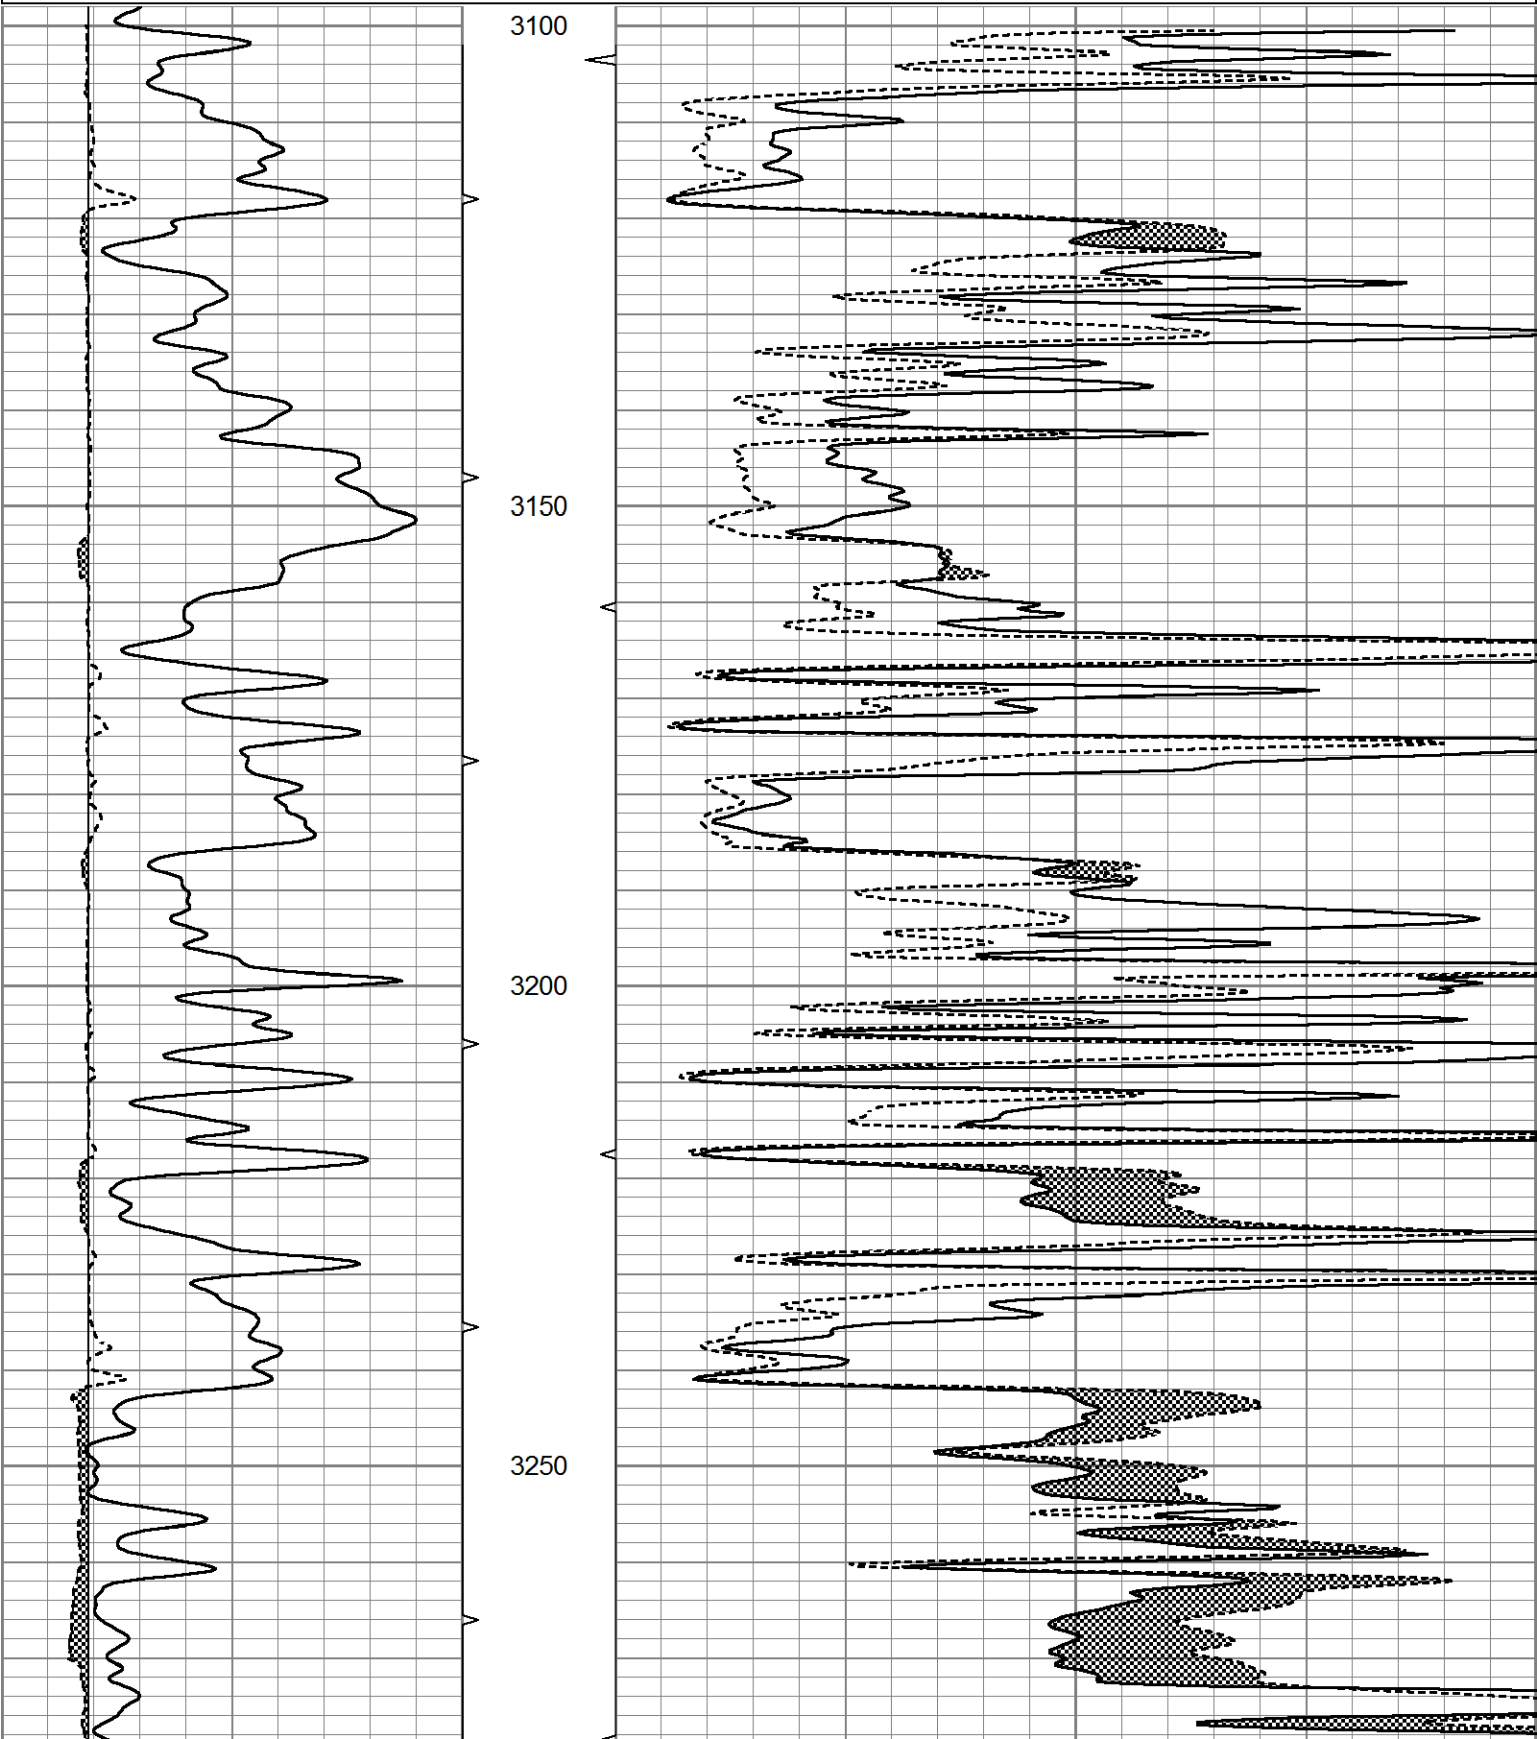

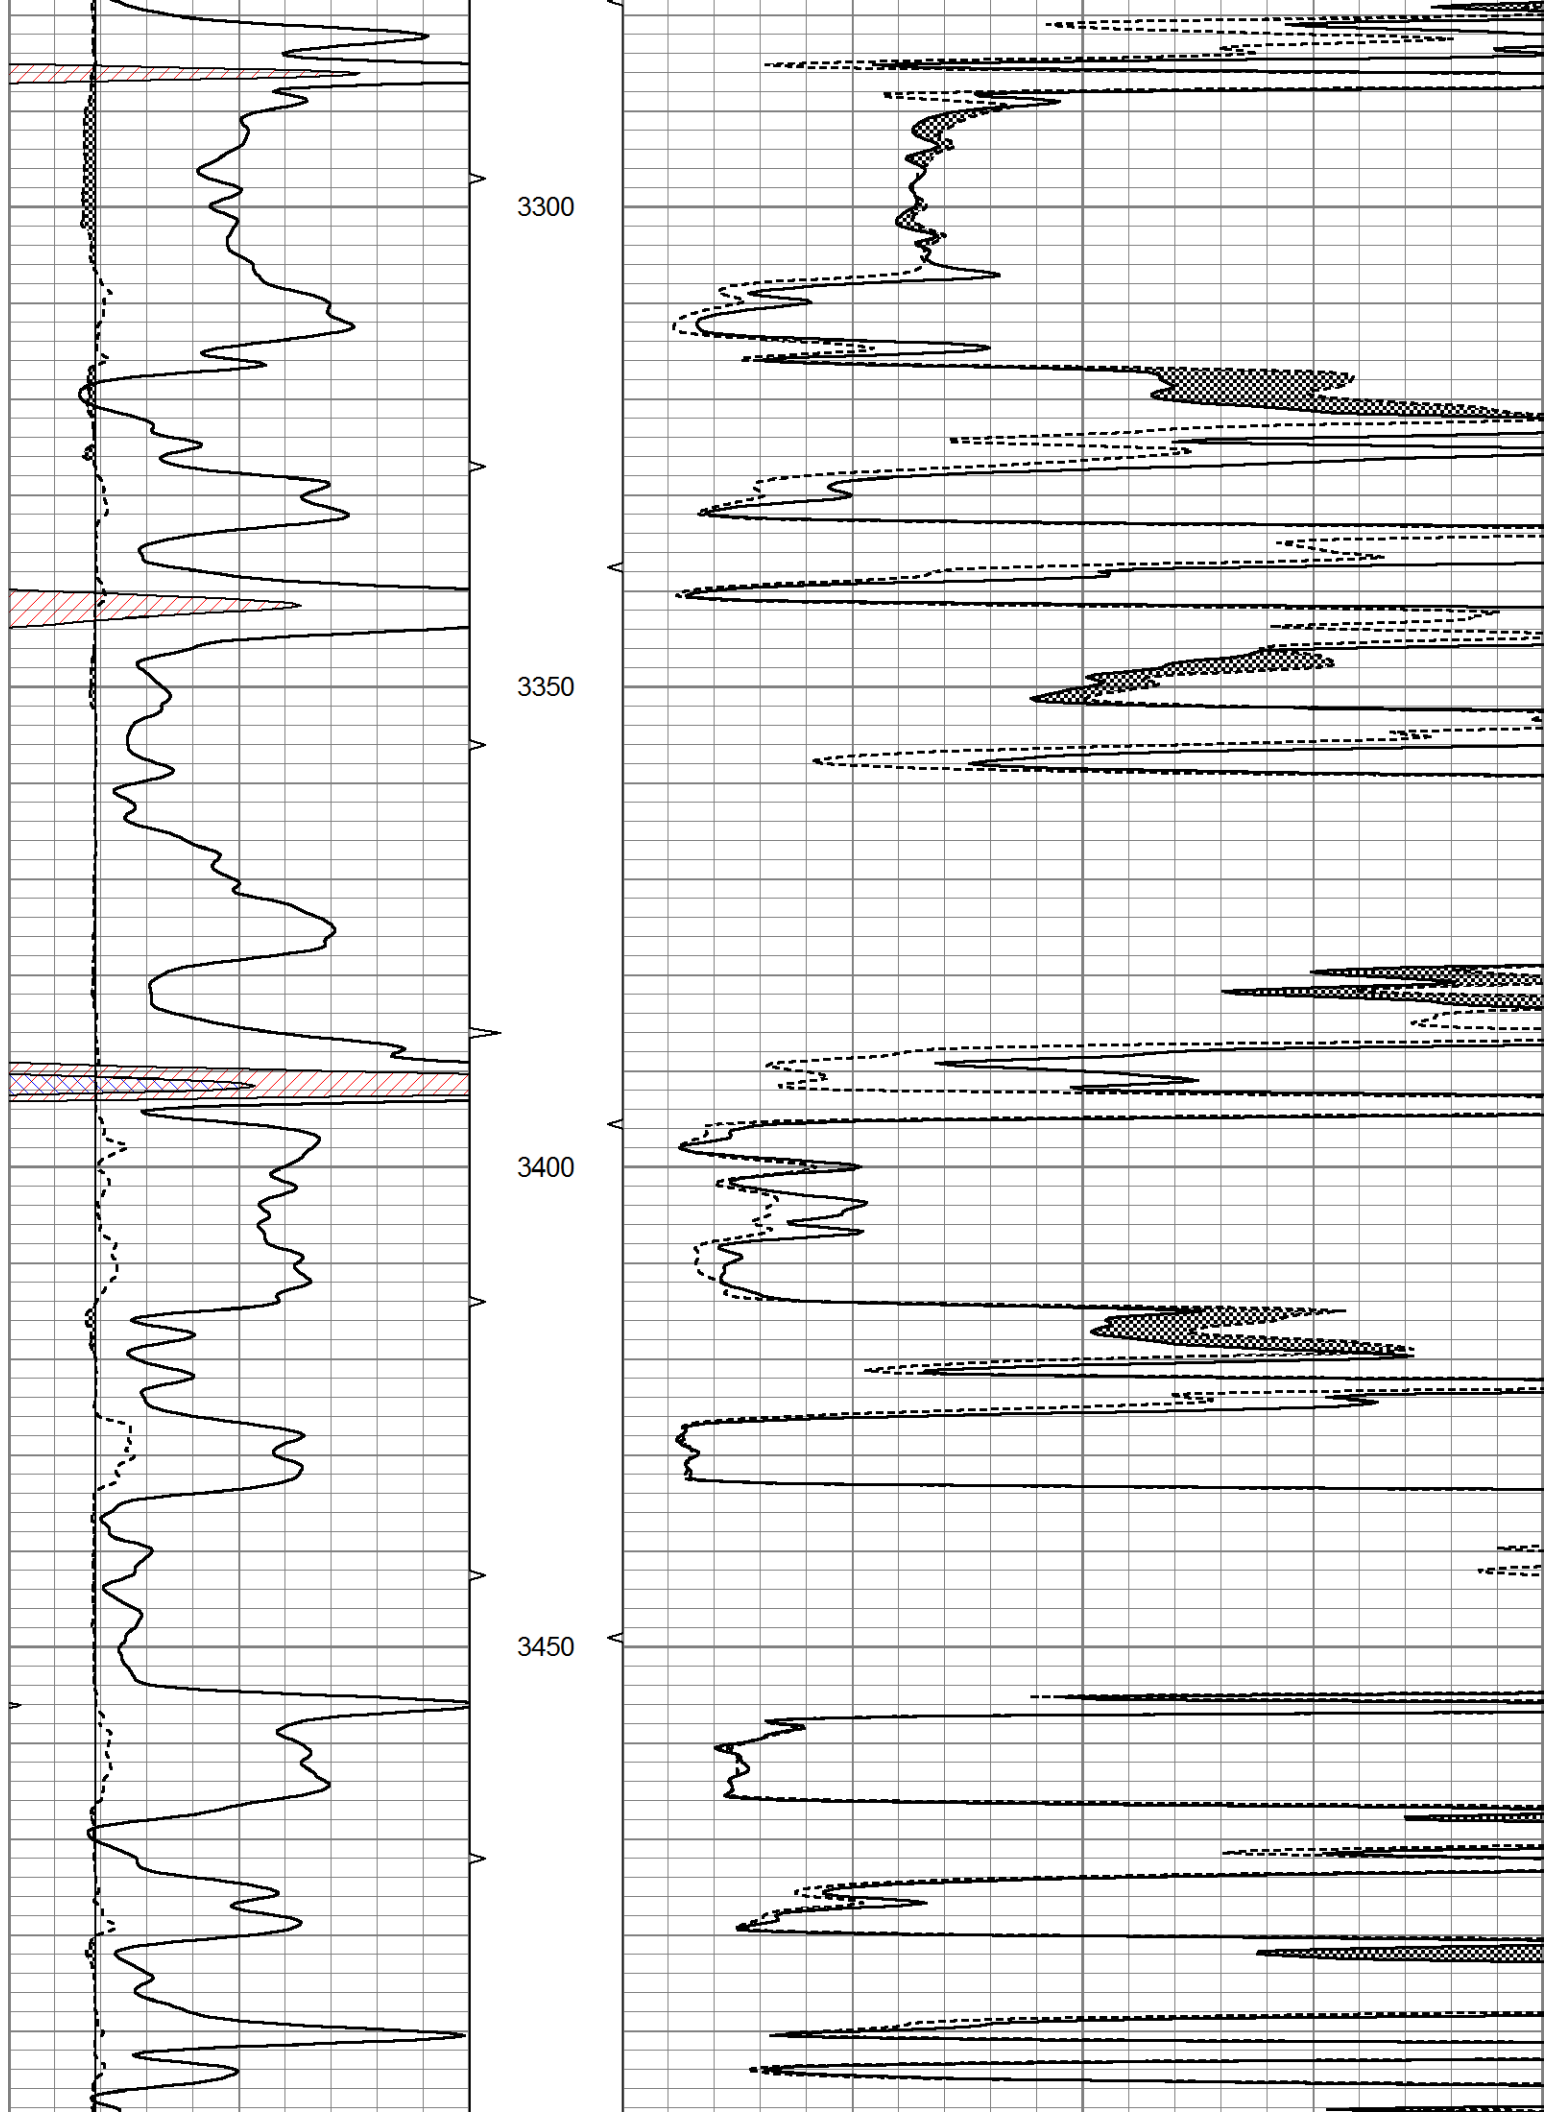

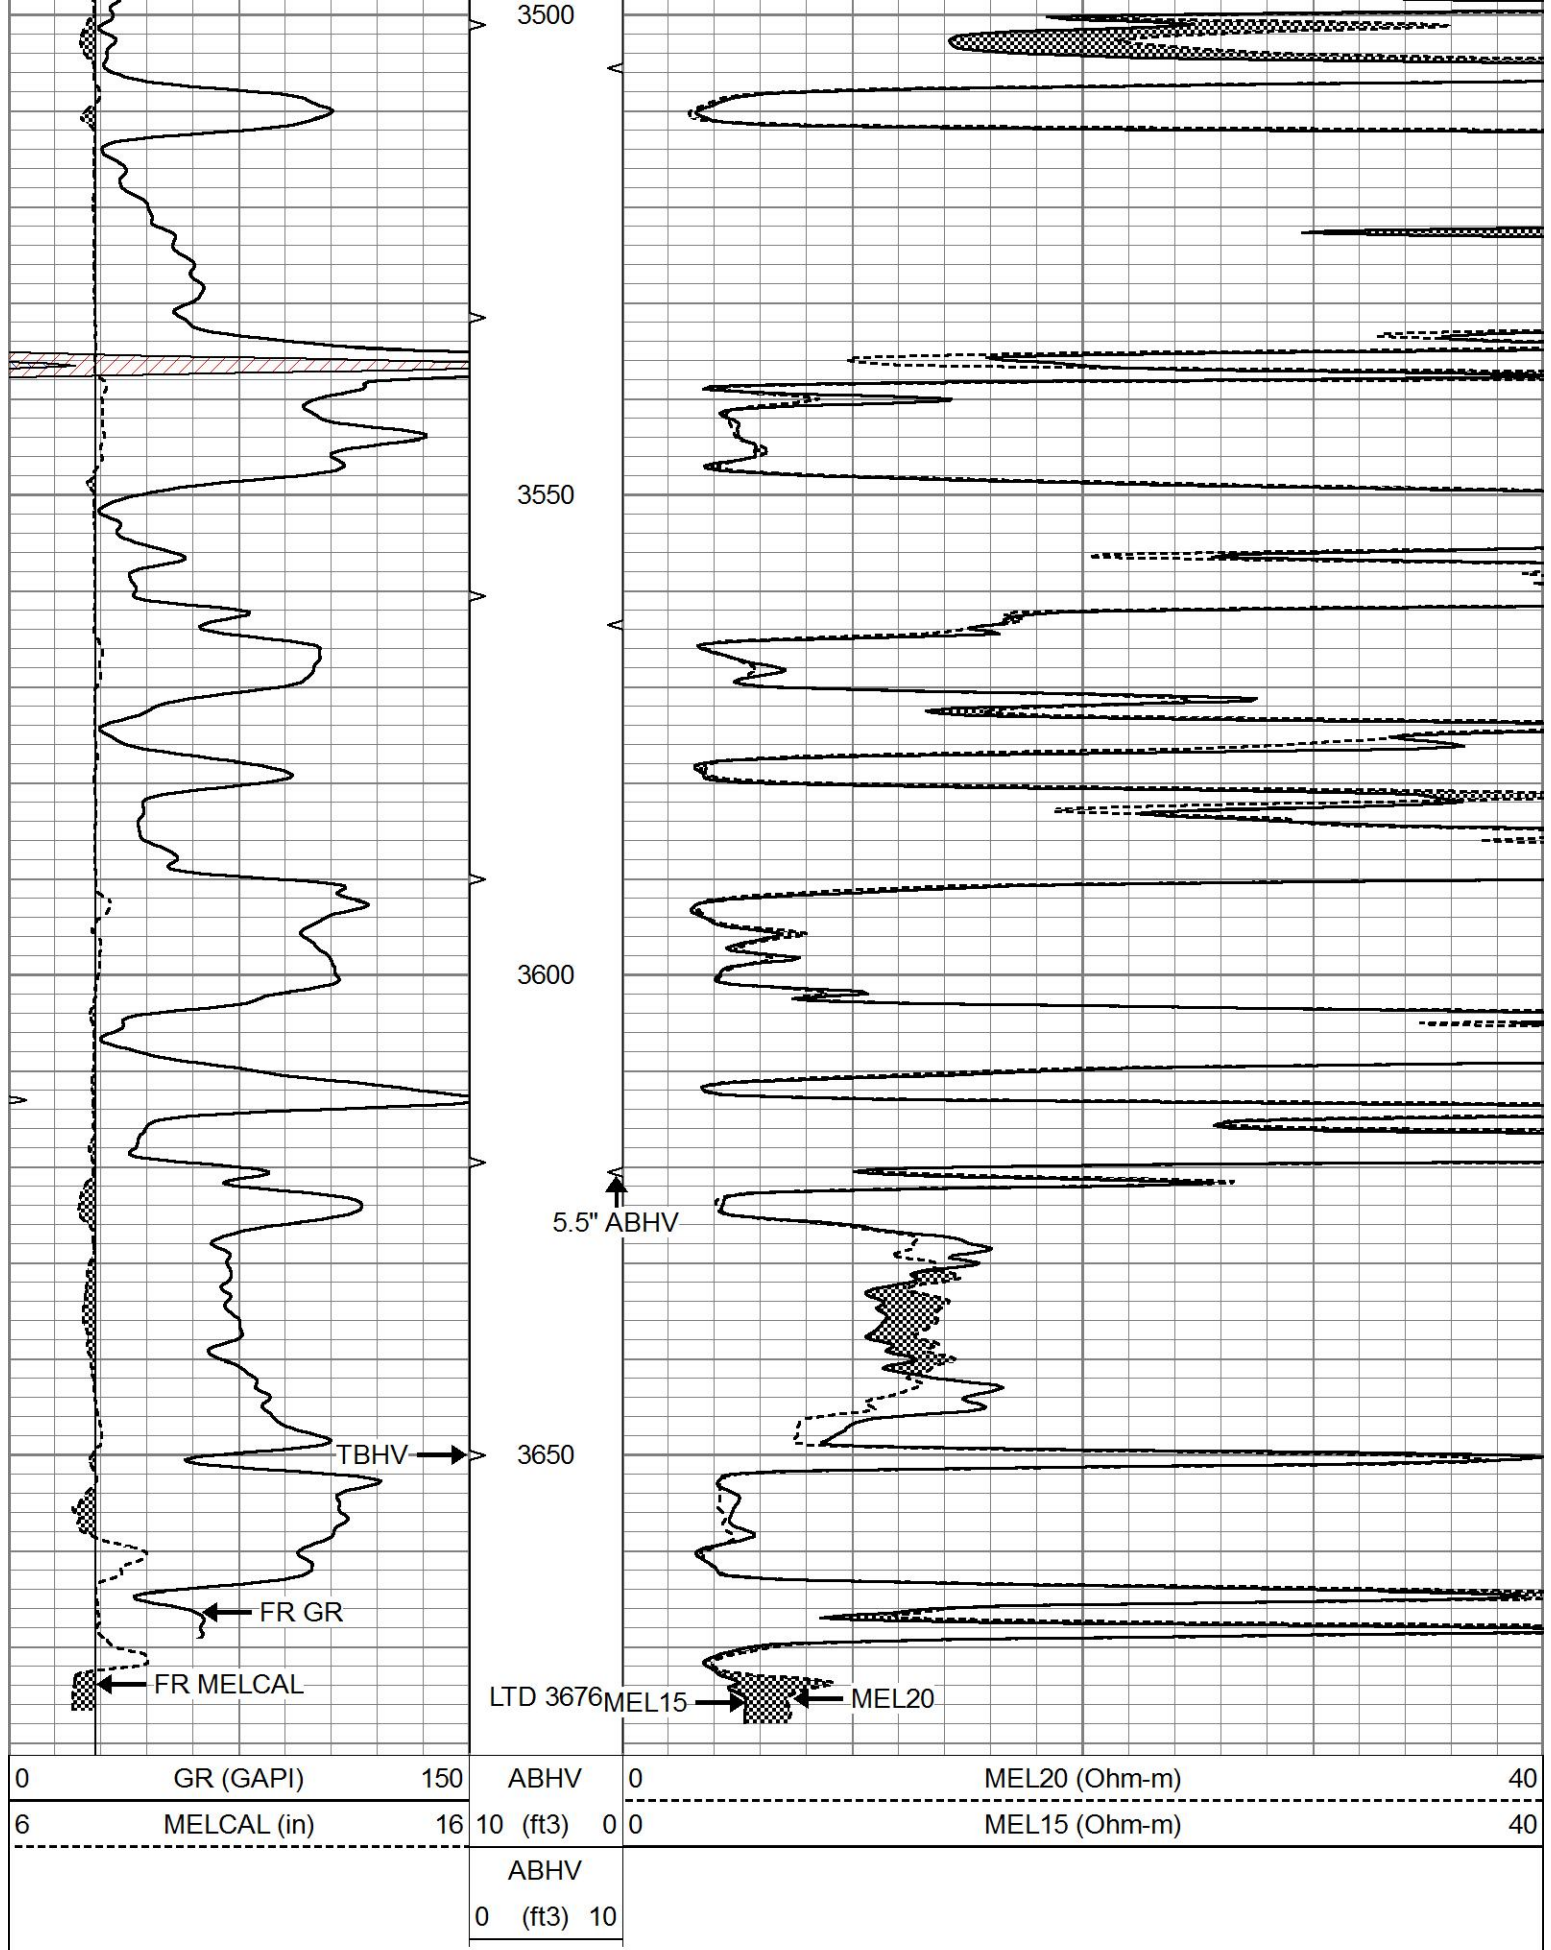



REPEAT SECTION

REFLECT SECTION

Database File 8218ddn.db
Dataset Pathname pass5.1
Presentation Format micro
Dataset Creation Sun Oct 01 07:25:05 2023
Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3) 0	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

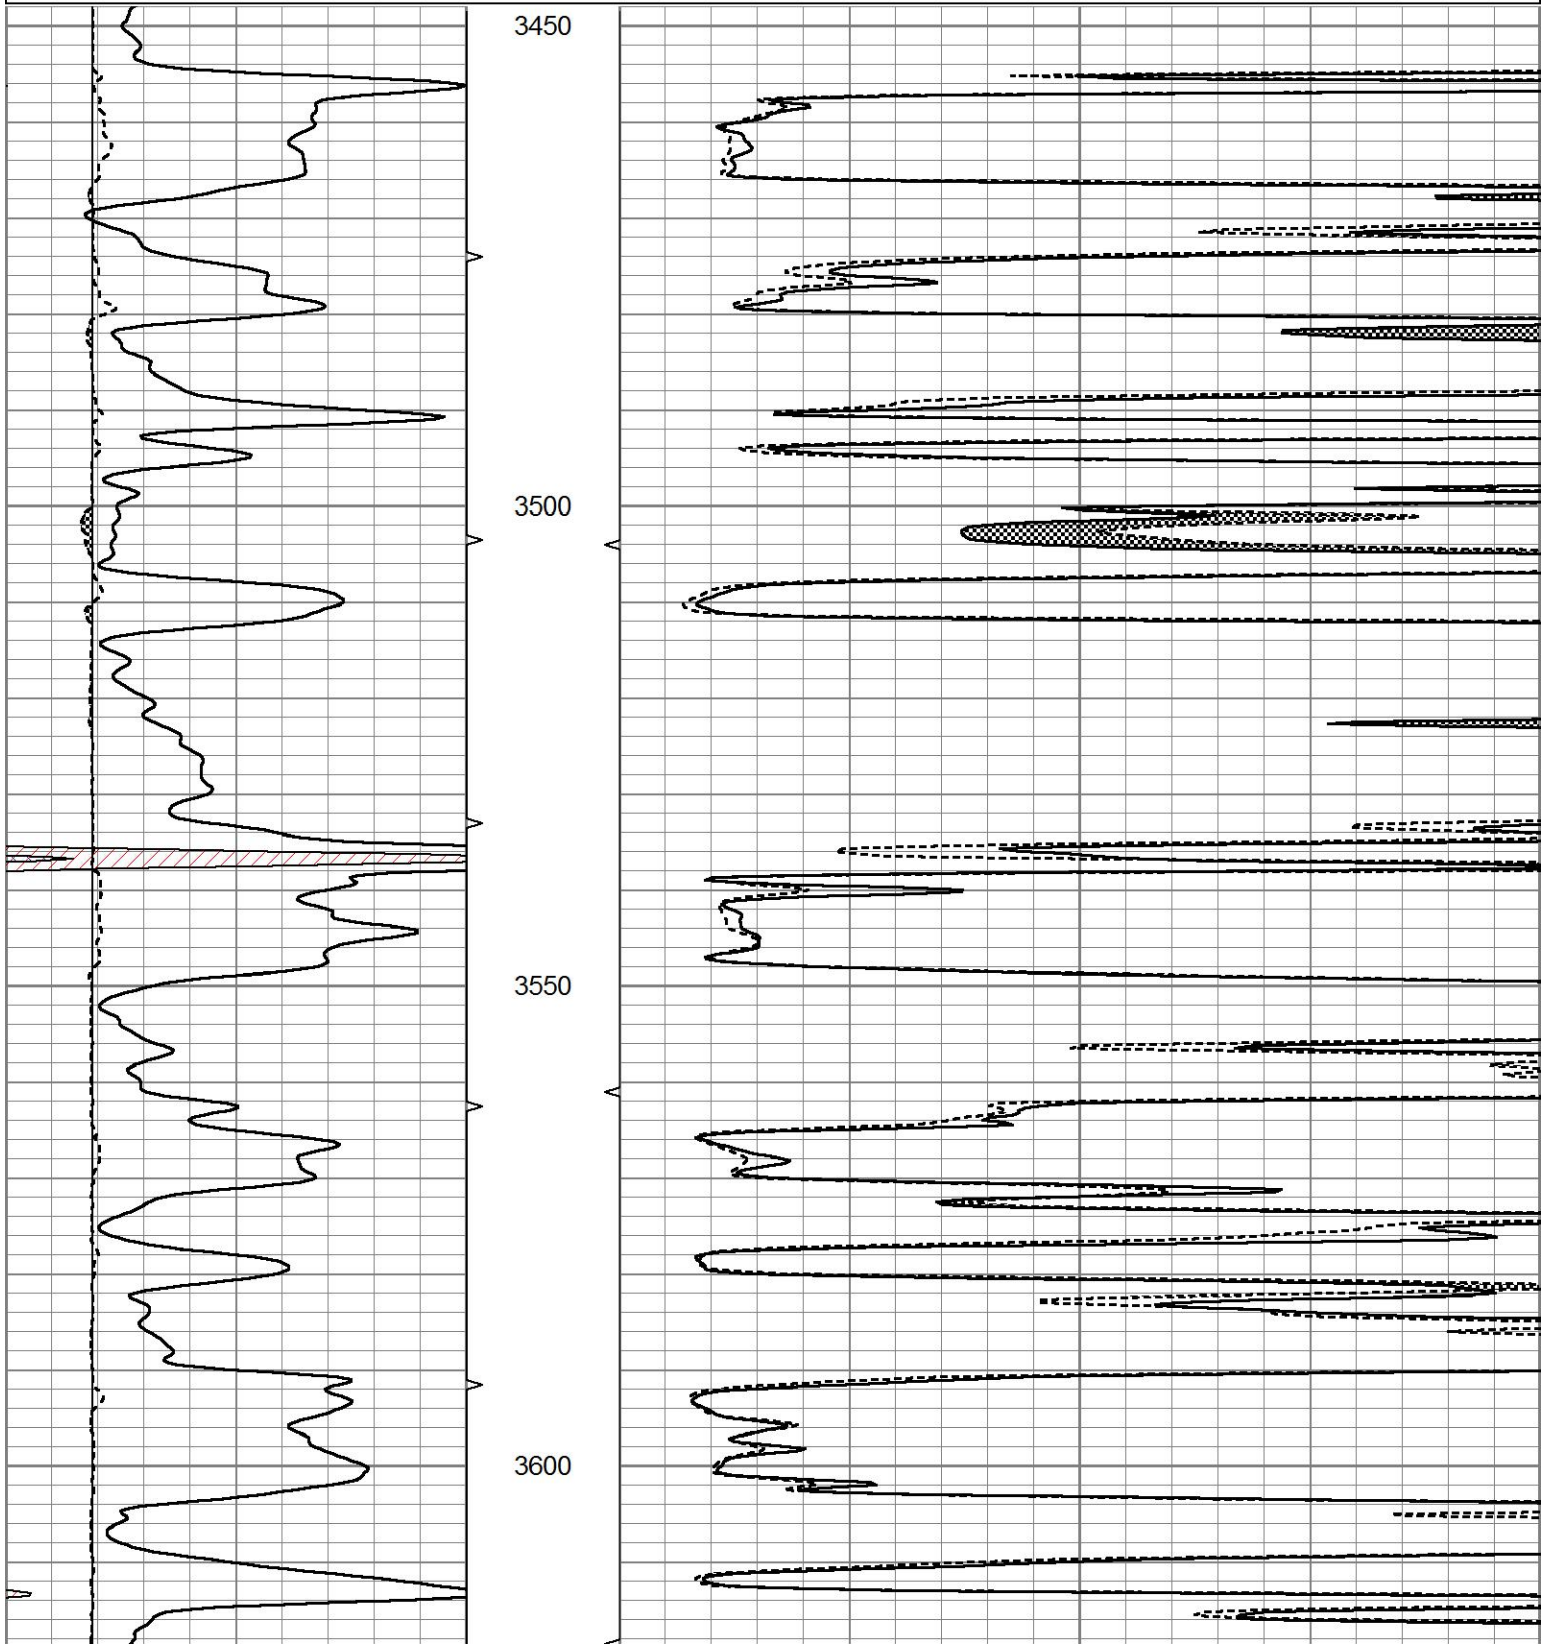

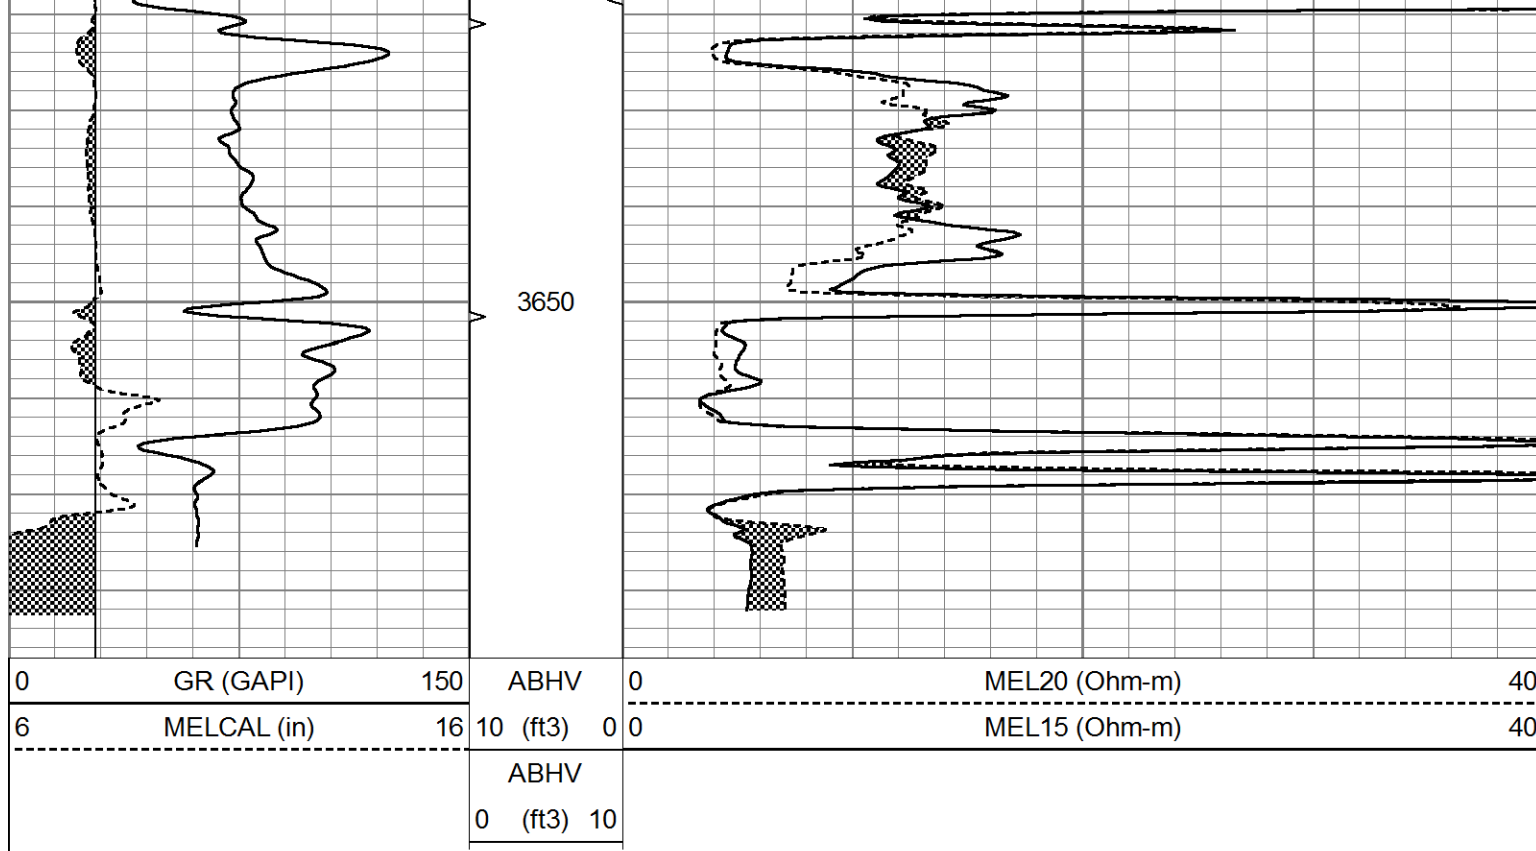

Calibration Report			
Database File	8218ddn.db		
Dataset Pathname	pass6.2		
Dataset Creation	Sun Oct 01 07:36:37 2023		
MICRO Calibration Report			
Serial Number:	070910		
Tool Model:	ProbeN		
Performed:	Wed Sep 20 06:05:59 2023		
Caliper Calibration:	Gain=3.478	Offset=2.087	
References	Low Cal	High Cal	
Readings	8.000	16.000	
	1.700	4.000	
1.5" Calibration:	Gain=50.000	Offset=-1.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.000	1.216	
2" Calibration:	Gain=55.000	Offset=-1.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.002	1.053	
Gamma Ray Calibration Report			
Serial Number:	070559		
Tool Model:	OPEN_GR		
Performed:	Sun May 14 16:49:25 2023		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	

Calibrator Reading:

1.0

cps

Sensitivity:

0.3000

GAPI/cps