

MICRO LOG

Company		MULL DRILLING COMPANY, INC.	
Well		CARTER - JOHNSON #1-1	
Field		PRAIRIE RIDGE NORTHWEST	
County		LANE	State KANSAS
Location:		API # : 15-101-22672-0000 2164' FNL & 200' FEL NE - SE - SE - NE	
Permanent Datum		SEC 1	TWP 16S RGE 27W
Log Measured From		GROUND LEVEL	Elevation 2619
Drilling Measured From		KELLY BUSHING 7' A.G.L	K.B. 2626 D.F. 2624 G.L. 2619
Date	5/17/22		
Run Number	TWO		
Depth Driller	4625		
Depth Logger	4625		
Bottom Logged Interval	4609		
Top Log Interval	3800		
Casing Driller	8 5/8" @ 223'		
Casing Logger	223		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 2000 PPM	
Density / Viscosity	9.3/57		
pH / Fluid Loss	10.0/5.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.55 @ 76F		
Rmf @ Meas. Temp	1.17 @ 76F		
Rmc @ Meas. Temp	1.86 @ 76F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.966 @ 122F		
Time Circulation Stopped	4 HOURS		
Time Logger on Bottom	12:30 A.M.		
Maximum Recorded Temperature	122F		
Equipment Number	3802		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	BLAKE MILLER		


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS


UTICA, KS., 3W. TO "RD. C" (CASTLE ROCK RD.) 4N., 1/2W. INTO

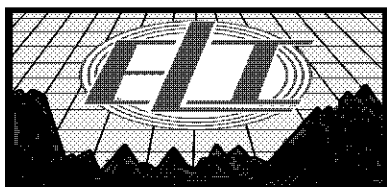



MAIN SECTION

Database File	6527pe.db
Dataset Pathname	pass6.2
Presentation Format	_micro
Dataset Creation	Tue May 17 01:23:16 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

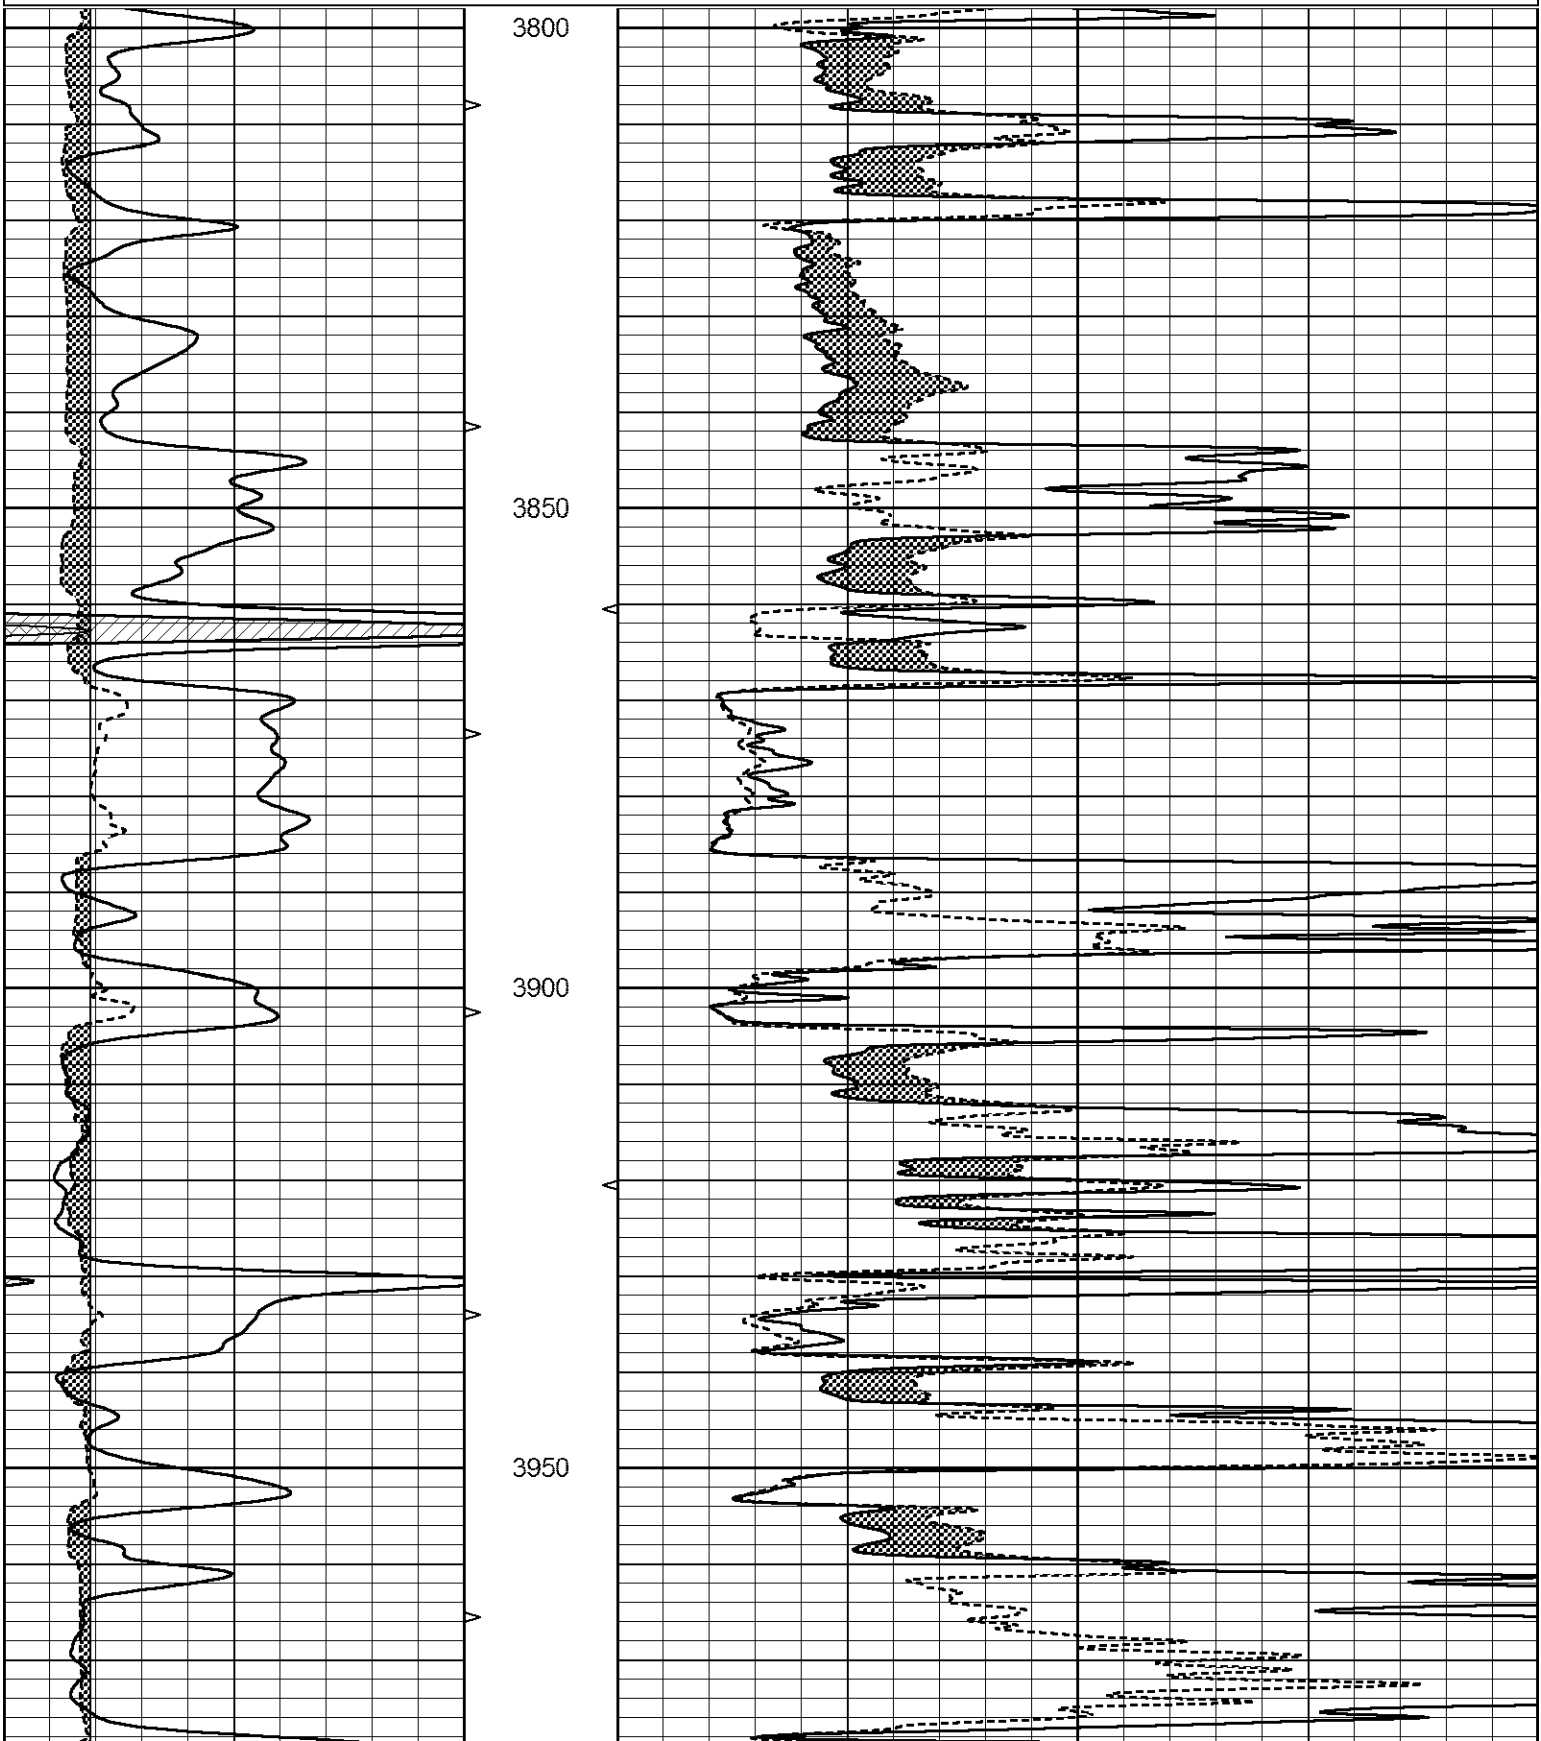

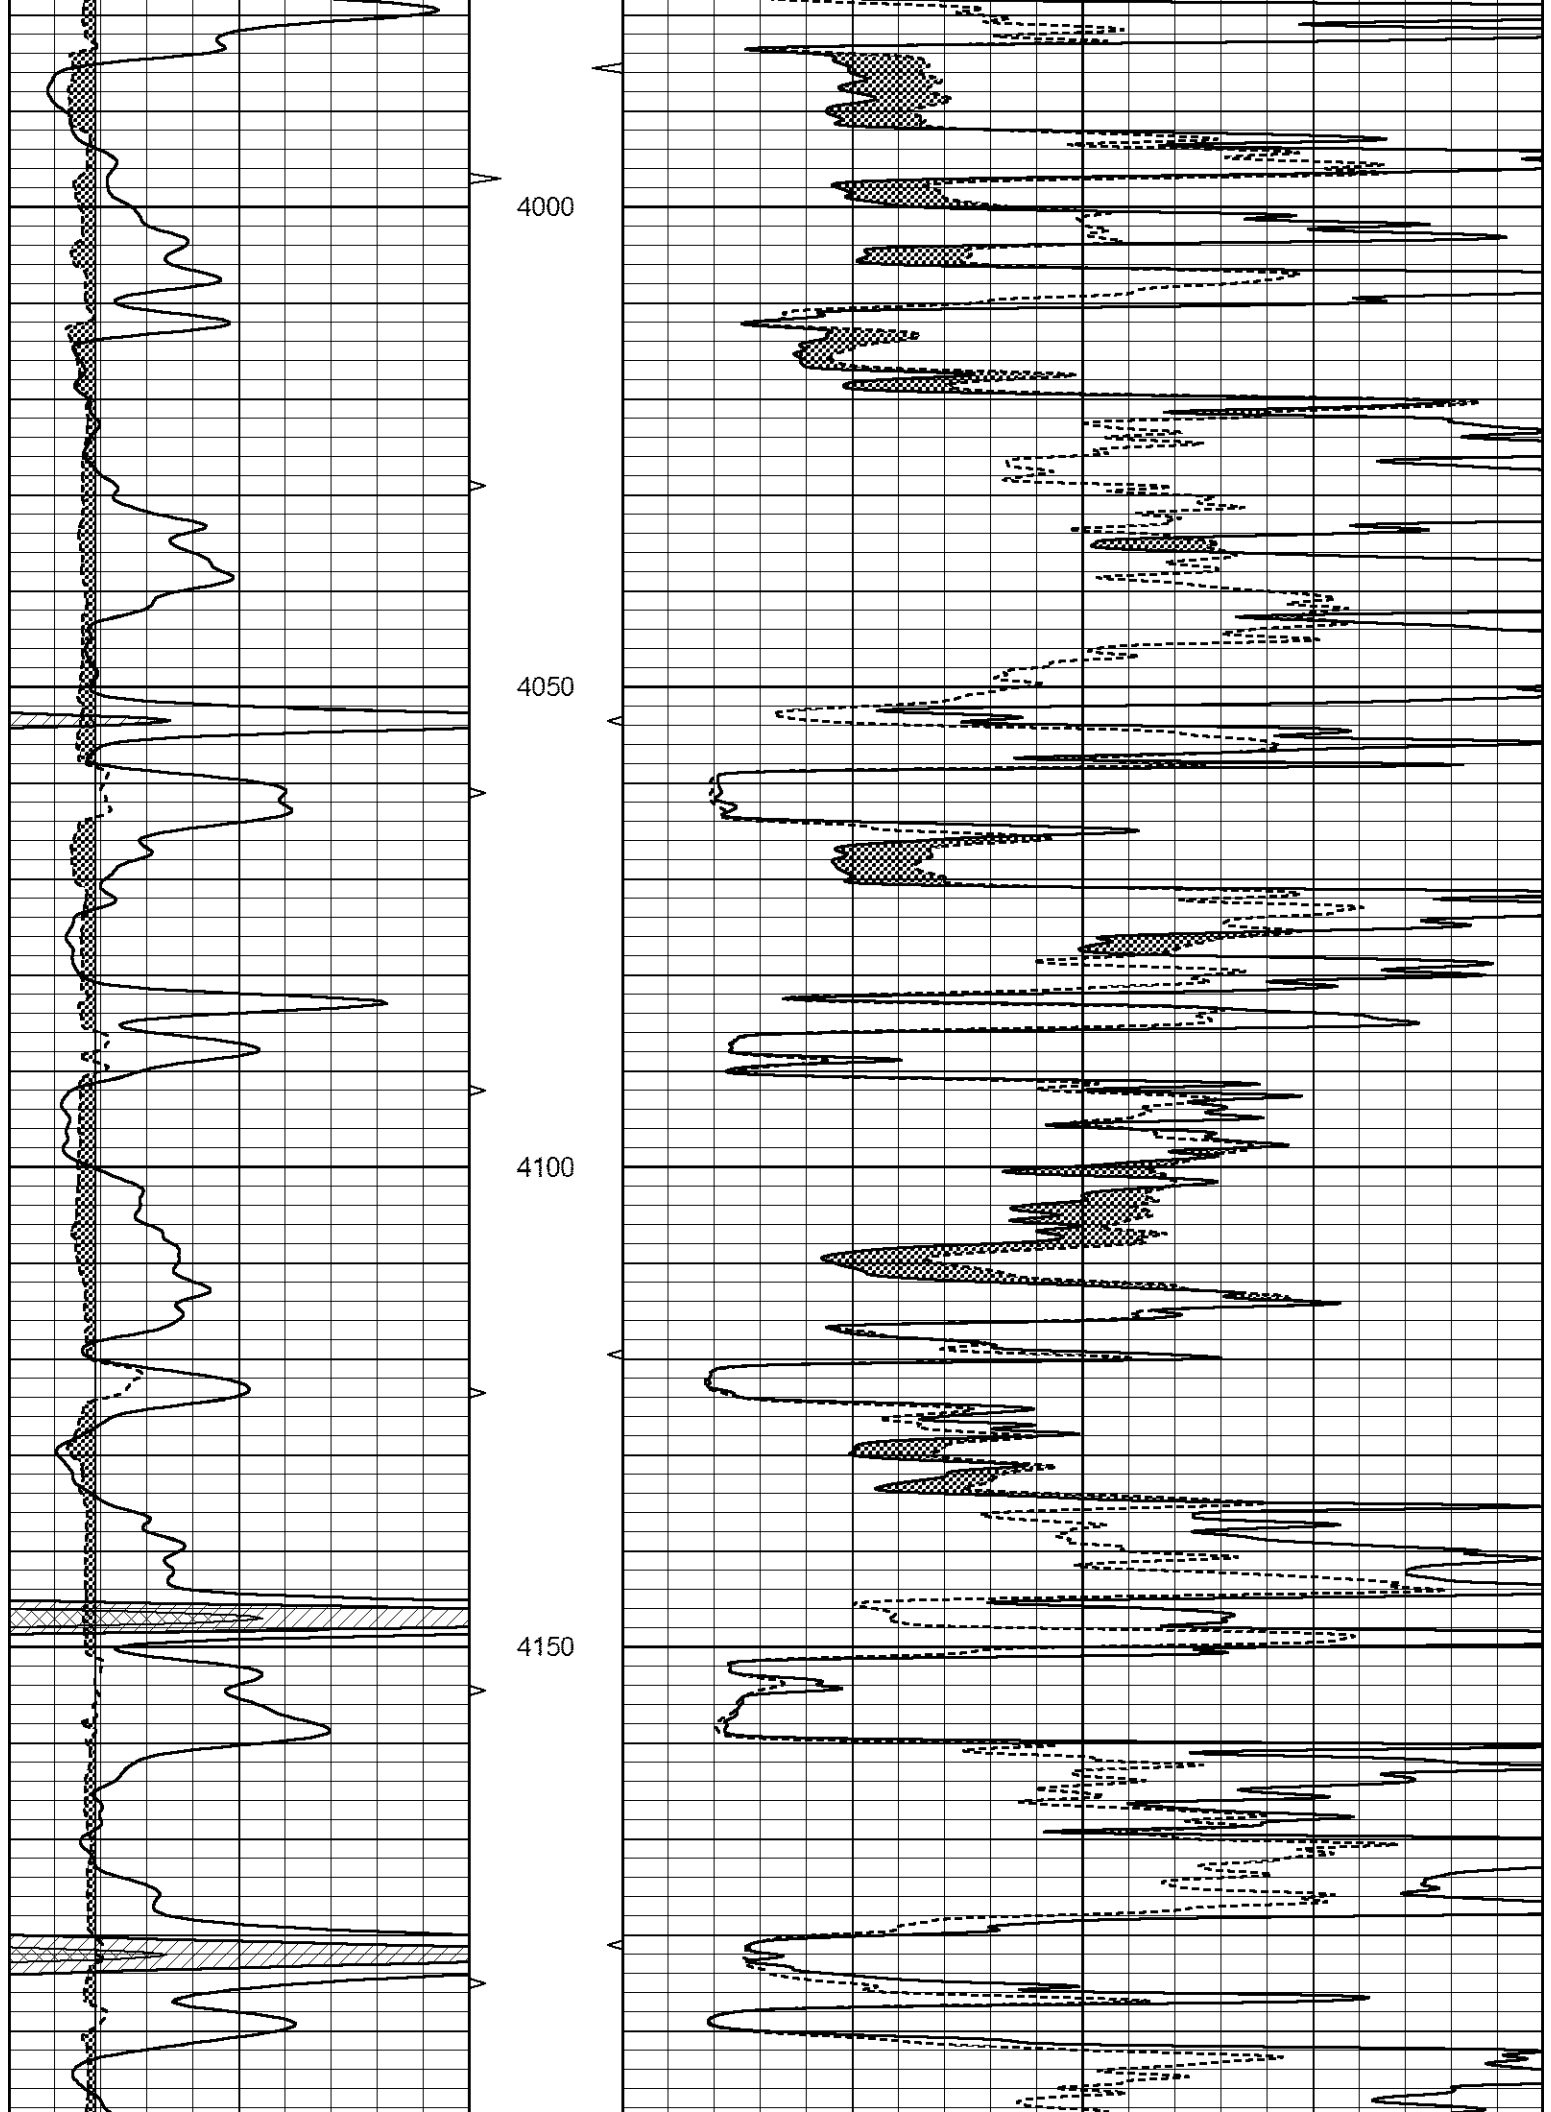

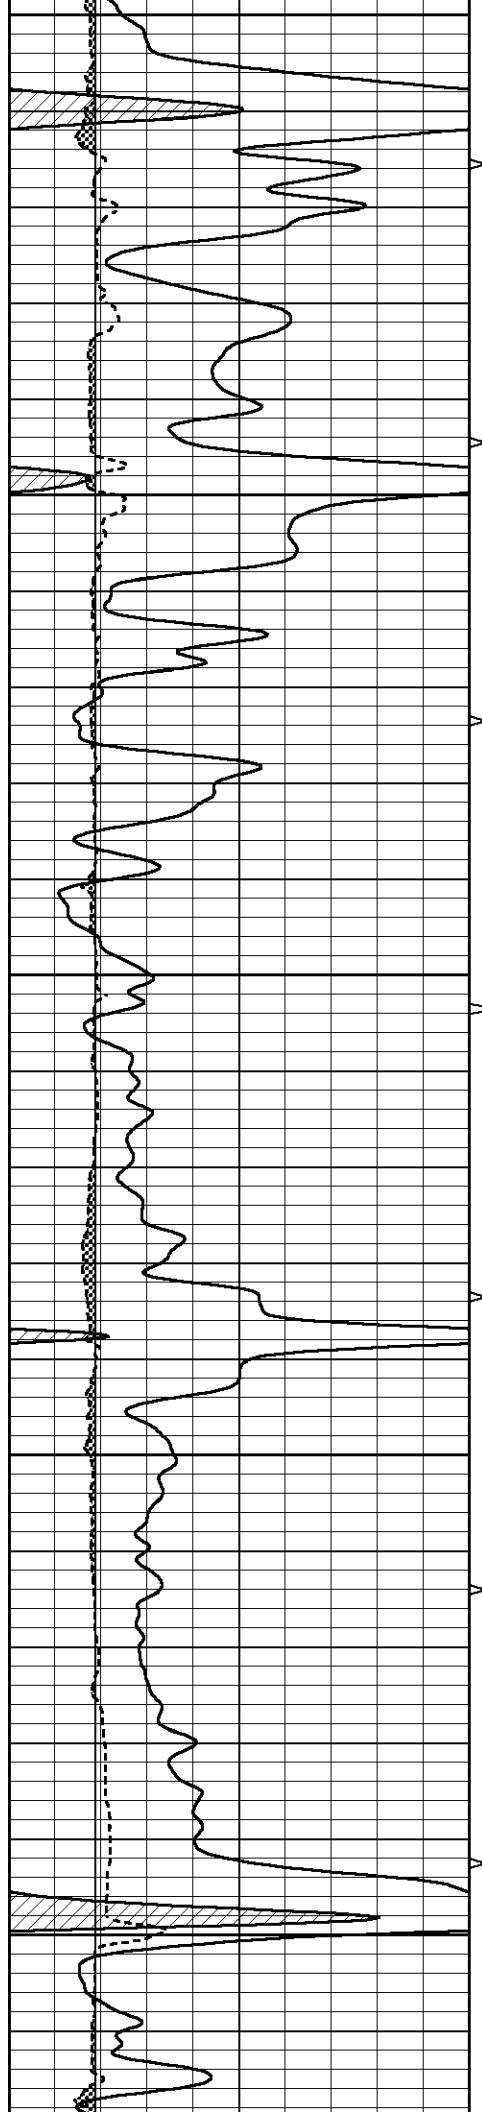


4200


4250

4300

4350

4400

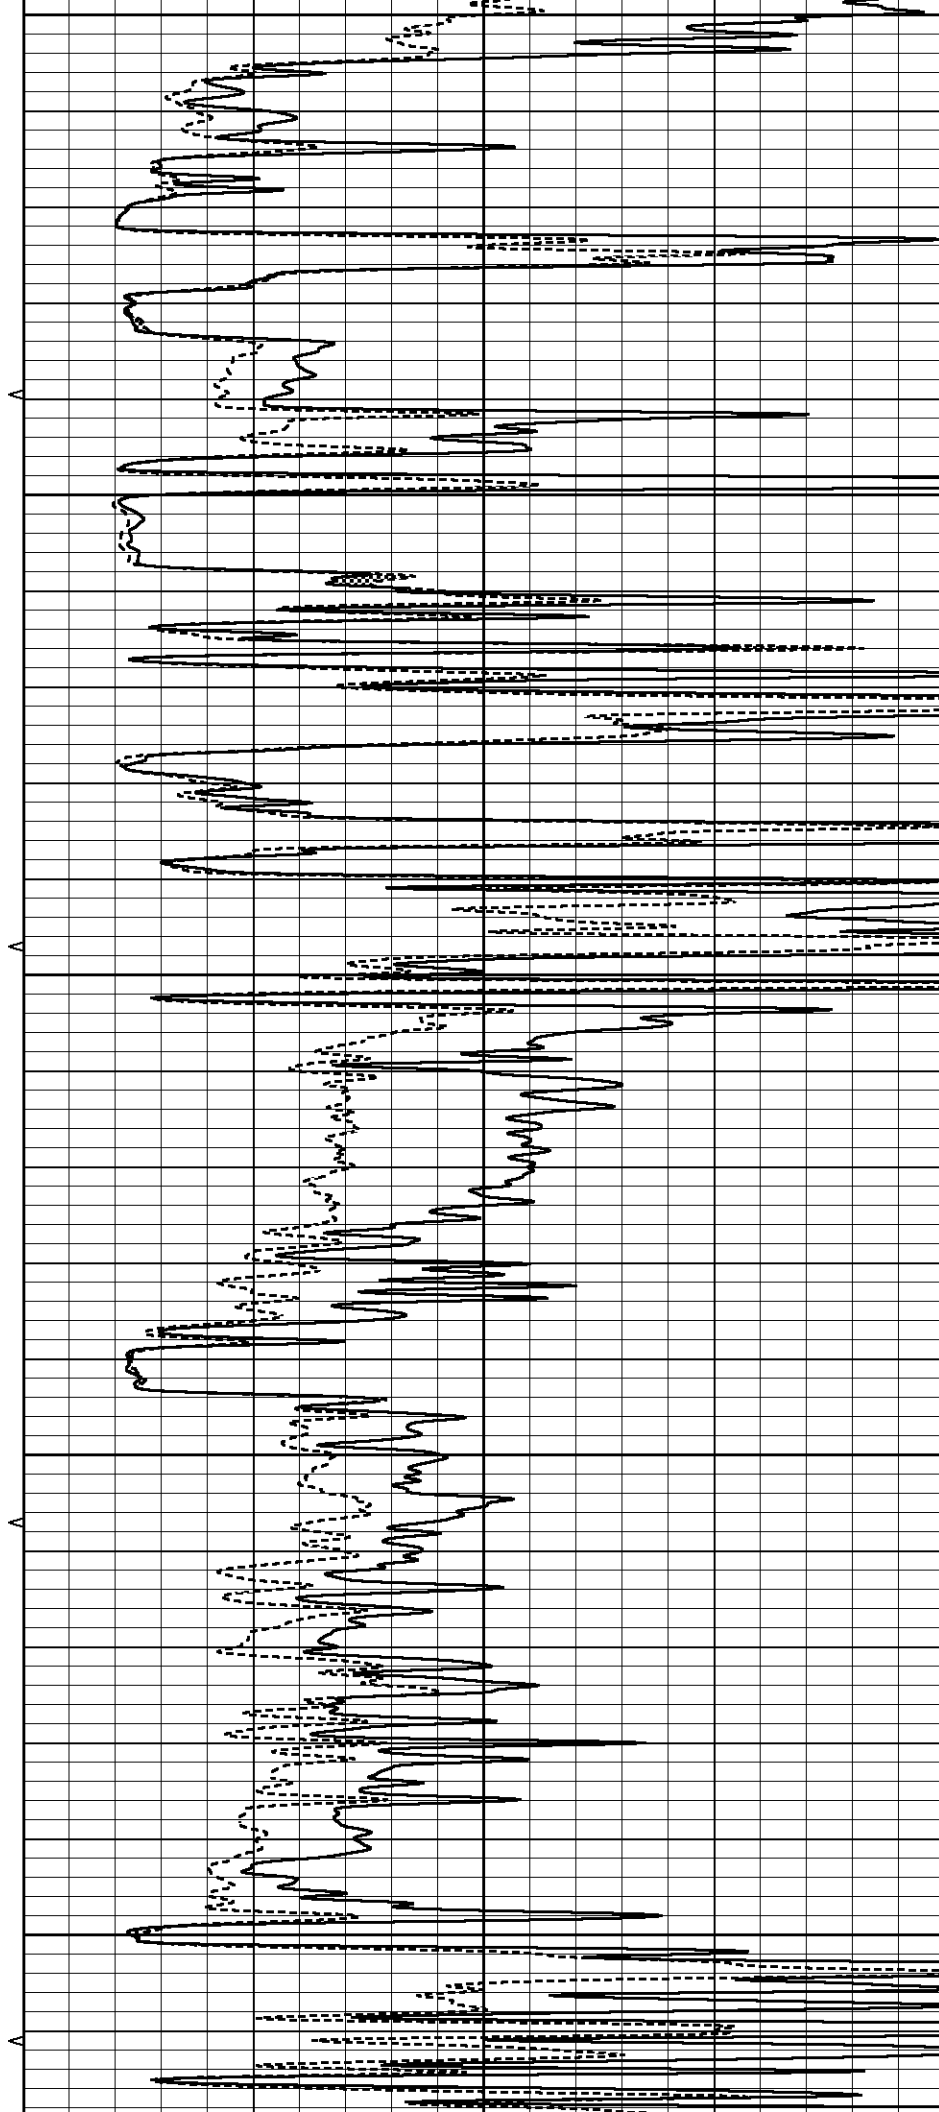

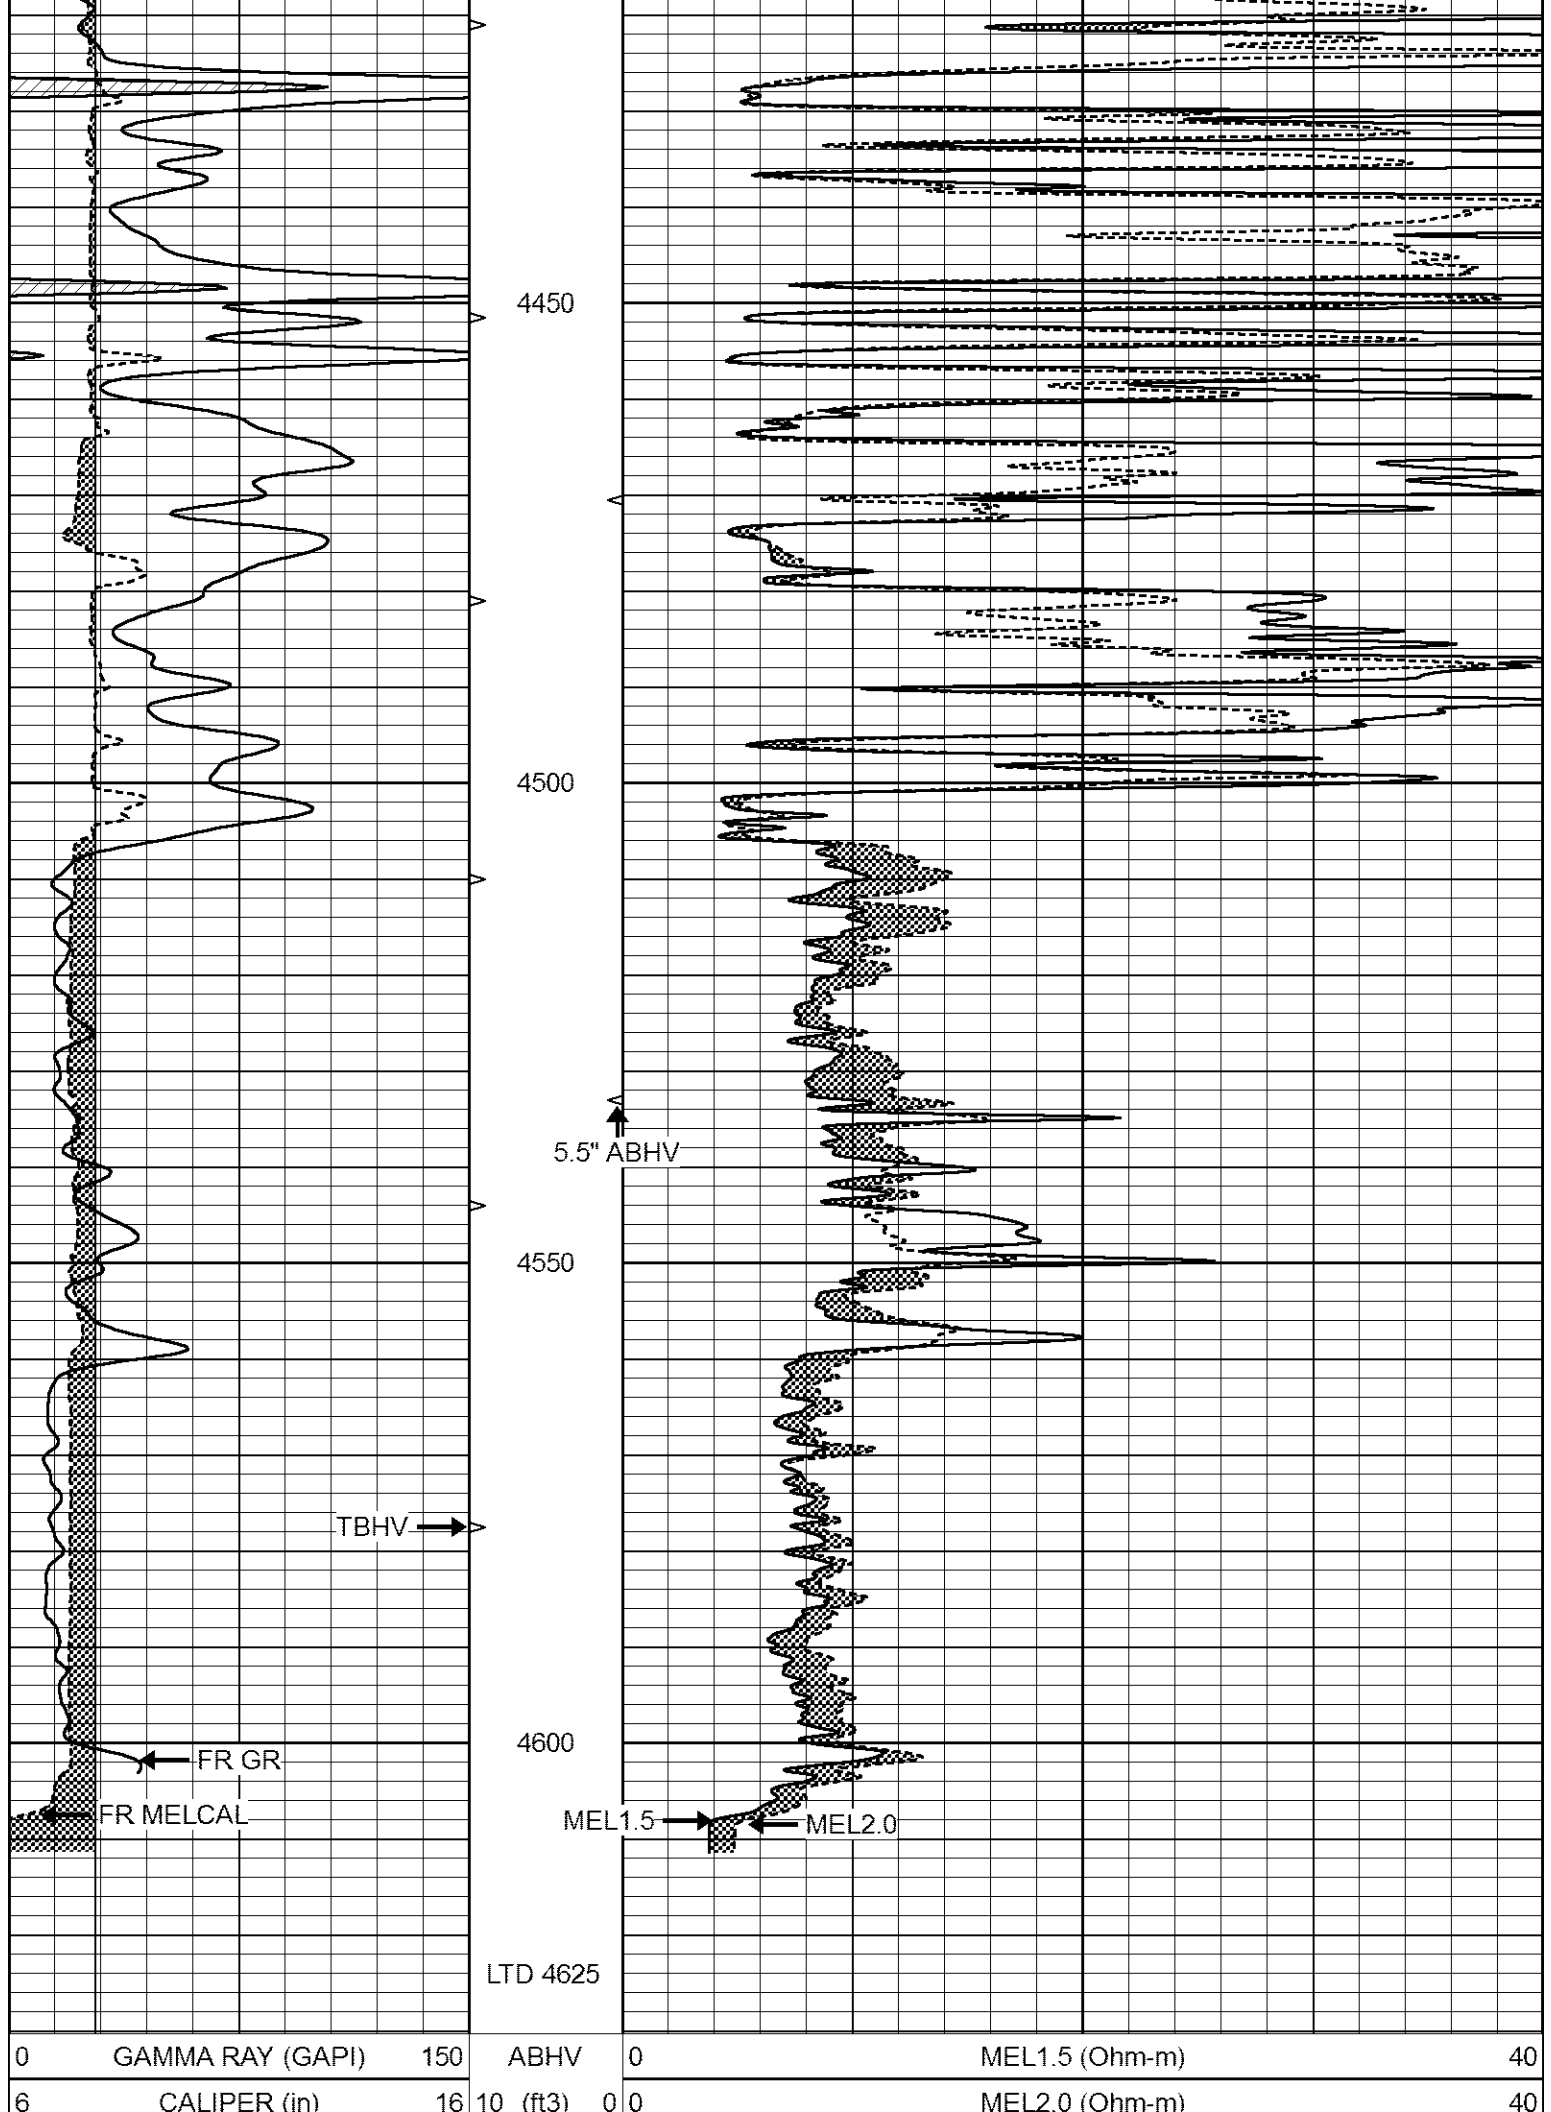


TBHV
0 (ft3) 10




REPEAT SECTION

Database File 6527pe.db
Dataset Pathname pass5.1
Presentation Format _micro
Dataset Creation Tue May 17 01:24:58 2022
Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0 0	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3) 10			

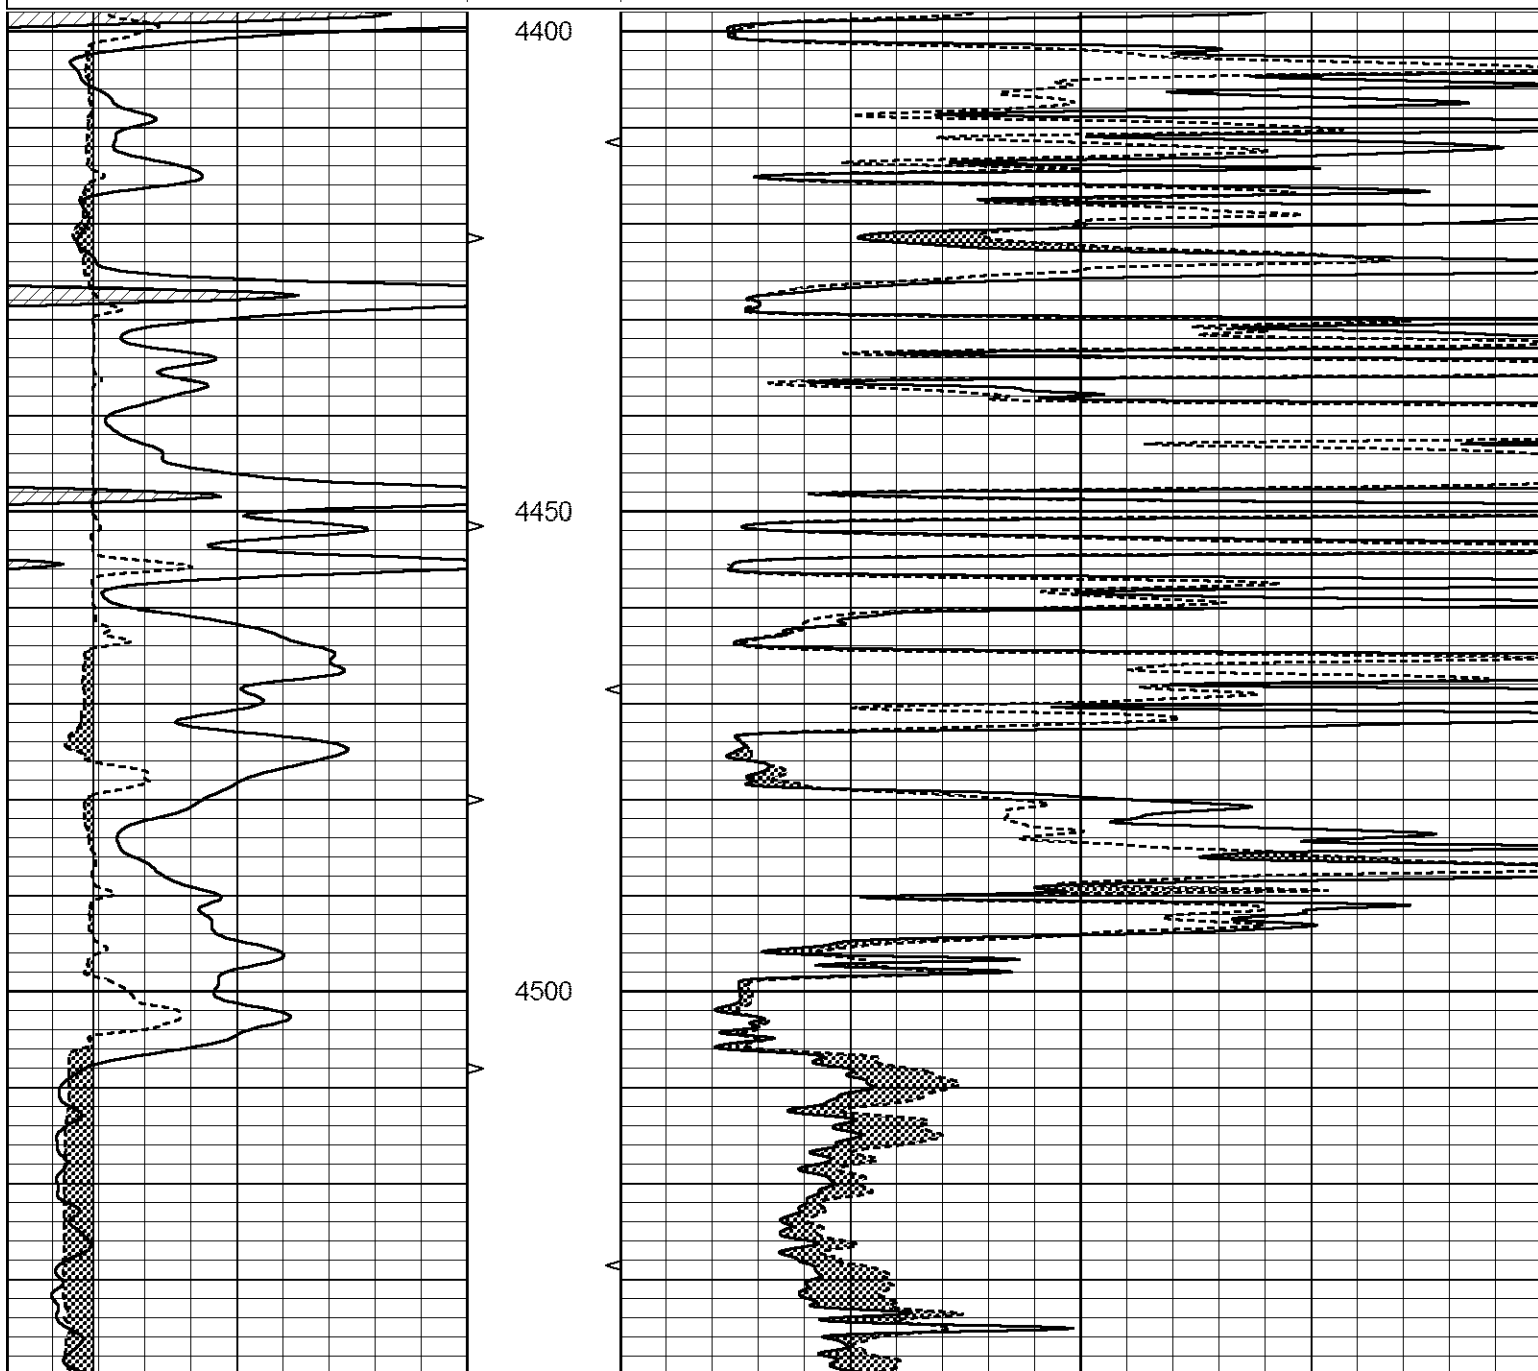

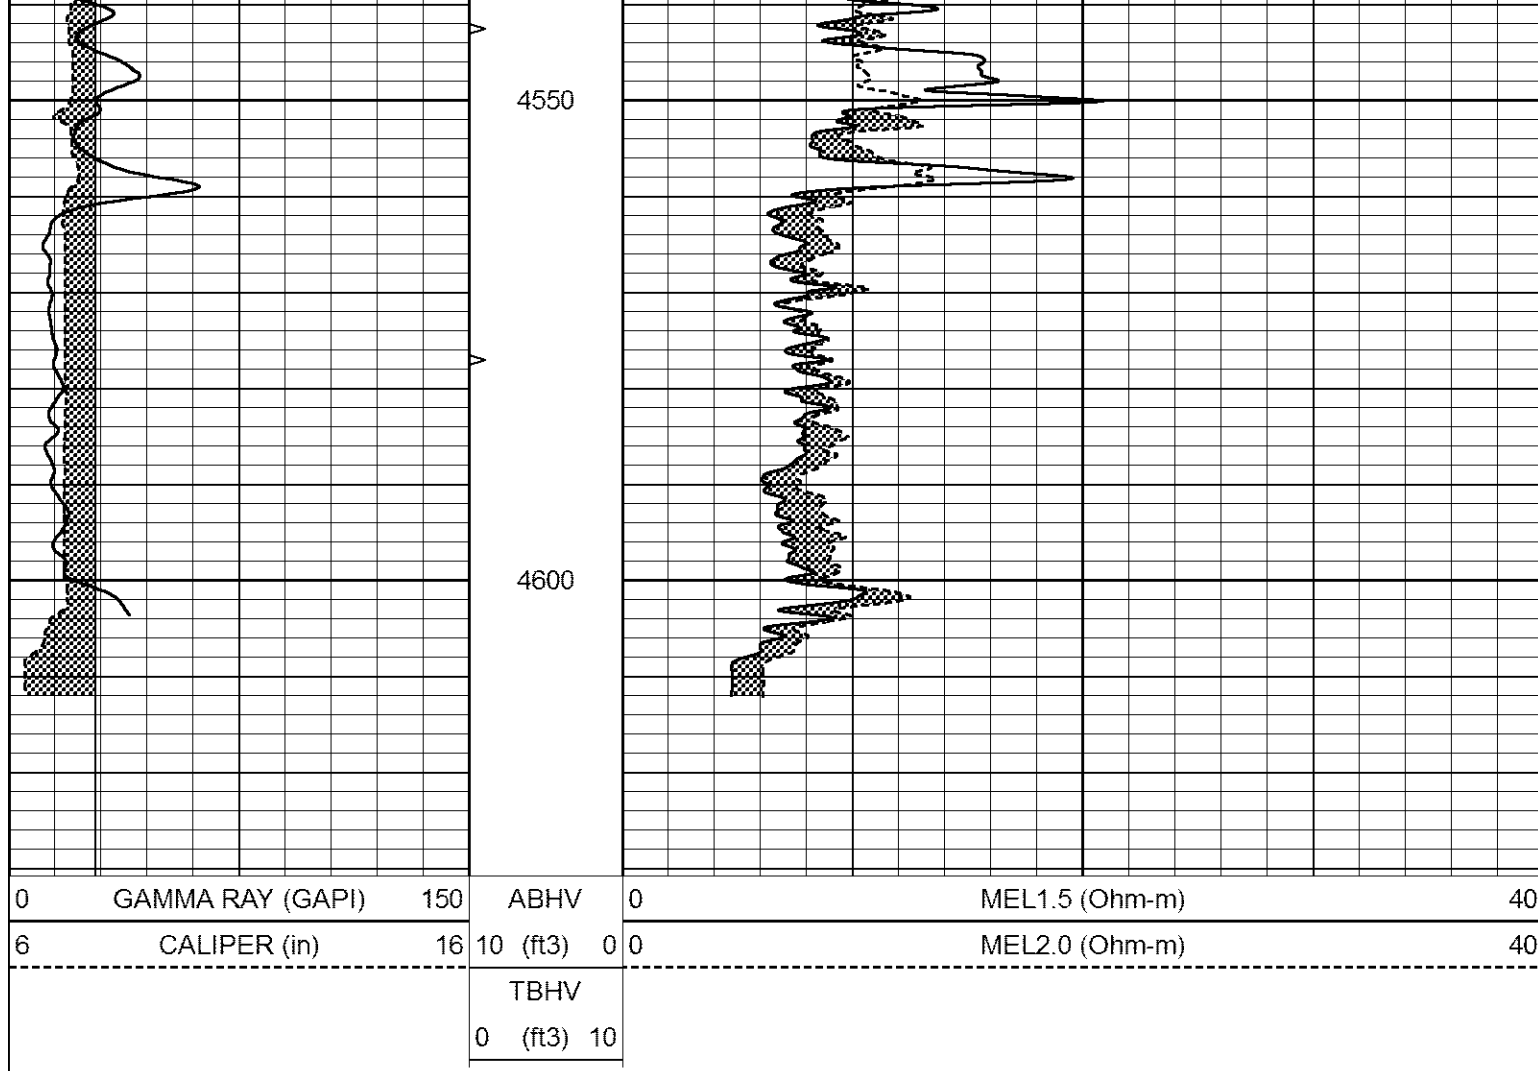

Calibration Report

Database File 6527pe.db
 Dataset Pathname pass6.2
 Dataset Creation Tue May 17 01:23:16 2022

MICRO_USR Calibration Report

Serial Number:	070910	
Tool Model:	ProbeL	
Performed:	Sun May 15 03:38:42 2022	
Caliper Calibration:	Gain=7.238	Offset=2.731
References	Low Cal 8.000	High Cal 14.000
Readings	0.728	1.557
1.5" Calibration:	Gain=30.000	Offset=2.000
References	Low Cal 0.000	High Cal 20.000
Readings	0.004	1.335
2" Calibration:	Gain=48.000	Offset=1.500
References	Low Cal 0.000	High Cal 20.000
Readings	0.004	1.029

Microlog Calibration Report

Serial Model: 070910 ProbeL

Serial-Model:
Performed:

070910-ProbeL
(Not Performed)

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Inverse	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000

Gamma Ray Calibration Report

Serial Number:	070558	
Tool Model:	Probe1	
Performed:	Sat May 14 08:15:06 2022	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2500	GAPI/cps