



MICRO LOG

Company	McCOY PETROLEUM CORPORATION	Company	McCOY PETROLEUM CORPORATION
Well	NORRIS "A" #1-19	Well	NORRIS "A" #1-19
Field	UNNAMED	Field	UNNAMED
County	SUMNER	County	SUMNER
State	KANSAS	State	KANSAS
Location:	API # : 15-191-22844-0000 1980' FSL & 990' FWL E/2 - NW - SW	Other Services CDL/CNL/PE DIL/SONIC	
Permanent Datum	SEC 9 TWP 33S RGE 1E	Elevation	
Log Measured From	GROUND LEVEL Elevation 1171 KELLY BUSHING 12' A.G.L.	K.B. 1183 D.F. 1181 G.L. 1171	
Drilling Measured From	KELLY BUSHING		
Date	6/28/22		
Run Number	TWO		
Depth Driller	4200		
Depth Logger	4200		
Bottom Logged Interval	4184		
Top Log Interval	2500		
Casing Driller	8 5/8"@253'		
Casing Logger	268		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES: 1,800 PPM	
Density / Viscosity	9.0/49		
pH / Fluid Loss	10.5/10.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.10@98F		
Rmf @ Meas. Temp	.825@98F		
Rmc @ Meas. Temp	1.32@98F		
Source of Rmf / Rmc	MEASURED		
Rm @ BHT	.914@118F		
Time Circulation Stopped	6 HOURS		
Time Logger on Bottom	4:00 P.M.		
Maximum Recorded Temperature	118F		
Equipment Number	8916		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	DAVE WILLIAMS		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395
DIRECTIONS:
WELLINGTON, KS., (JUNCTION HWY 160 & 81) 3 1/2S. TO "RD. E60TH", 3E. TO "SENECA RD.", 1S.,
E. OVER TURNPIKE, N. INTO@ GREEN GATES




MAIN SECTION

Database File	6574pe.db
Dataset Pathname	pass6.4
Presentation Format	_micro
Dataset Creation	Tue Jun 28 17:55:09 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

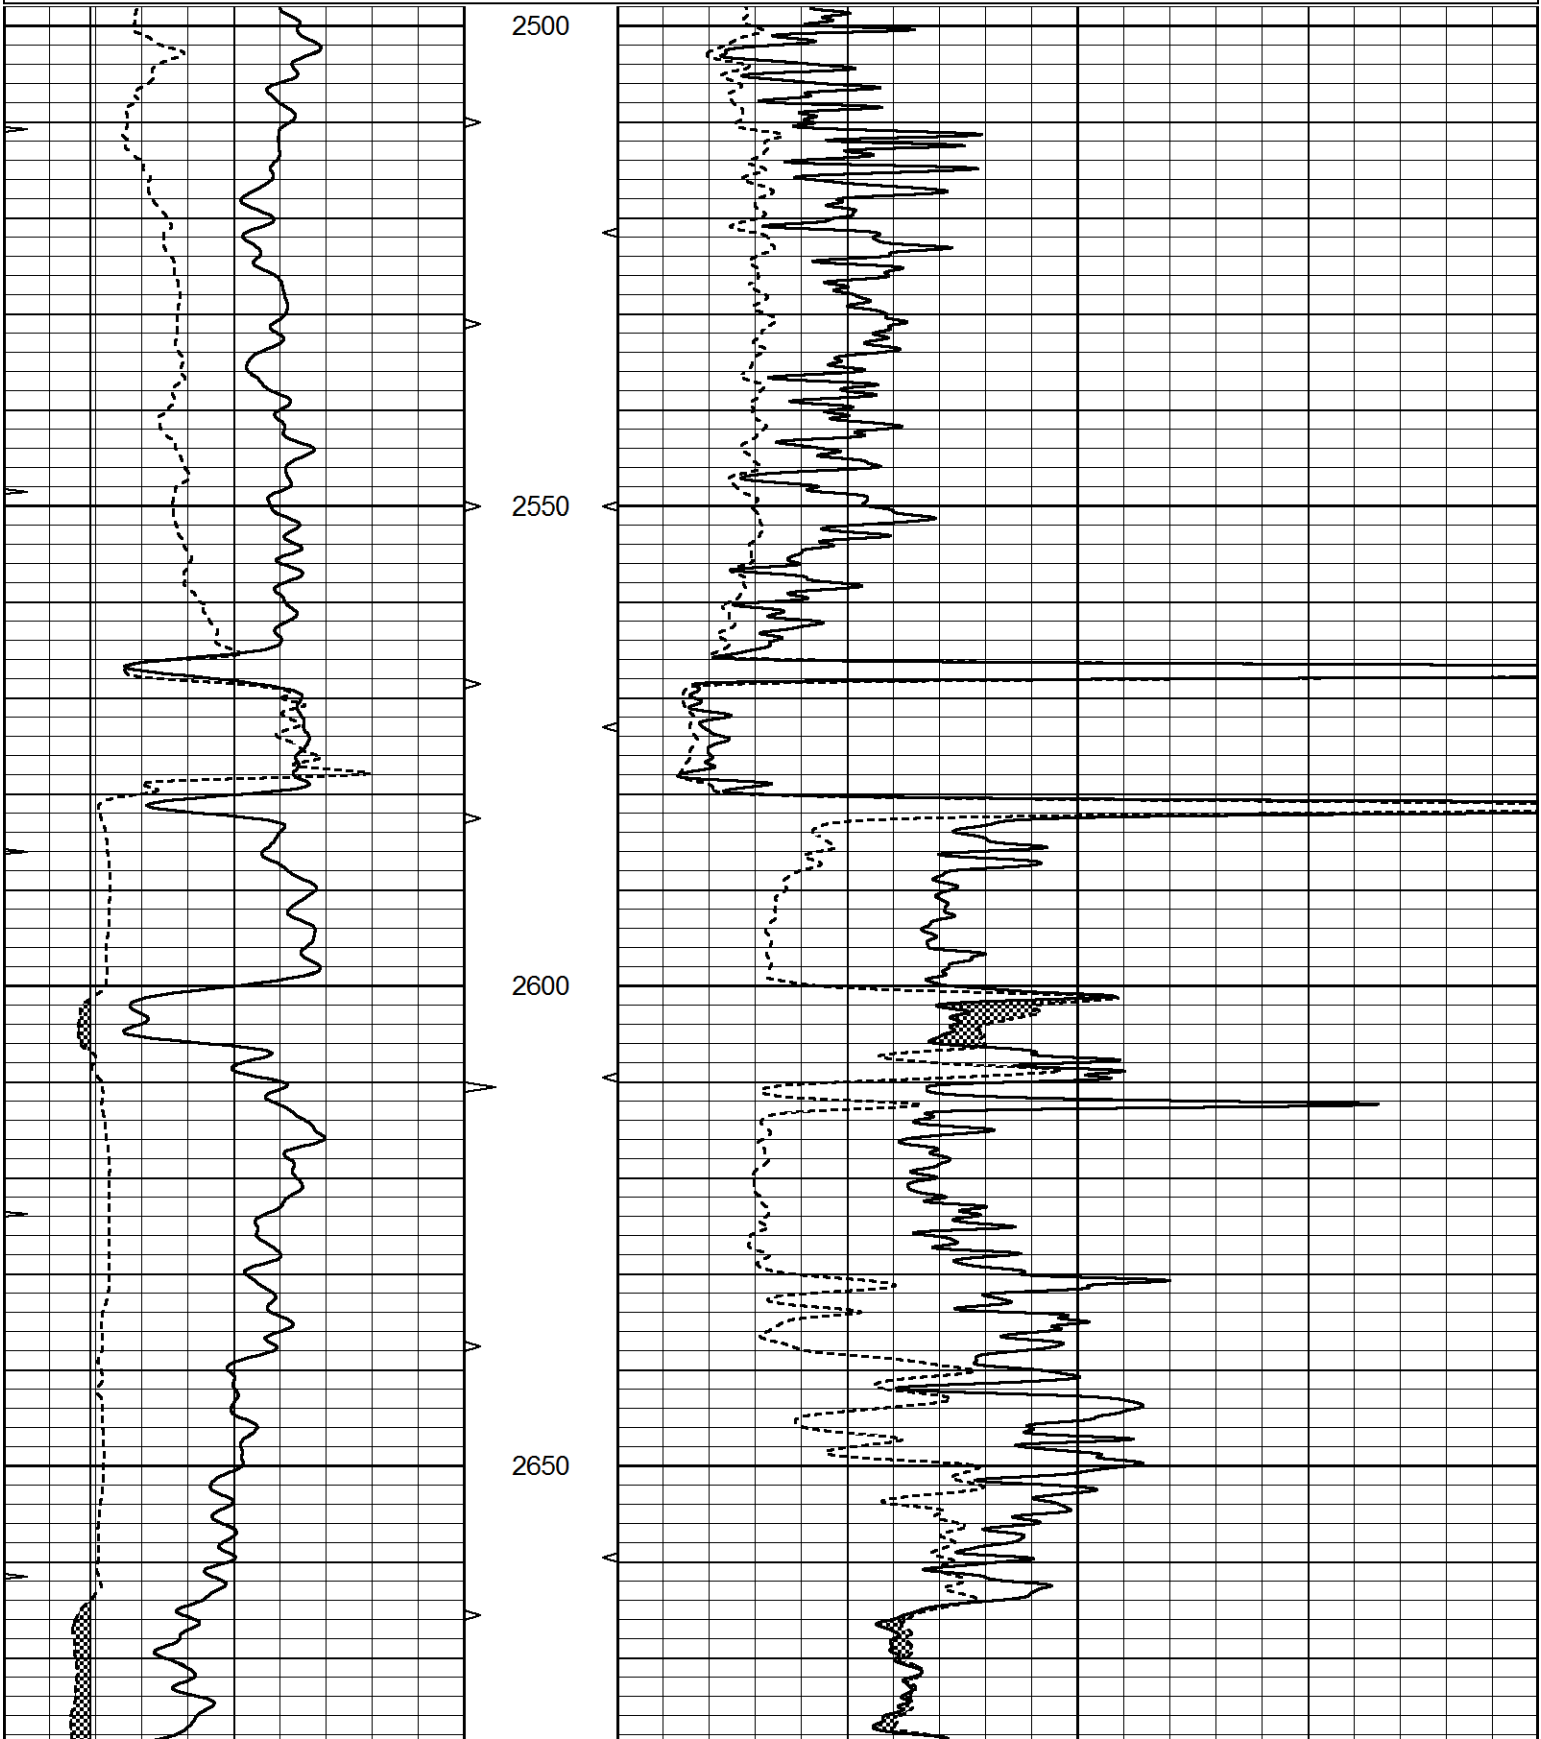

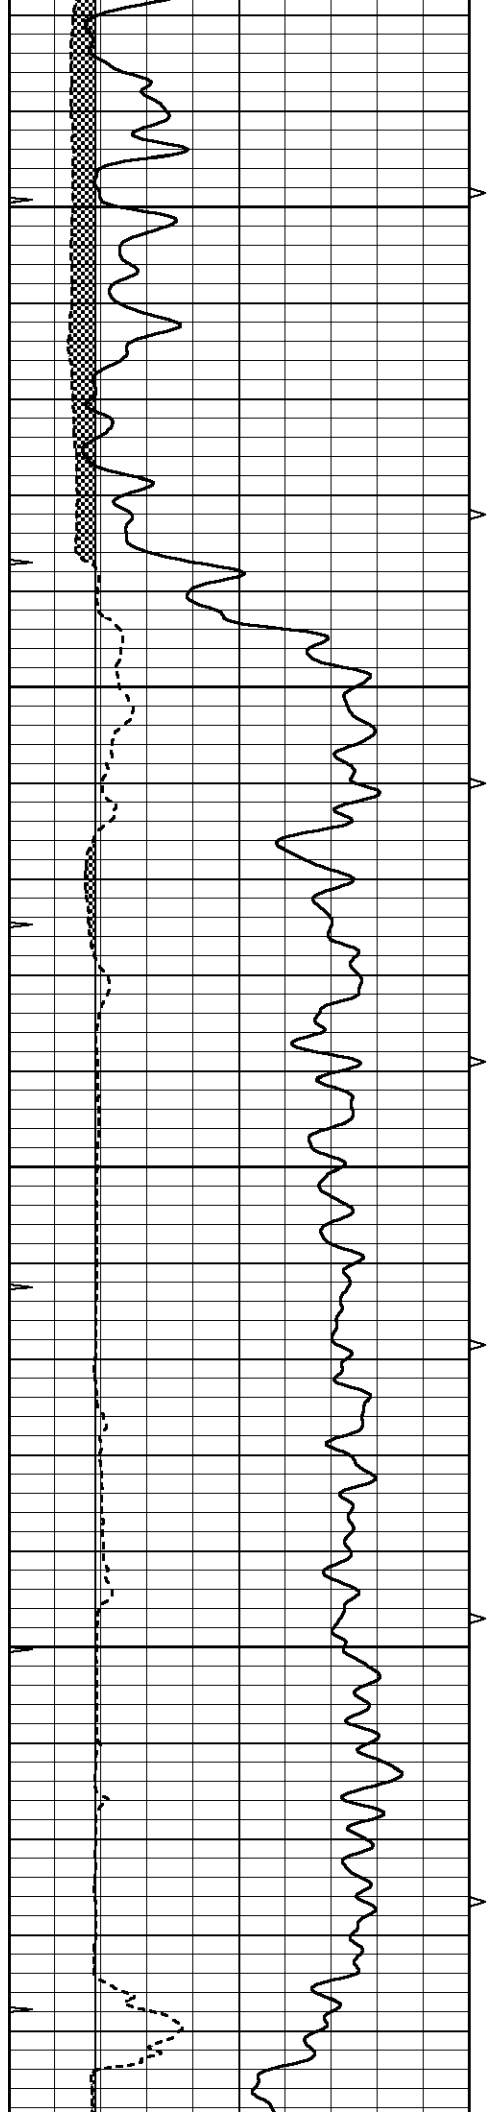



2700

2750


2800


2850

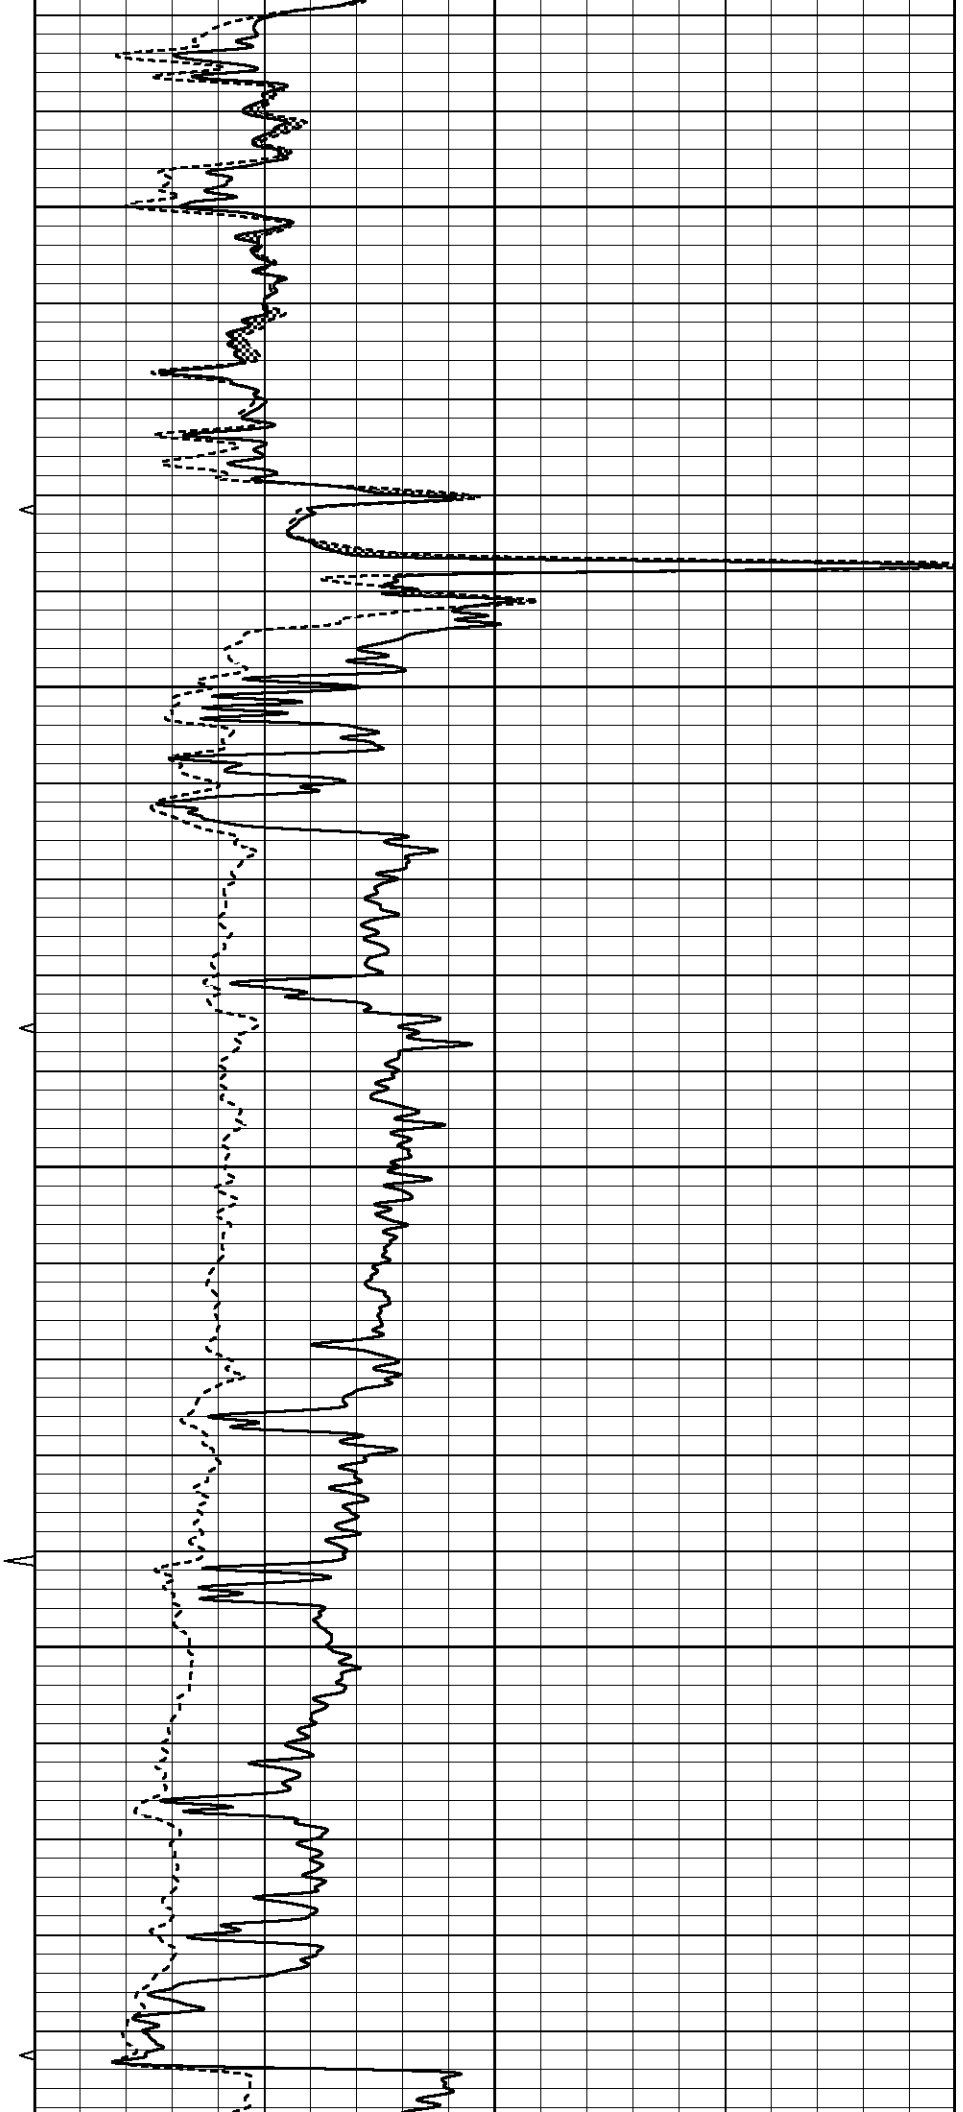

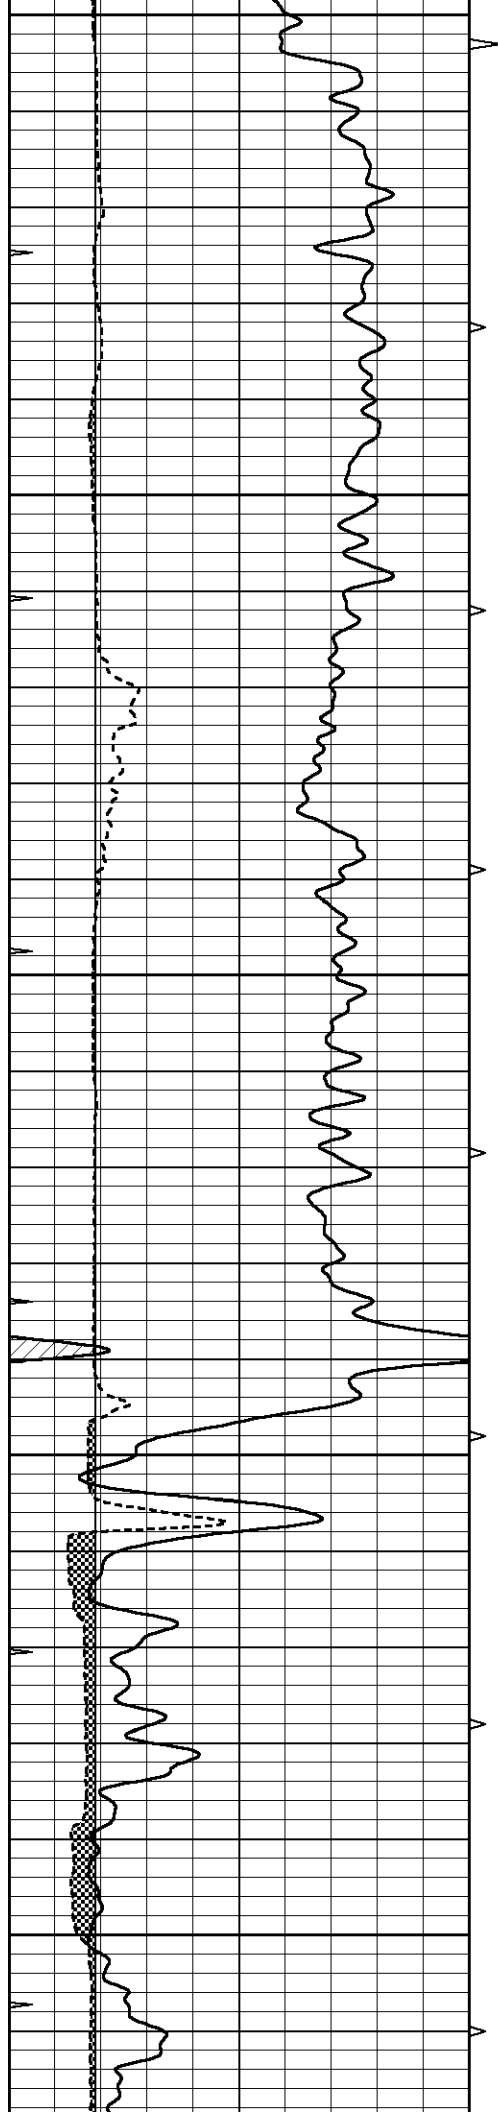

2900
2950
3000
3050
3100

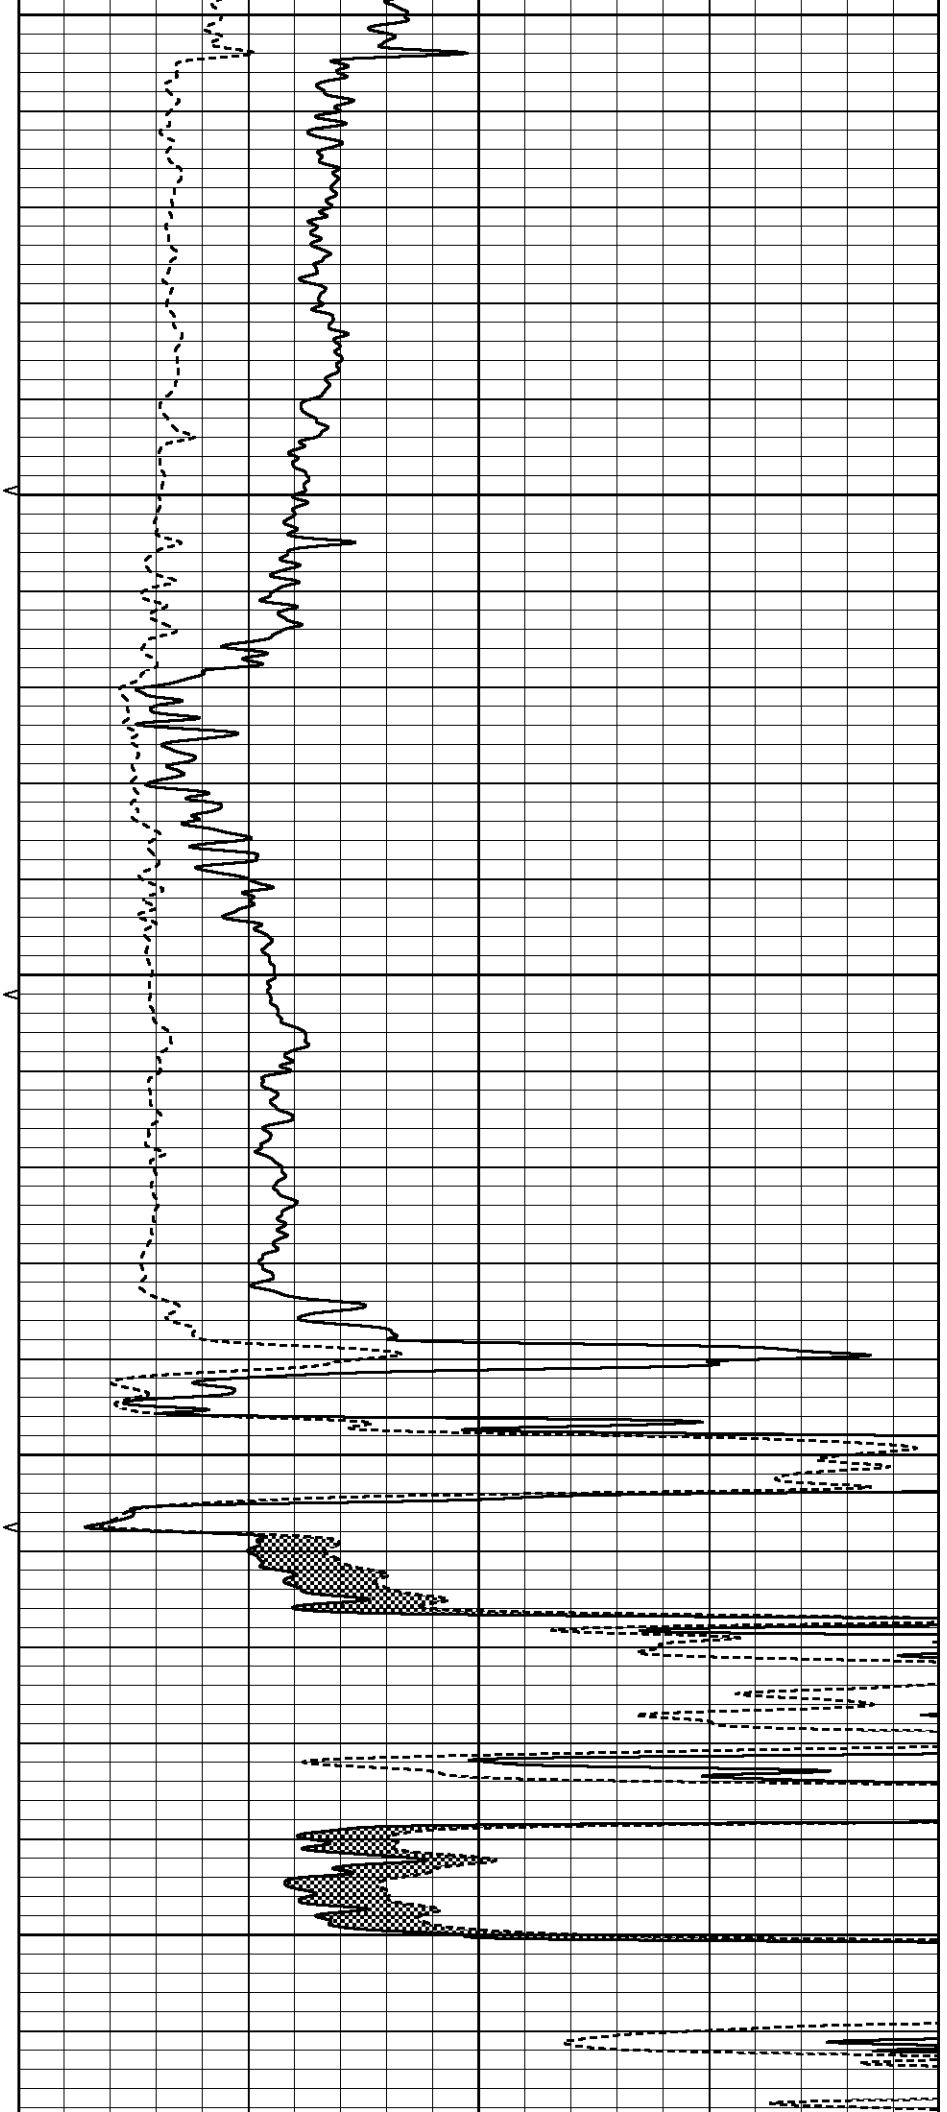

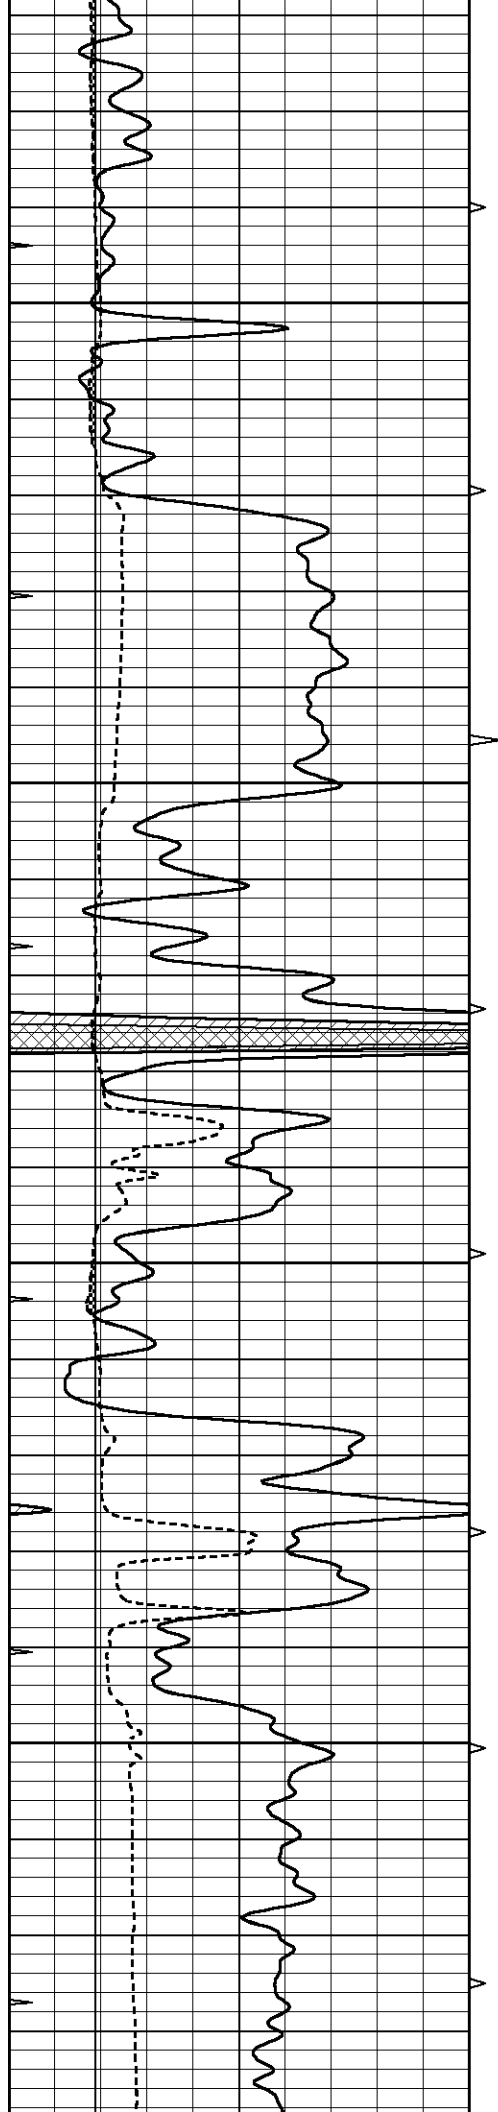



3150

3200

3250

3300

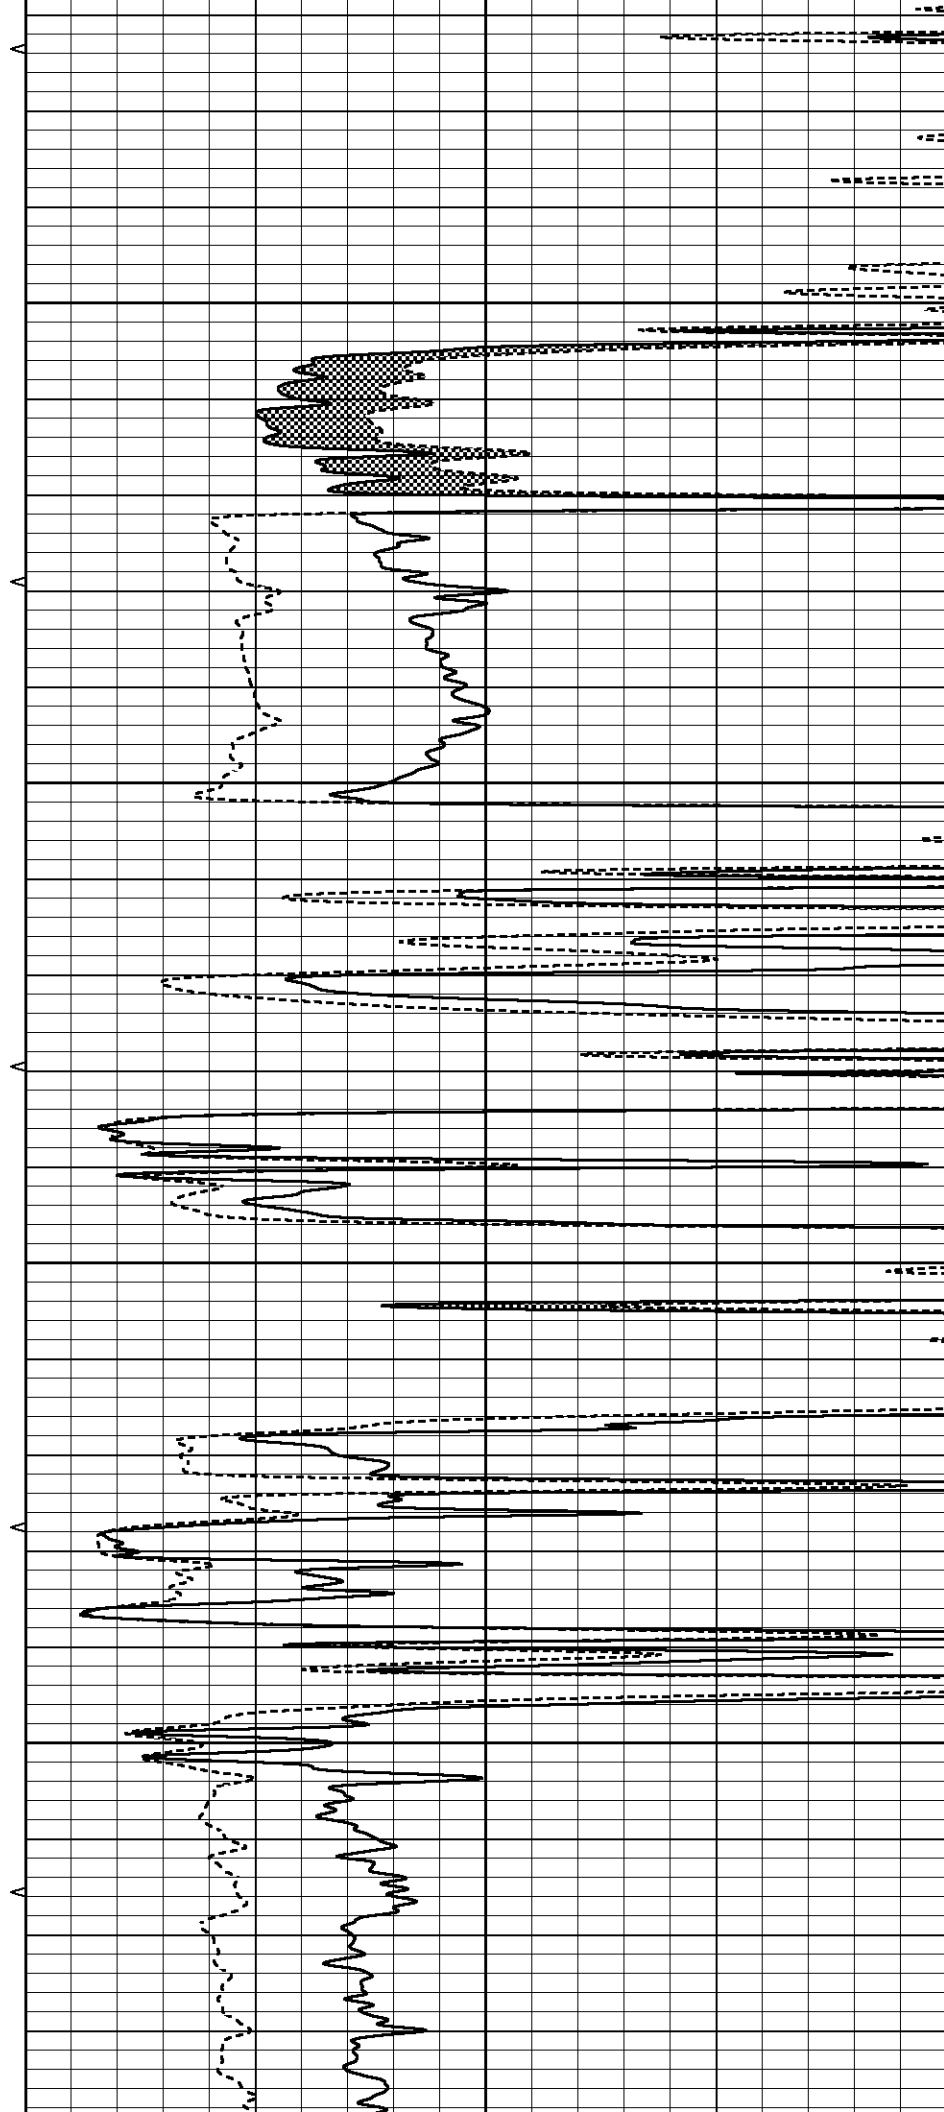

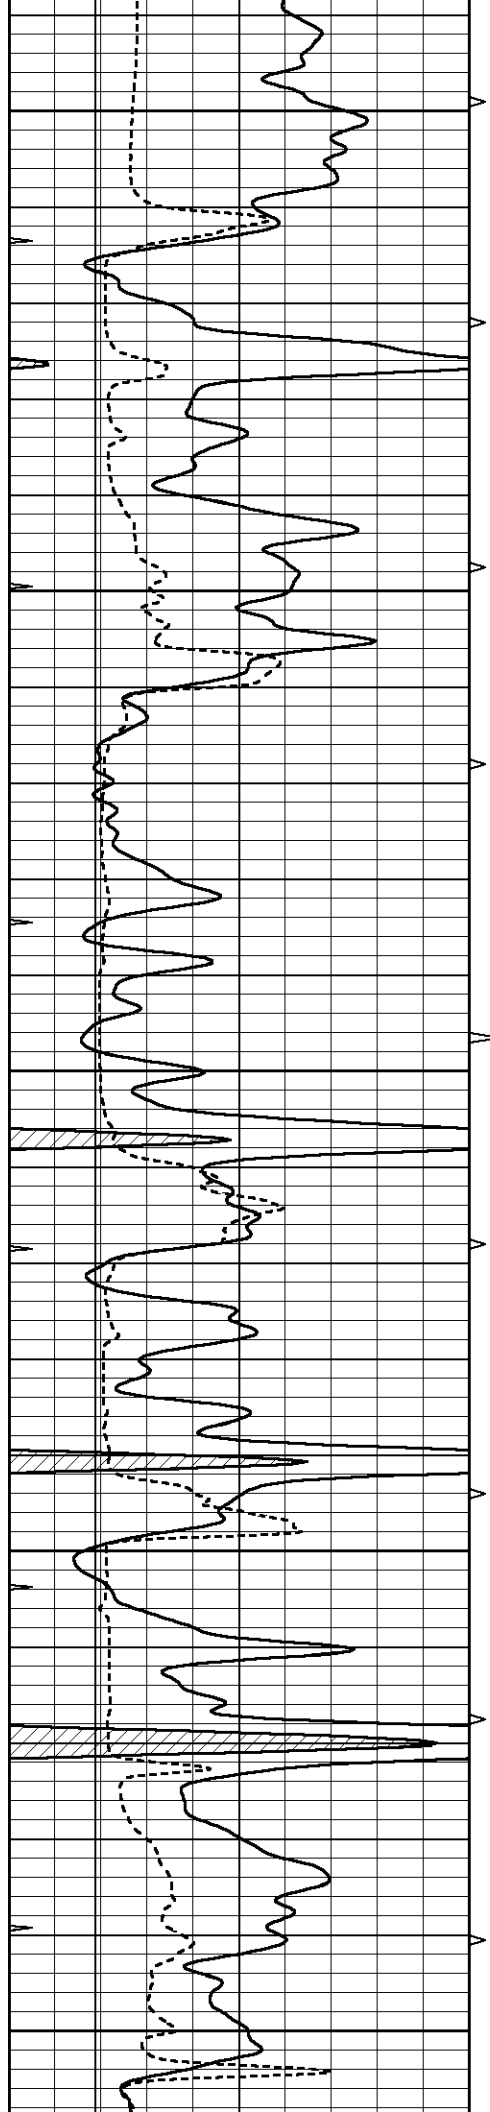


3350


3400

3450

3500

3550

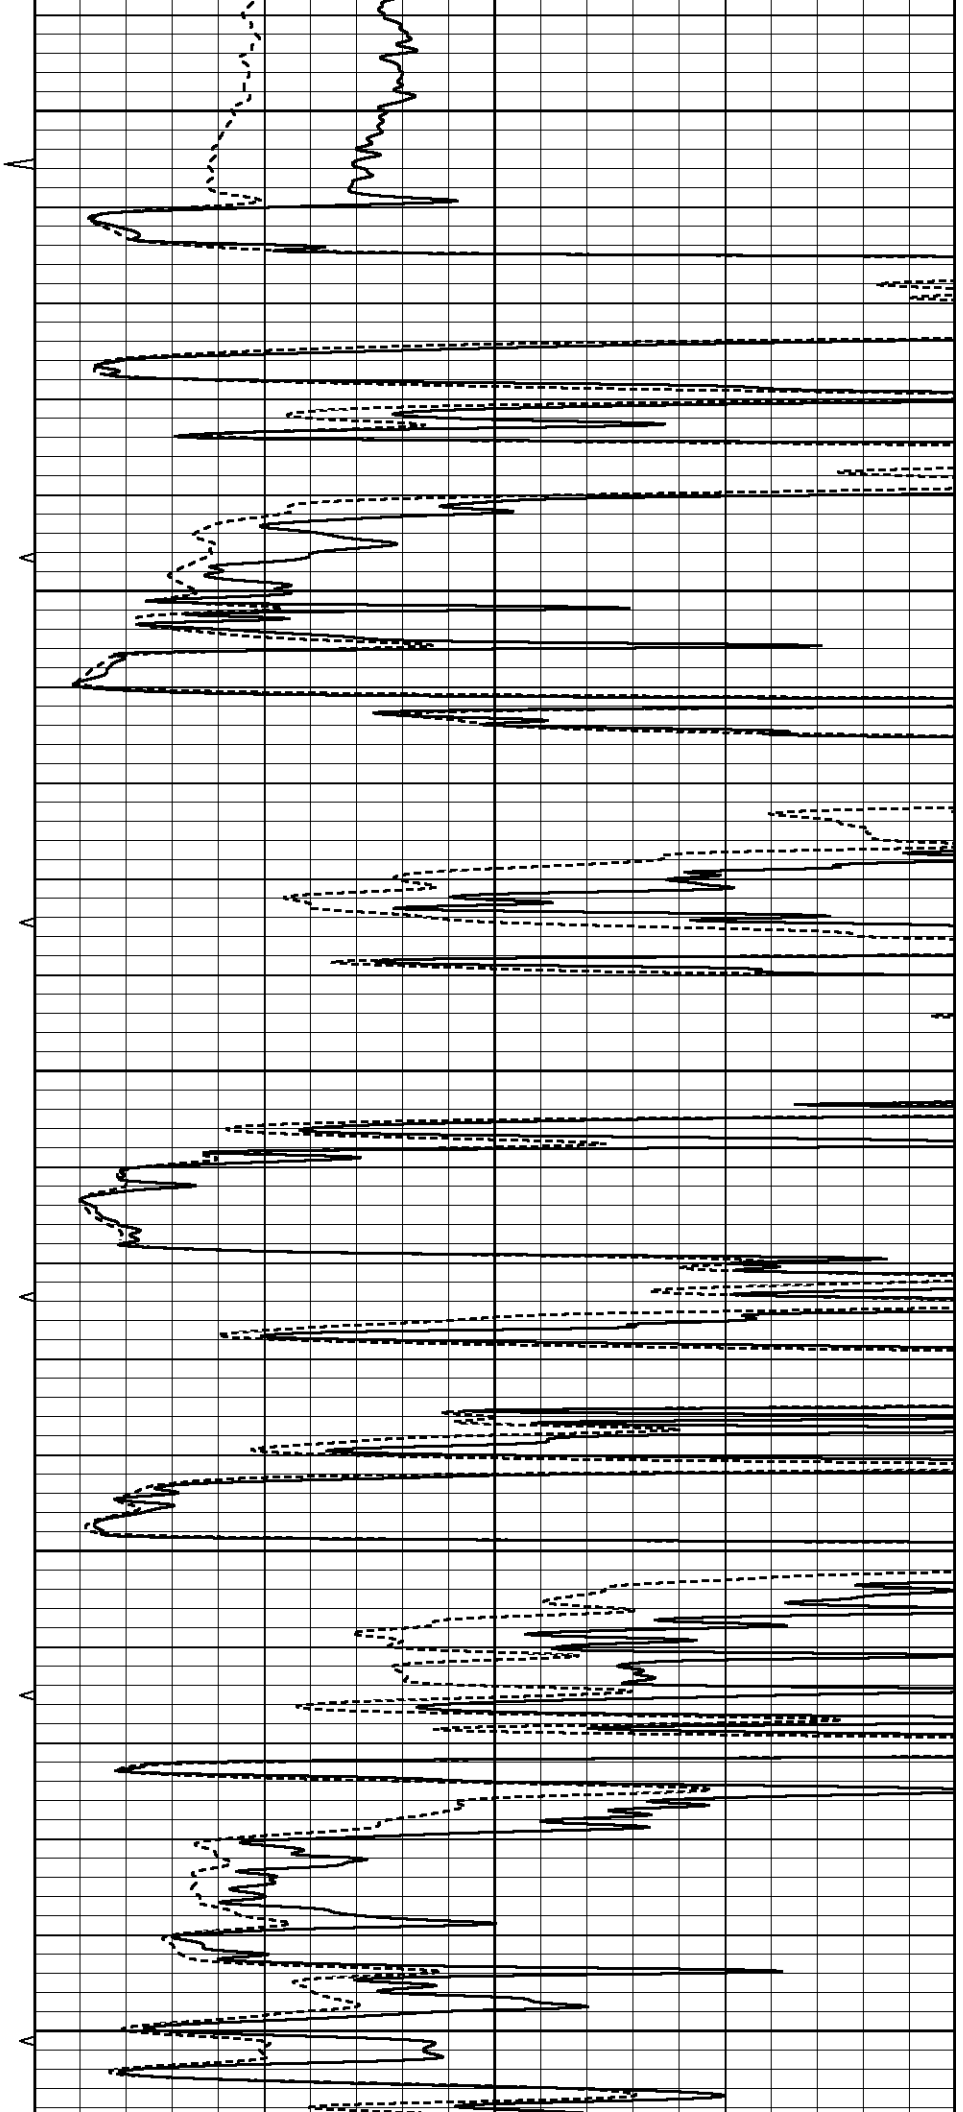

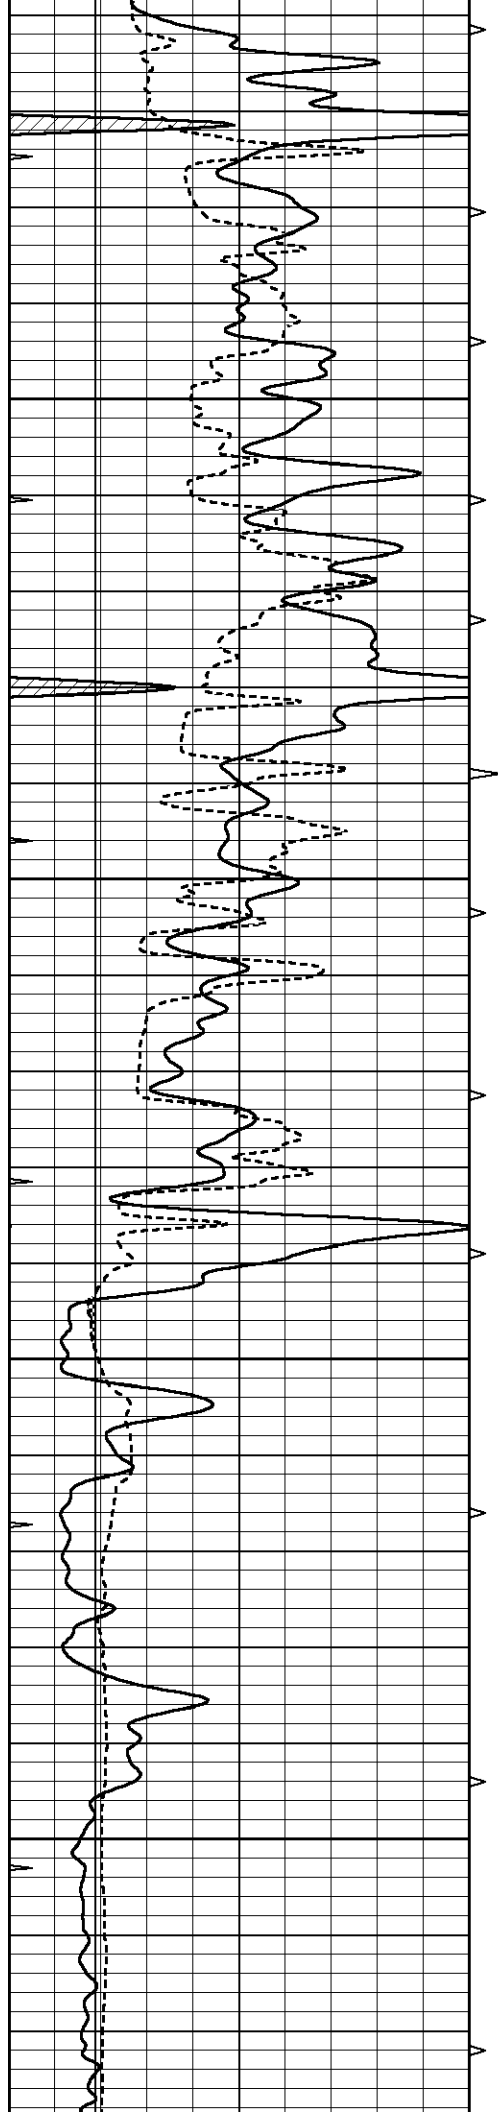



3600


3650

3700

3750

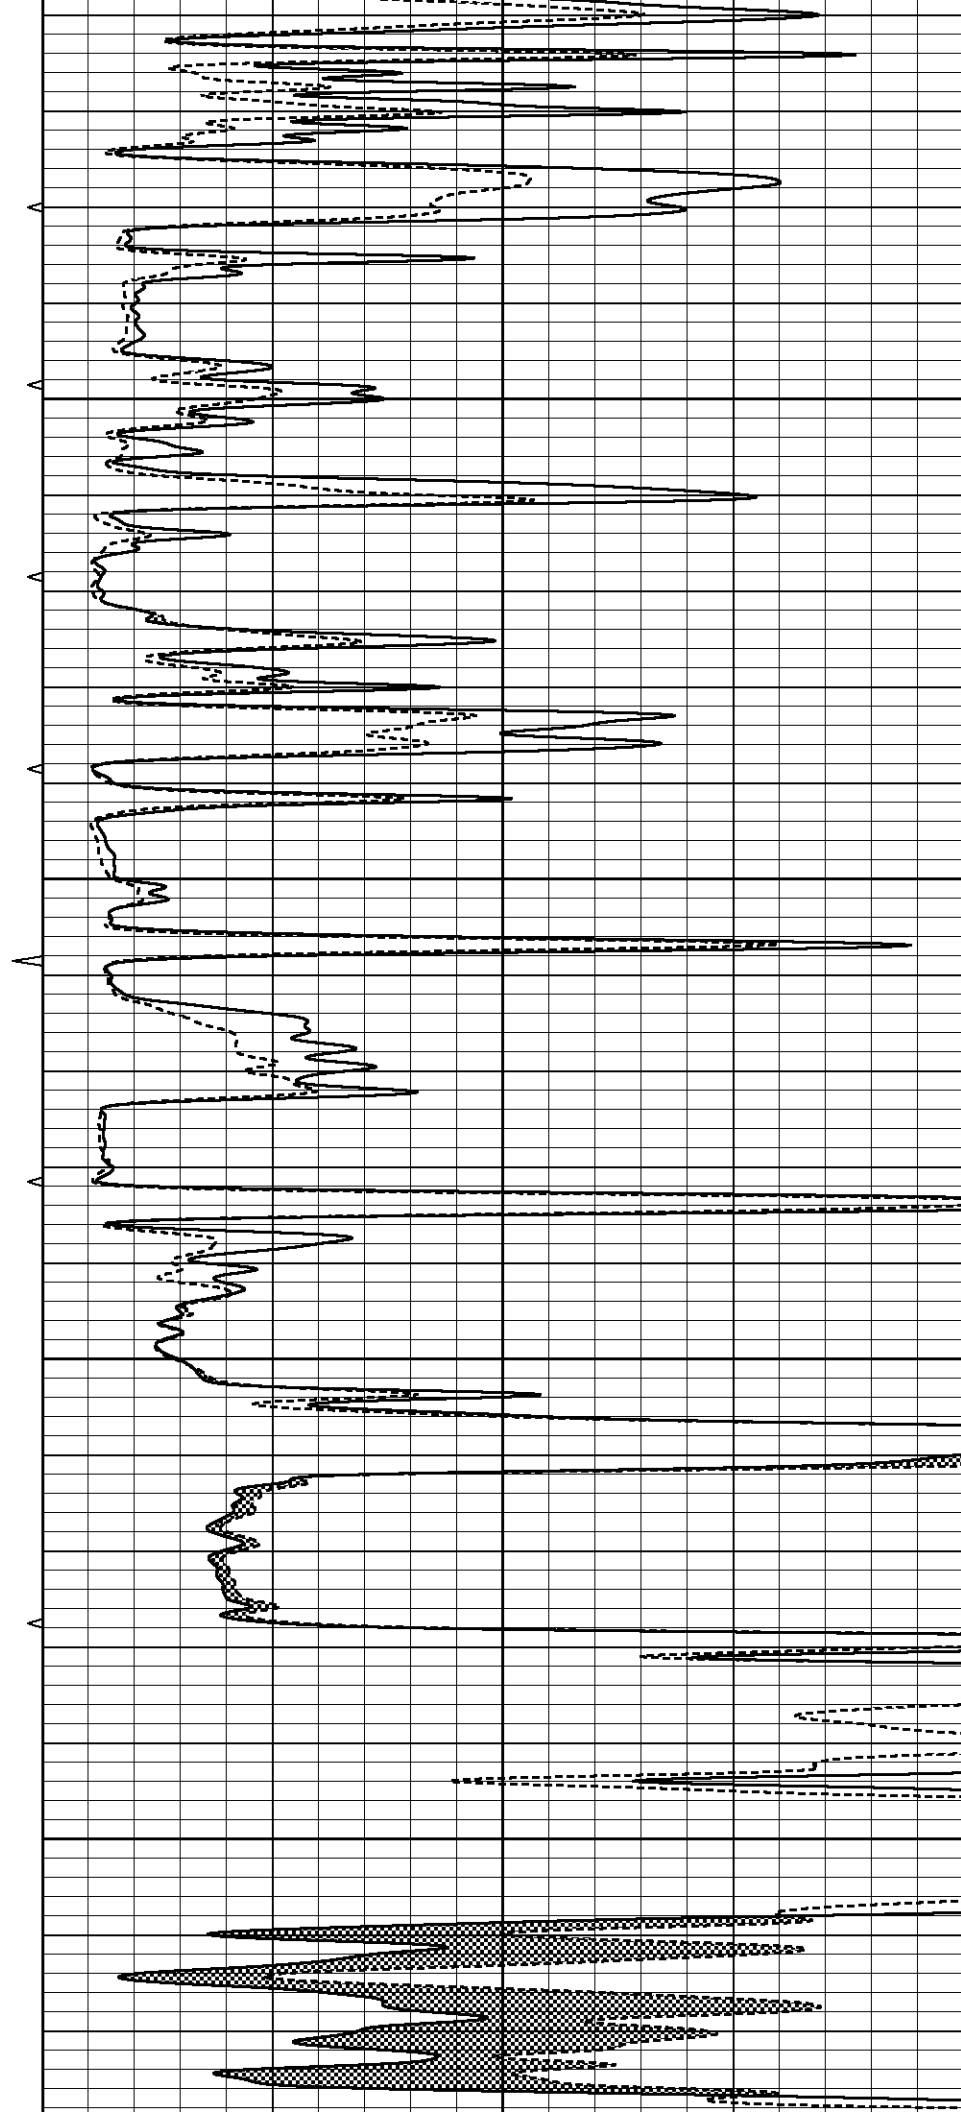

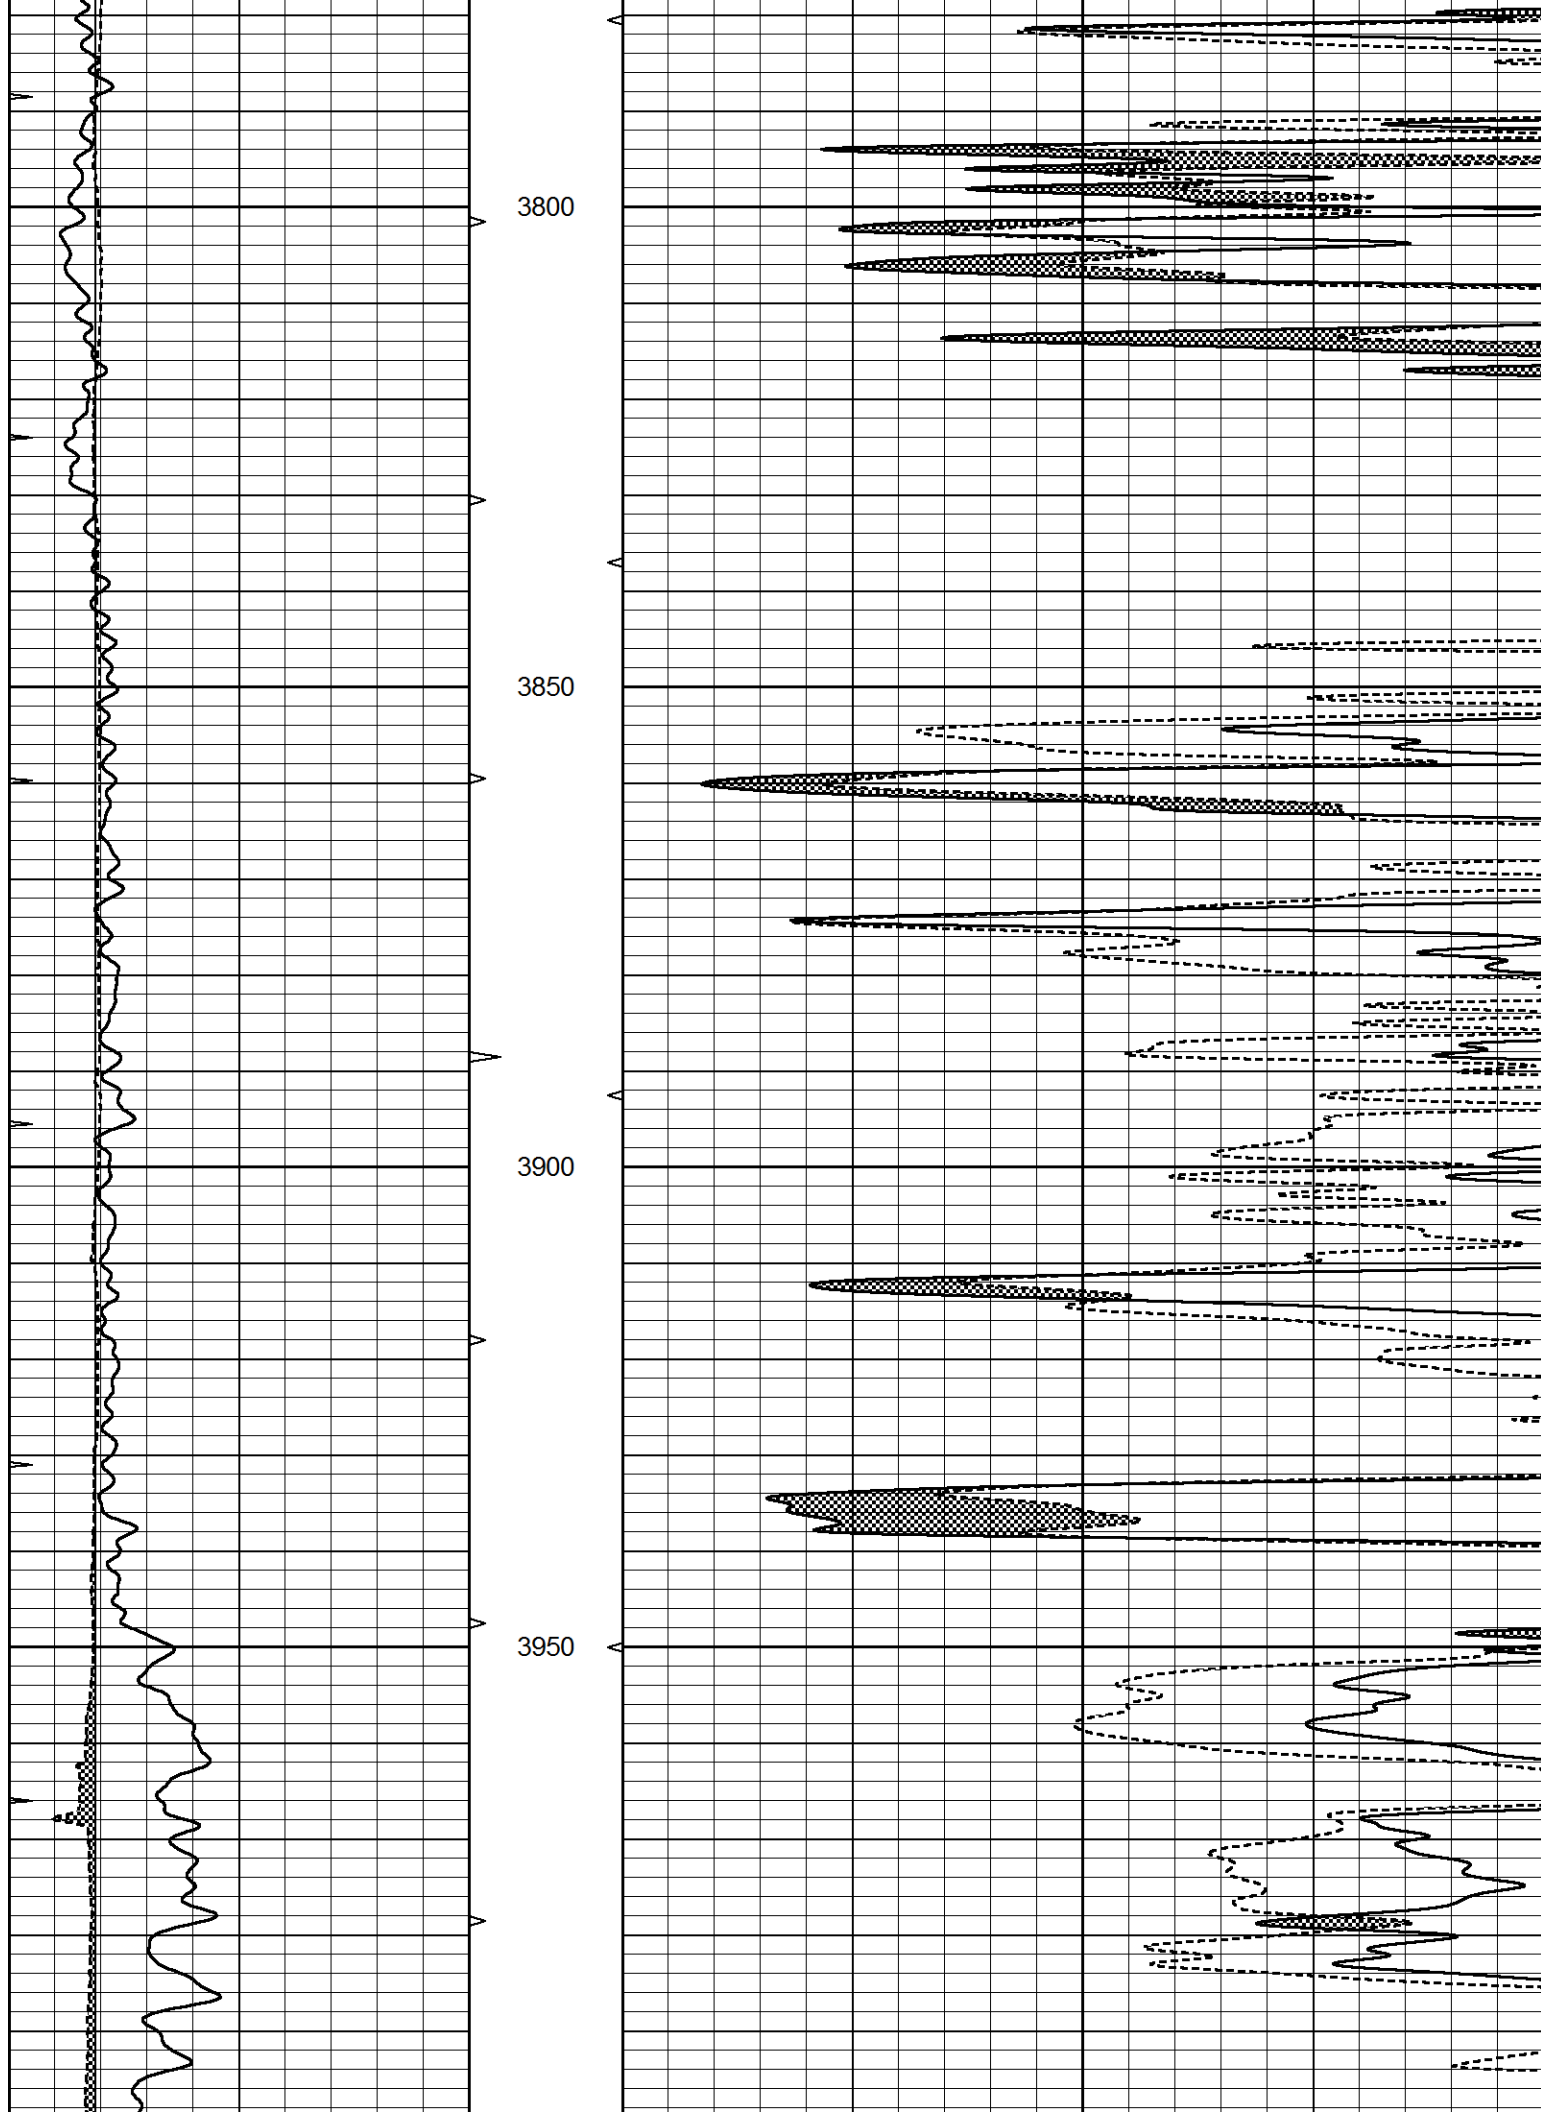


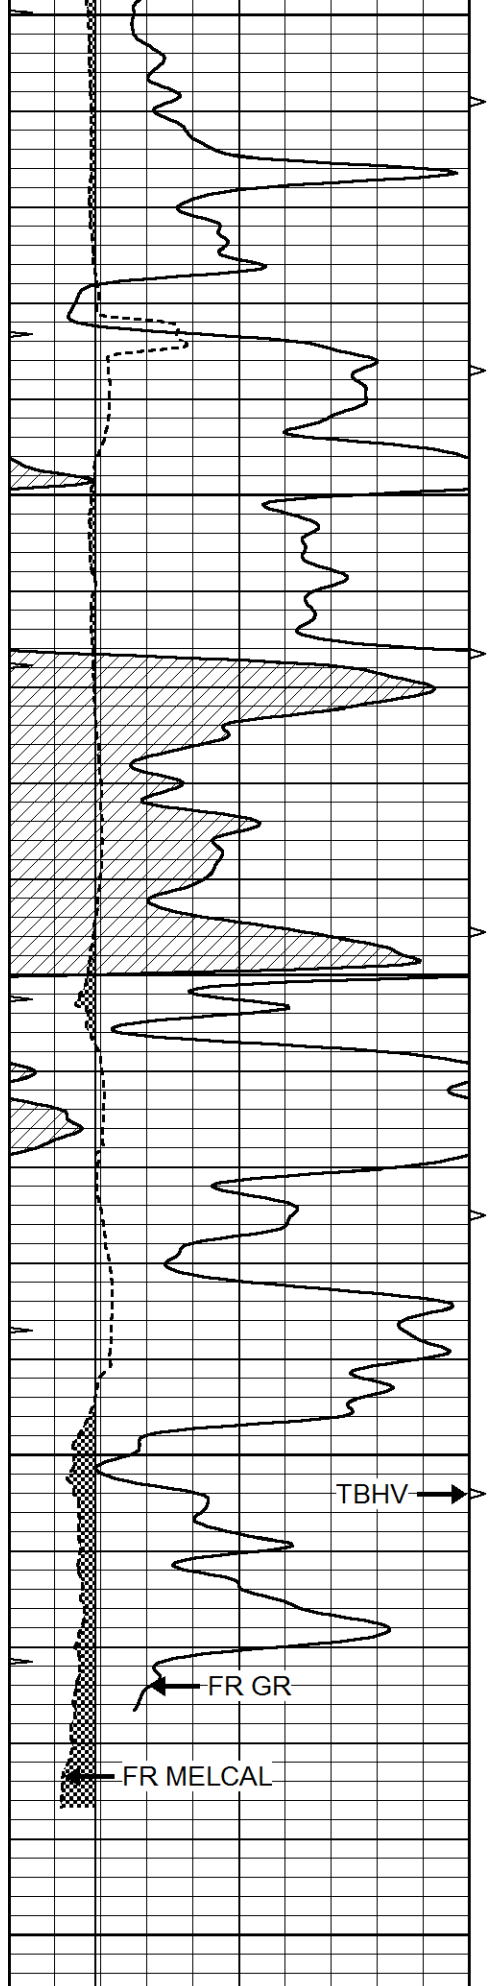

4000
4050
4100
4150
4200

0	GAMMA RAY (GAPI)	150
6	CALIPER (in)	16
0	MINMK	20

ABHV
10 (ft3)
0 0
TBHV

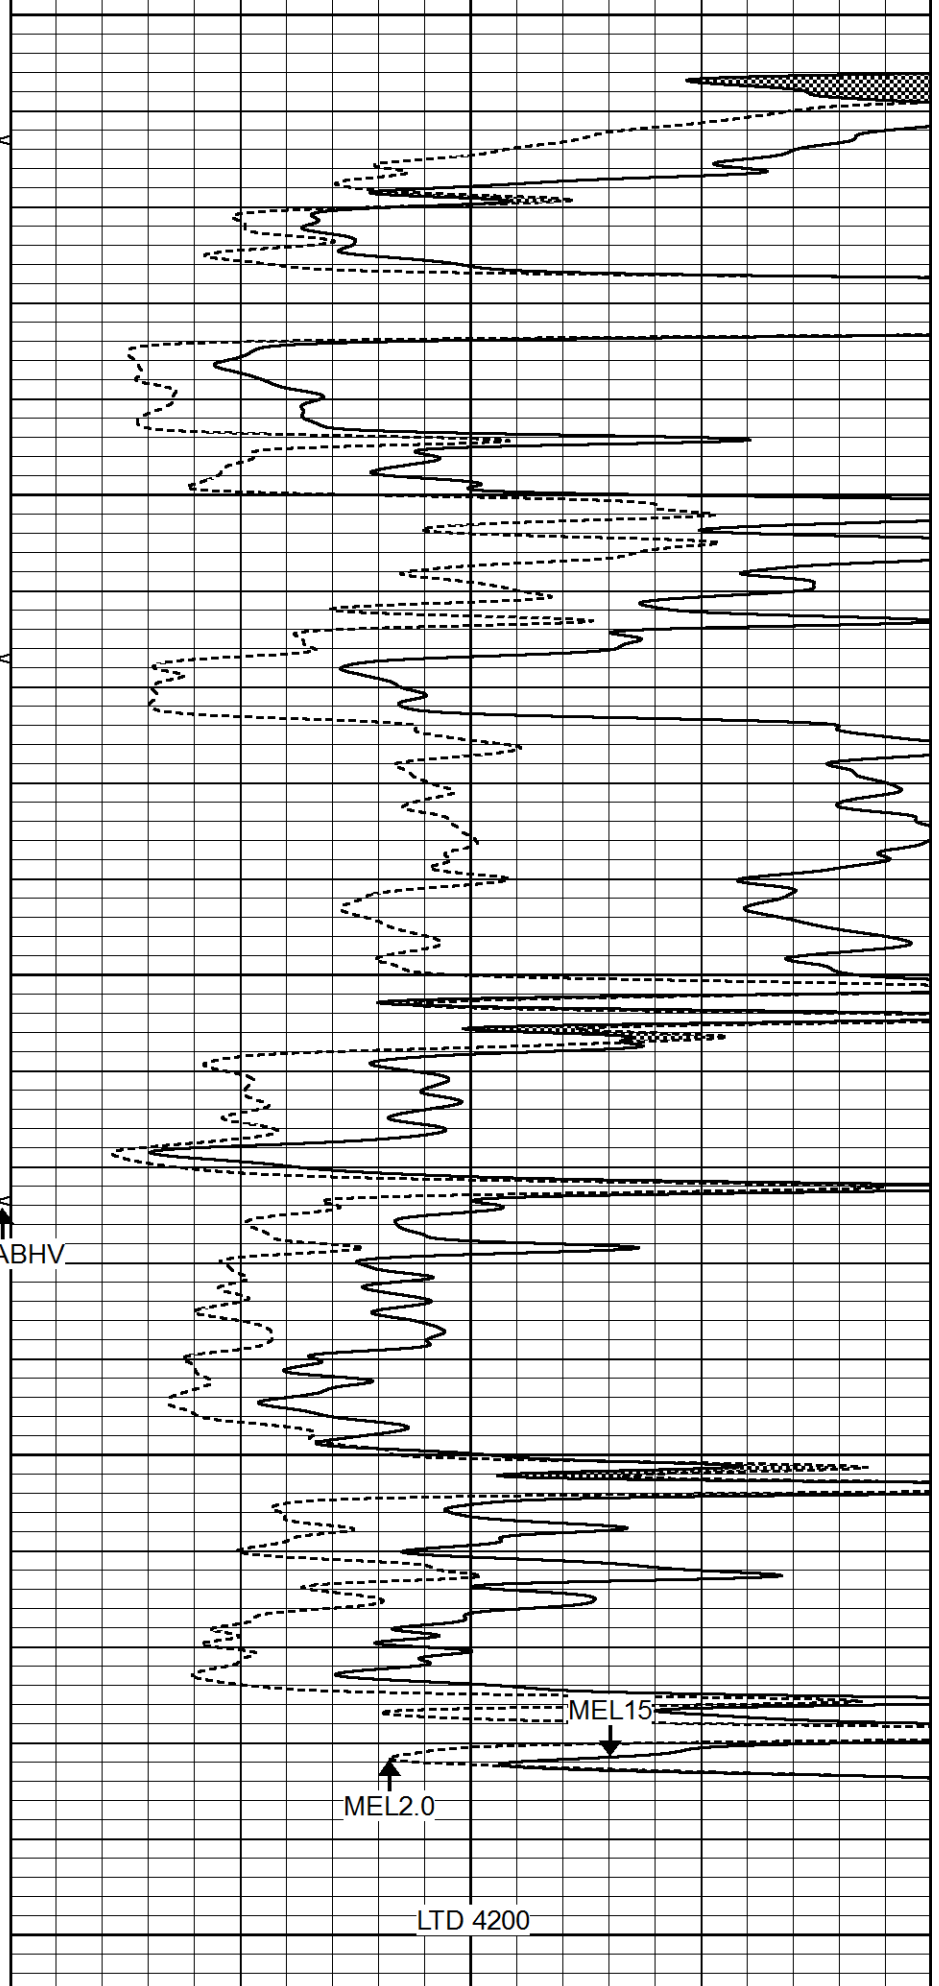


0	MEL1.5 (Ohm-m)	40
0	MEL2.0 (Ohm-m)	40
	LTD 4200	





REPEAT SECTION

Database File 6574pe.db
 Dataset Pathname pass5.1R
 Presentation Format _micro
 Dataset Creation Tue Jun 28 17:31:25 2022
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3) 10			

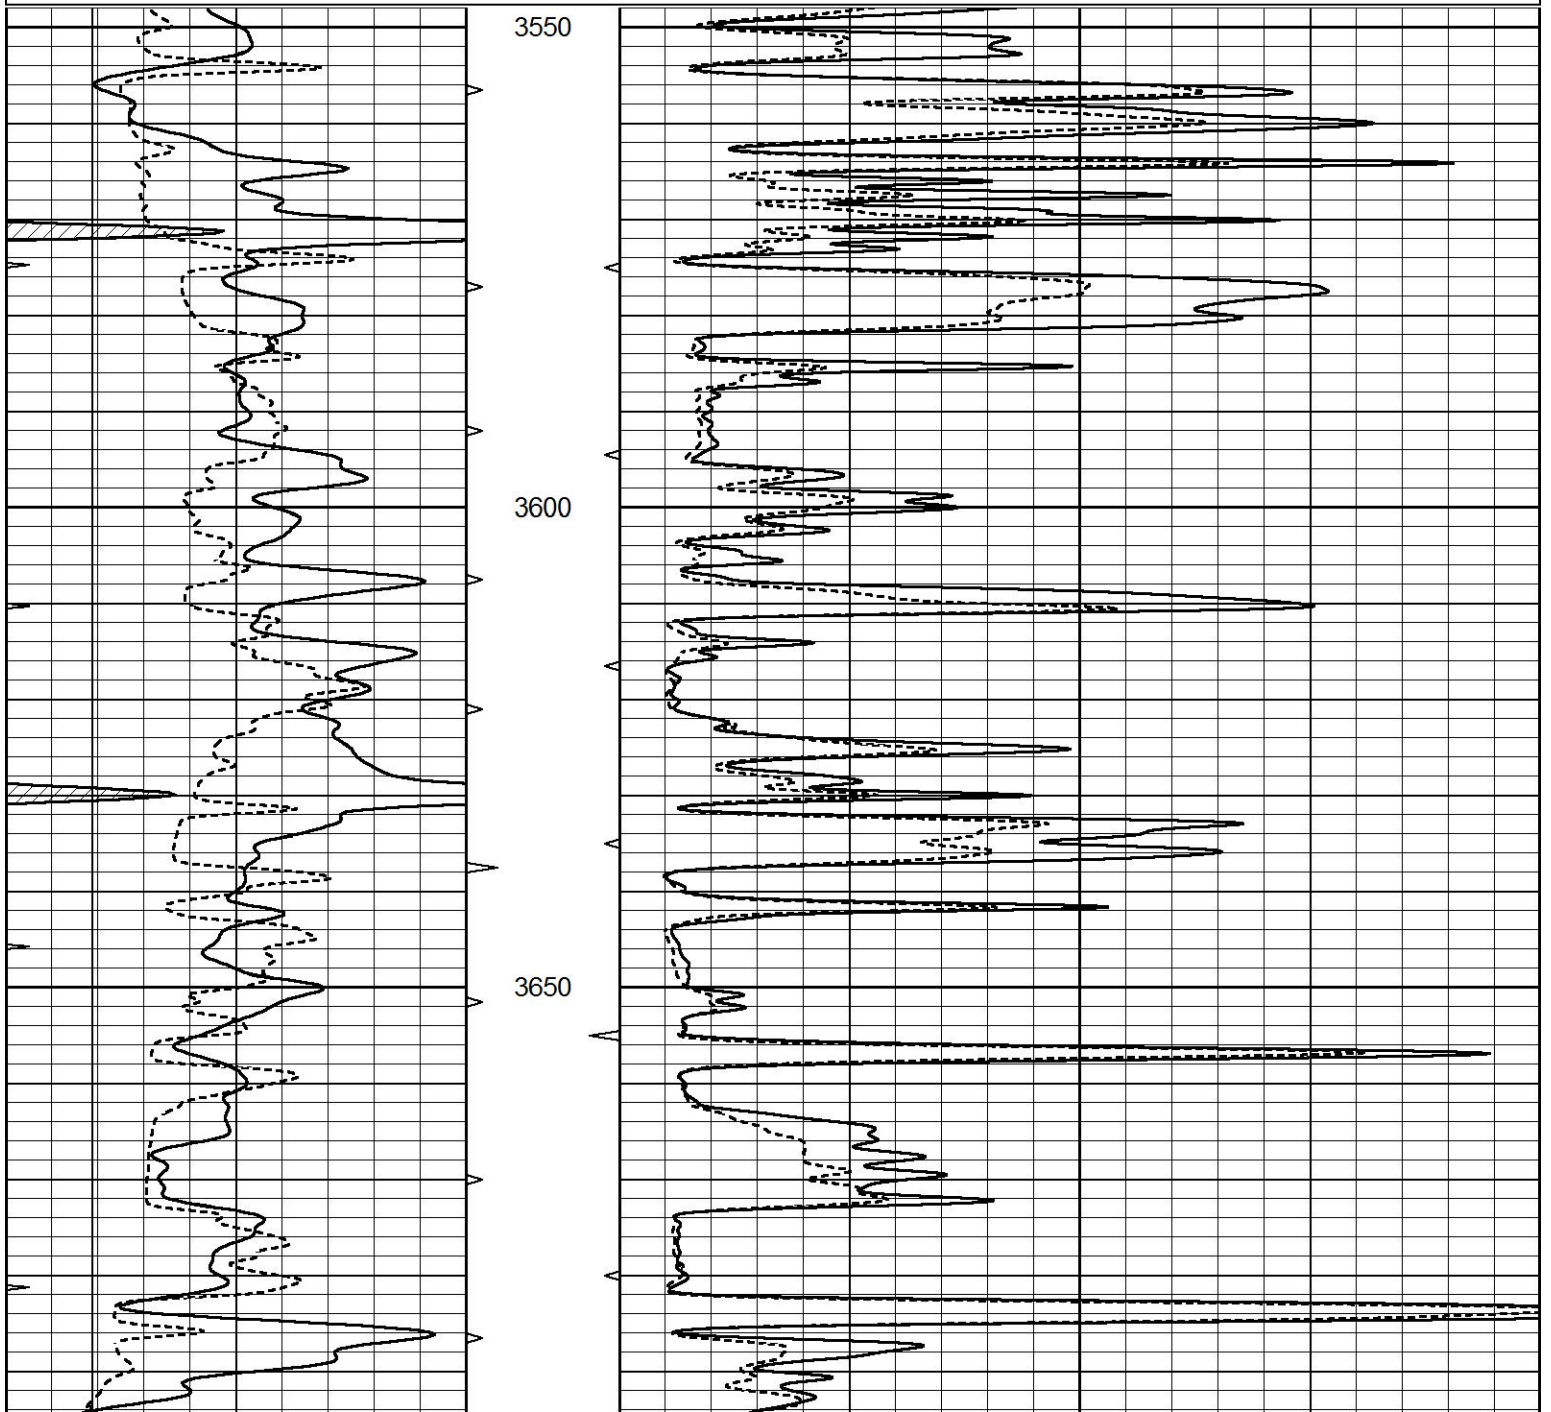

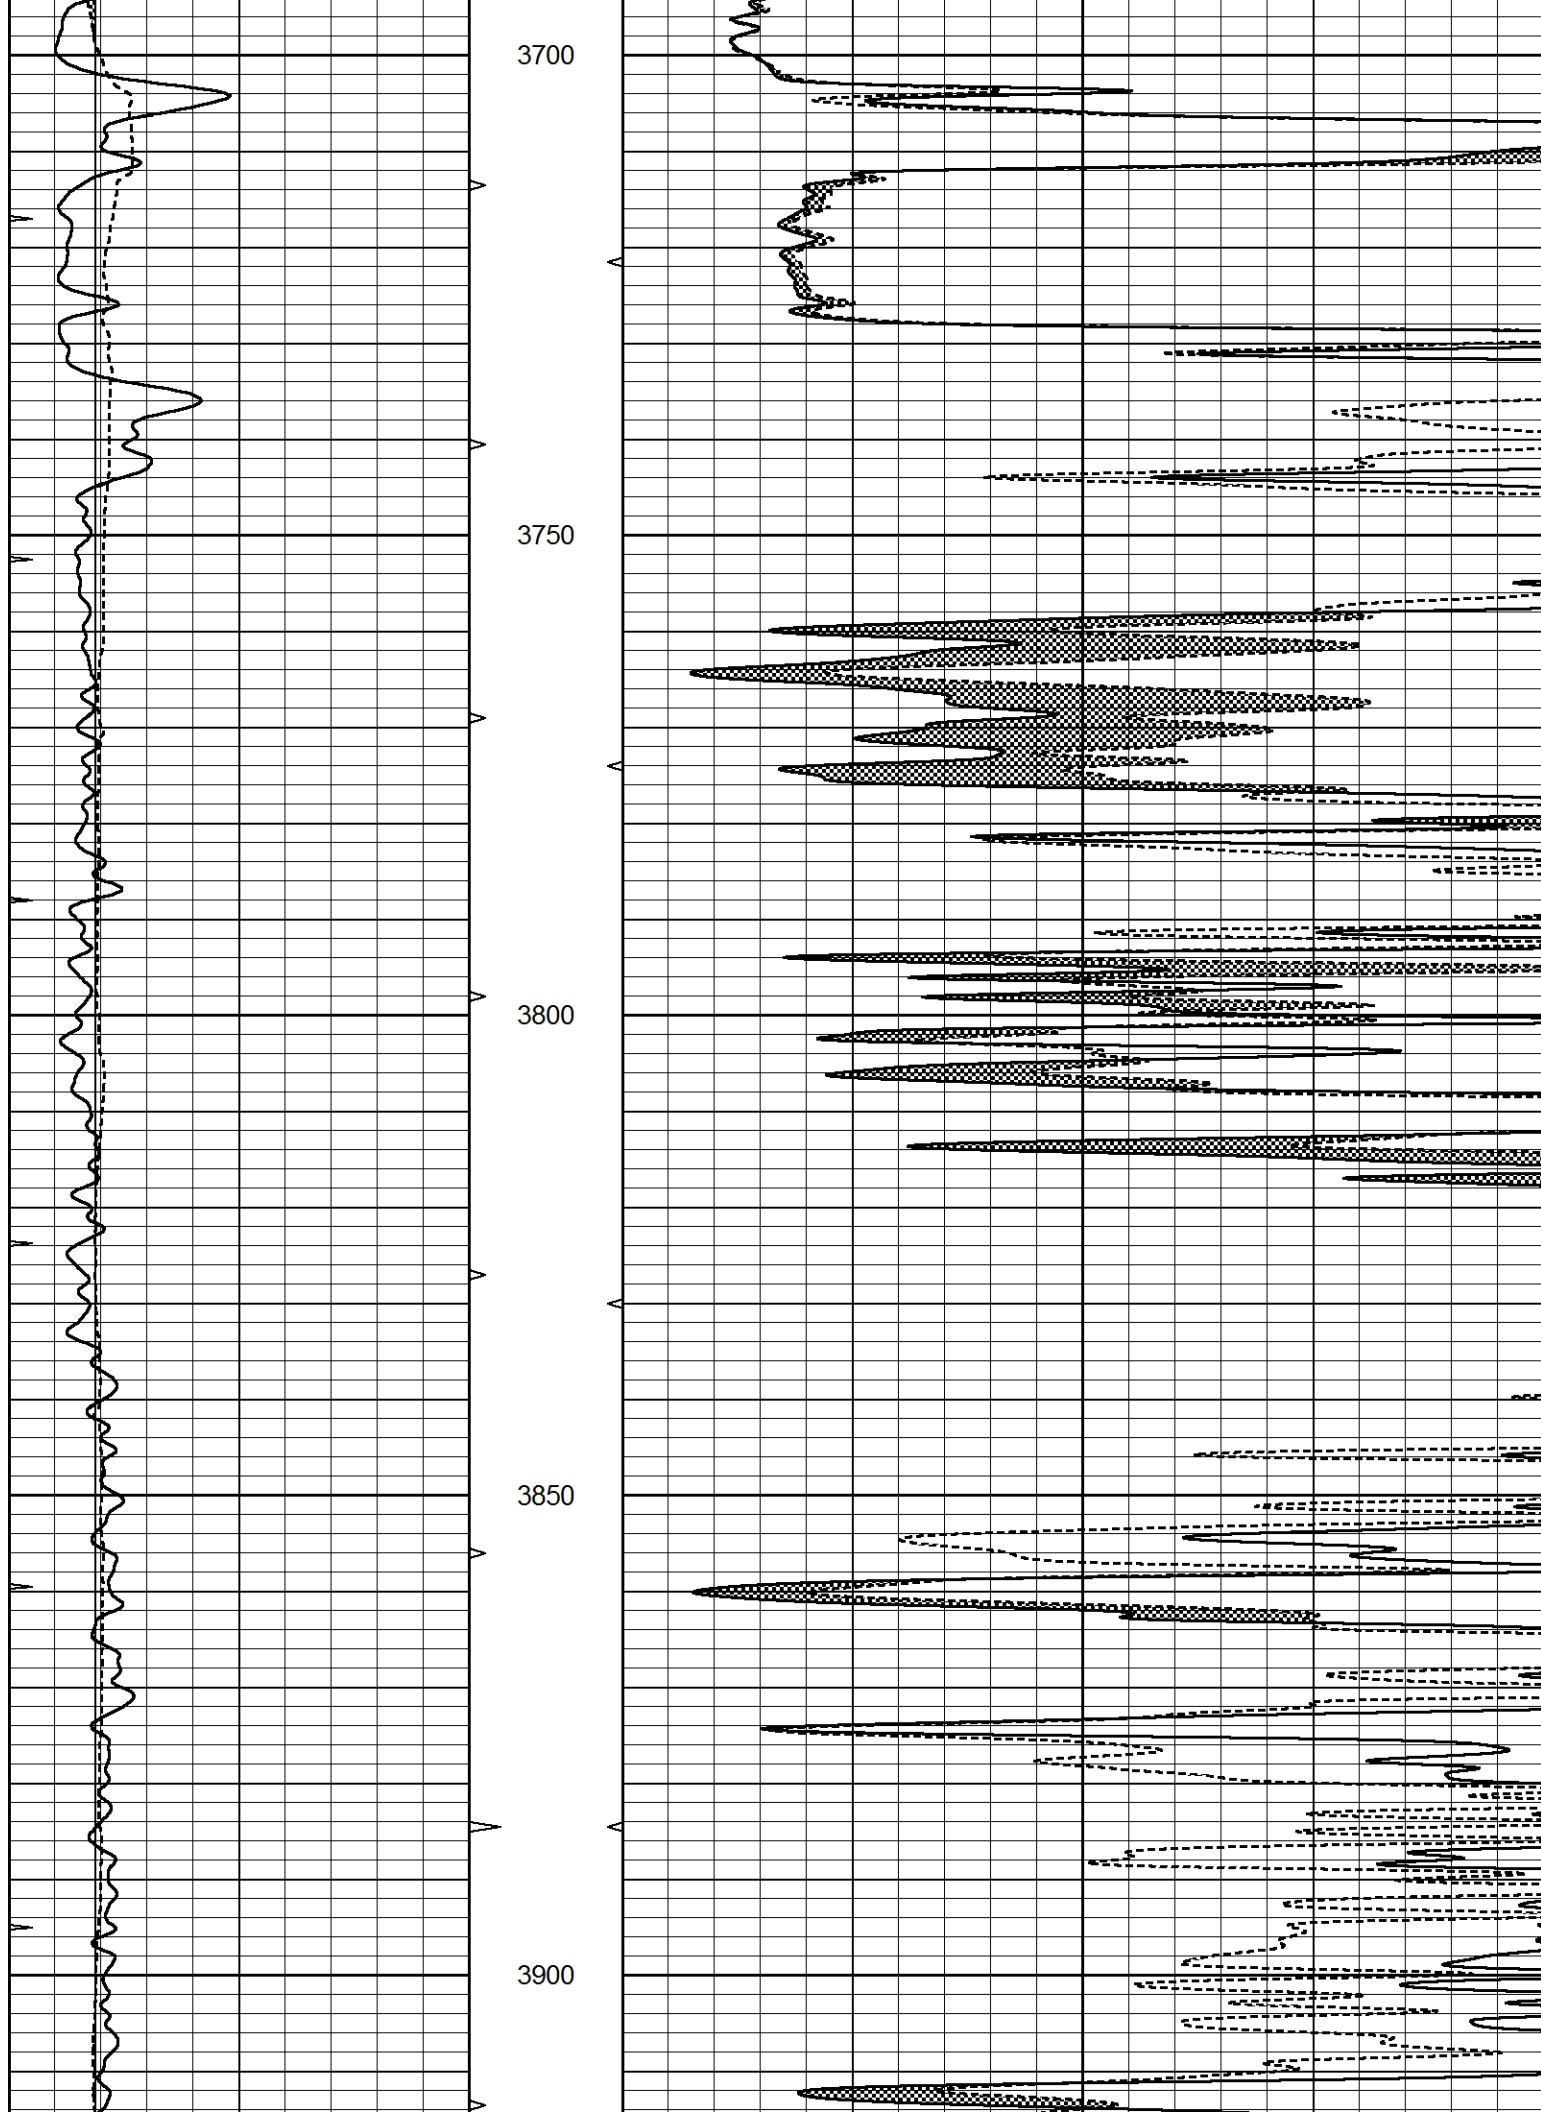

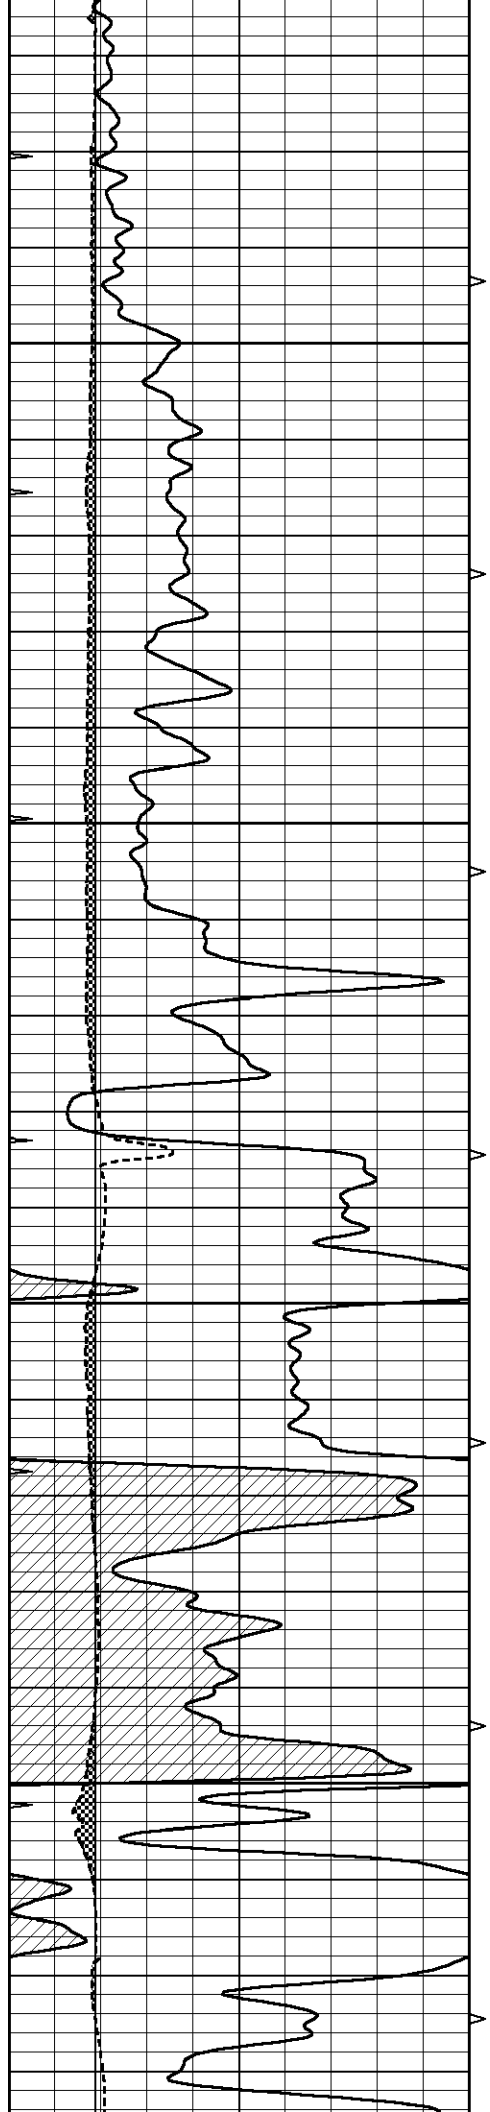



3950

4000

4050

4100

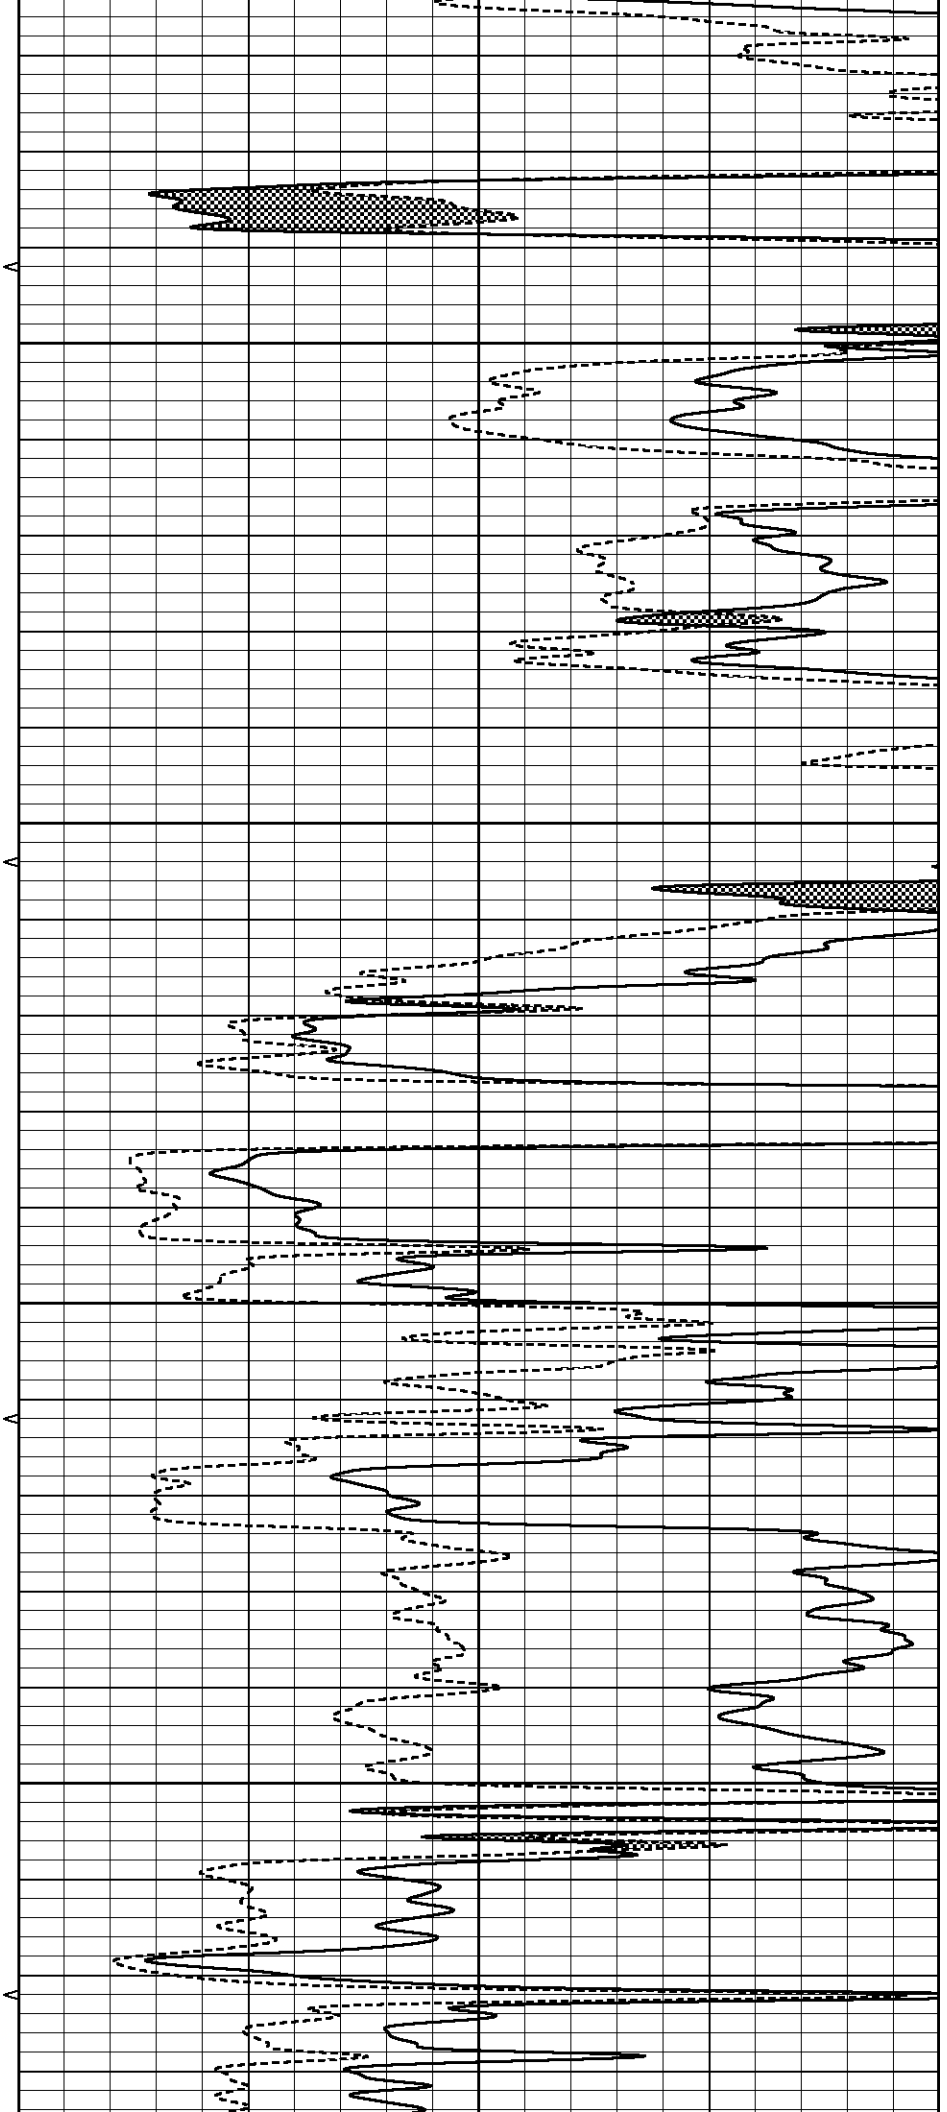

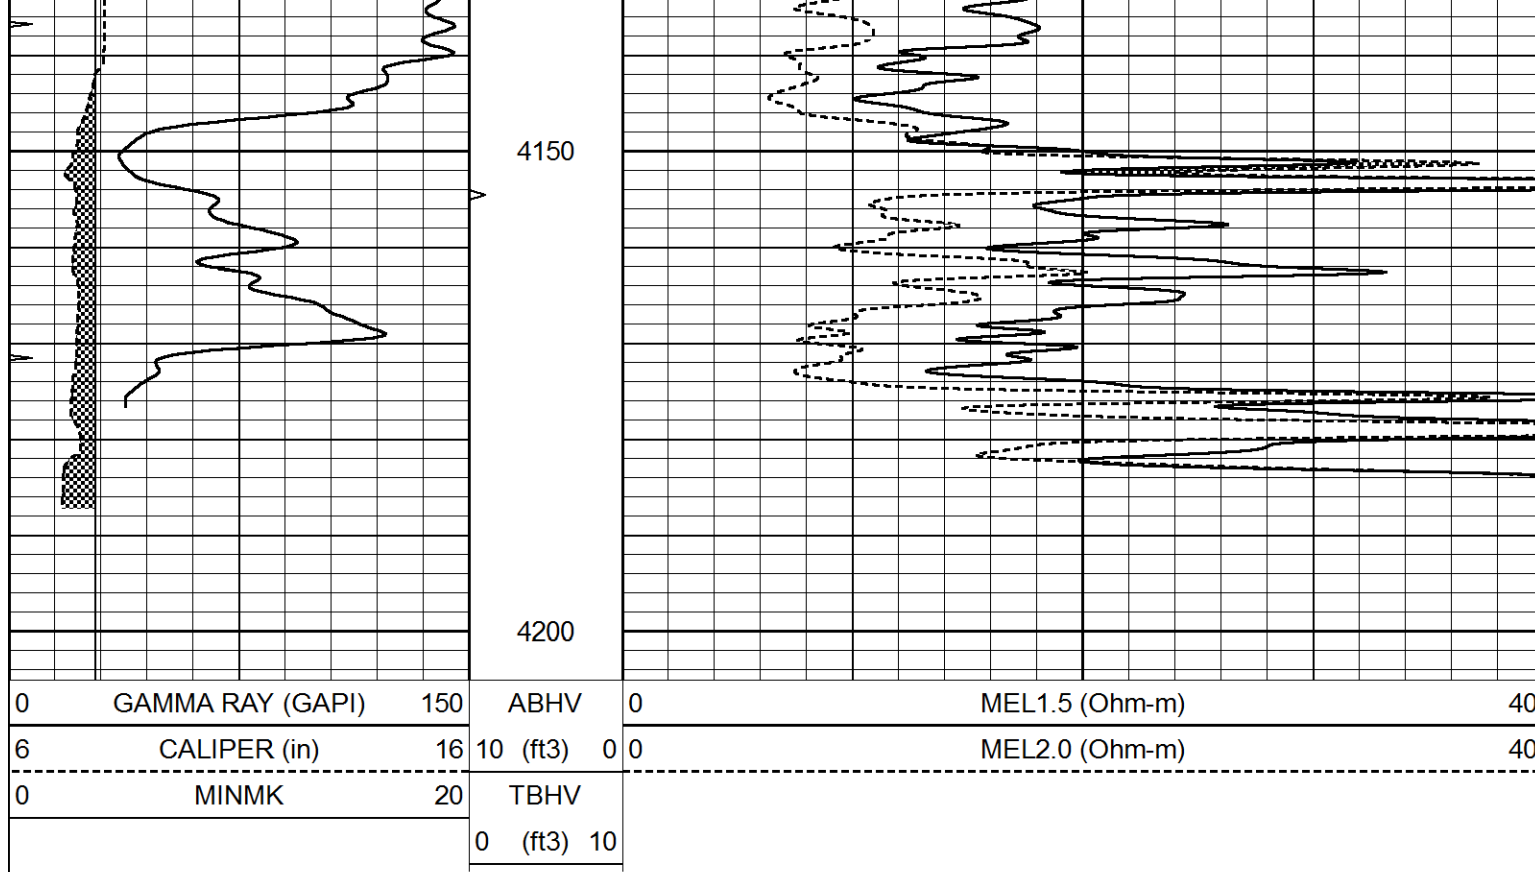

Calibration Report			
Database File	6574pe.db		
Dataset Pathname	pass6.4		
Dataset Creation	Tue Jun 28 17:55:09 2022		
MICRO Calibration Report			
Serial Number:	MICRO6		
Tool Model:	PROBE		
Performed:	Tue Jun 28 16:34:57 2022		
Caliper Calibration:	Gain=4.706	Offset=1.882	
References	Low Cal	High Cal	
Readings	8.000	16.000	
	1.300	3.000	
1.5" Calibration:	Gain=45.000	Offset=0.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.002	0.624	
2" Calibration:	Gain=45.000	Offset=0.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.006	0.468	

Gamma Ray Calibration Report		
Serial Number:	GR5	
Tool Model:	OPEN	
Performed:	Sat Jun 25 19:04:48 2022	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps

Calibrator Reading:

1.0

cps

Sensitivity:

0.5800

GAPI/cps