MICRO LOG

Company MULL DRILLING COMPANY, INC.
Well BBT #1-25
Field WHITNEY
County GOVE
State KANSAS

Company MULL DRILLING COMPANY, INC.
Well BBT #1-25
Field WHITNEY
County GOVE State KANSAS

Location: API # : 15-063-22414-0000
1192' FNL & 727' FWL
SW - SE - NW - NW
SEC 25 TWP 15S RGE 27W

Other Services
CDL/CNL/PE
DIL/SON

Permanent Datum GROUND LEVEL Elevation 2451
Log Measured From KELLY BUSHING 7' A.G.L
Drilling Measured From KELLY BUSHING

Elevation
K.B. 2458
D.F. 2456
G.L. 2451

Date	8/16/22			
Run Number	TWO			
Depth Driller	4455			
Depth Logger	4457			
Bottom Logged Interval	4441			
Top Log Interval	3600			
Casing Driller	8 5/8" @ 263			
Casing Logger	263			
Bit Size	7 7/8			
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 5800 PPM		
Density / Viscosity	9.2/54			
pH / Fluid Loss	10.0/6.0			
Source of Sample	FLOWLINE			
Rm @ Meas. Temp	1.00 @ 75F			
Rmf @ Meas. Temp	.750 @ 75F			
Rmc @ Meas. Temp	1.20 @ 75F			
Source of Rmf / Rmc	MEASUREMENT			
Rm @ BHT	.620 @ 121F			
Time Circulation Stopped	4 HOURS			
Time Logger on Bottom	5:00 P.M.			
Maximum Recorded Temperature	121F			
Equipment Number	3802			
Location	HAYS, KANSAS			
Recorded By	COLE ROBBEN			
Witnessed By	BLAKE MILLER			

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395


DIRECTIONS:
NORTH ON RED CHIEF ROAD FROM PENDENNIS, THEN EAST ON GOVE C ROAD 2 MILES
STRAIGHT ONTO LEASE ROAD, FOLLOW FOR 1.5 MILES TO LOCATION


MAIN SECTION


Database File	6771pe.db
Dataset Pathname	pass8MEL
Presentation Format	_micro
Dataset Creation	Tue Aug 16 18:54:08 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3) 10			

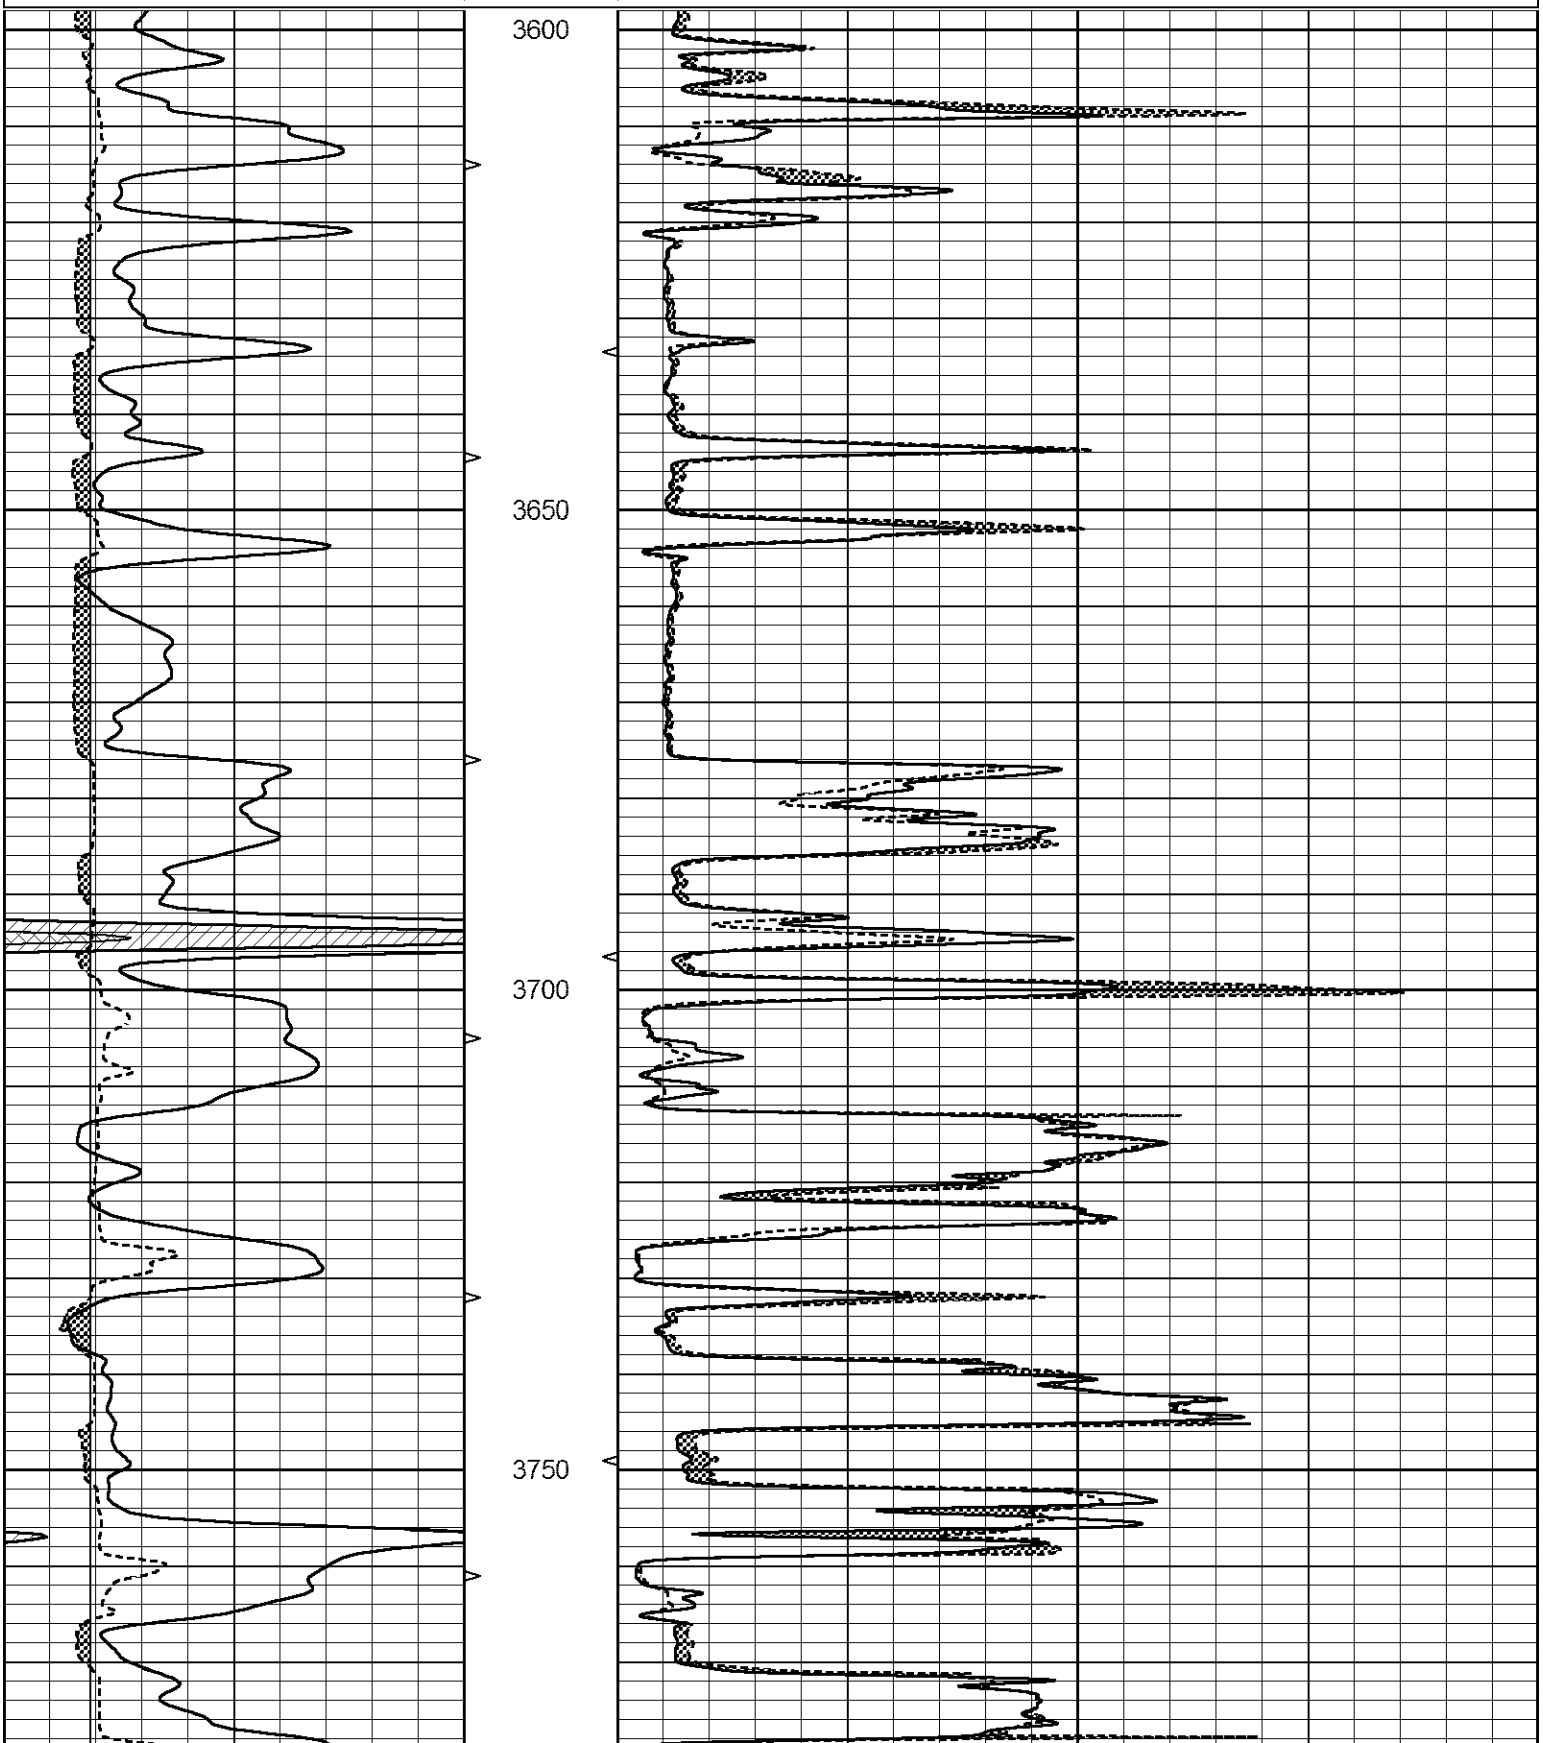

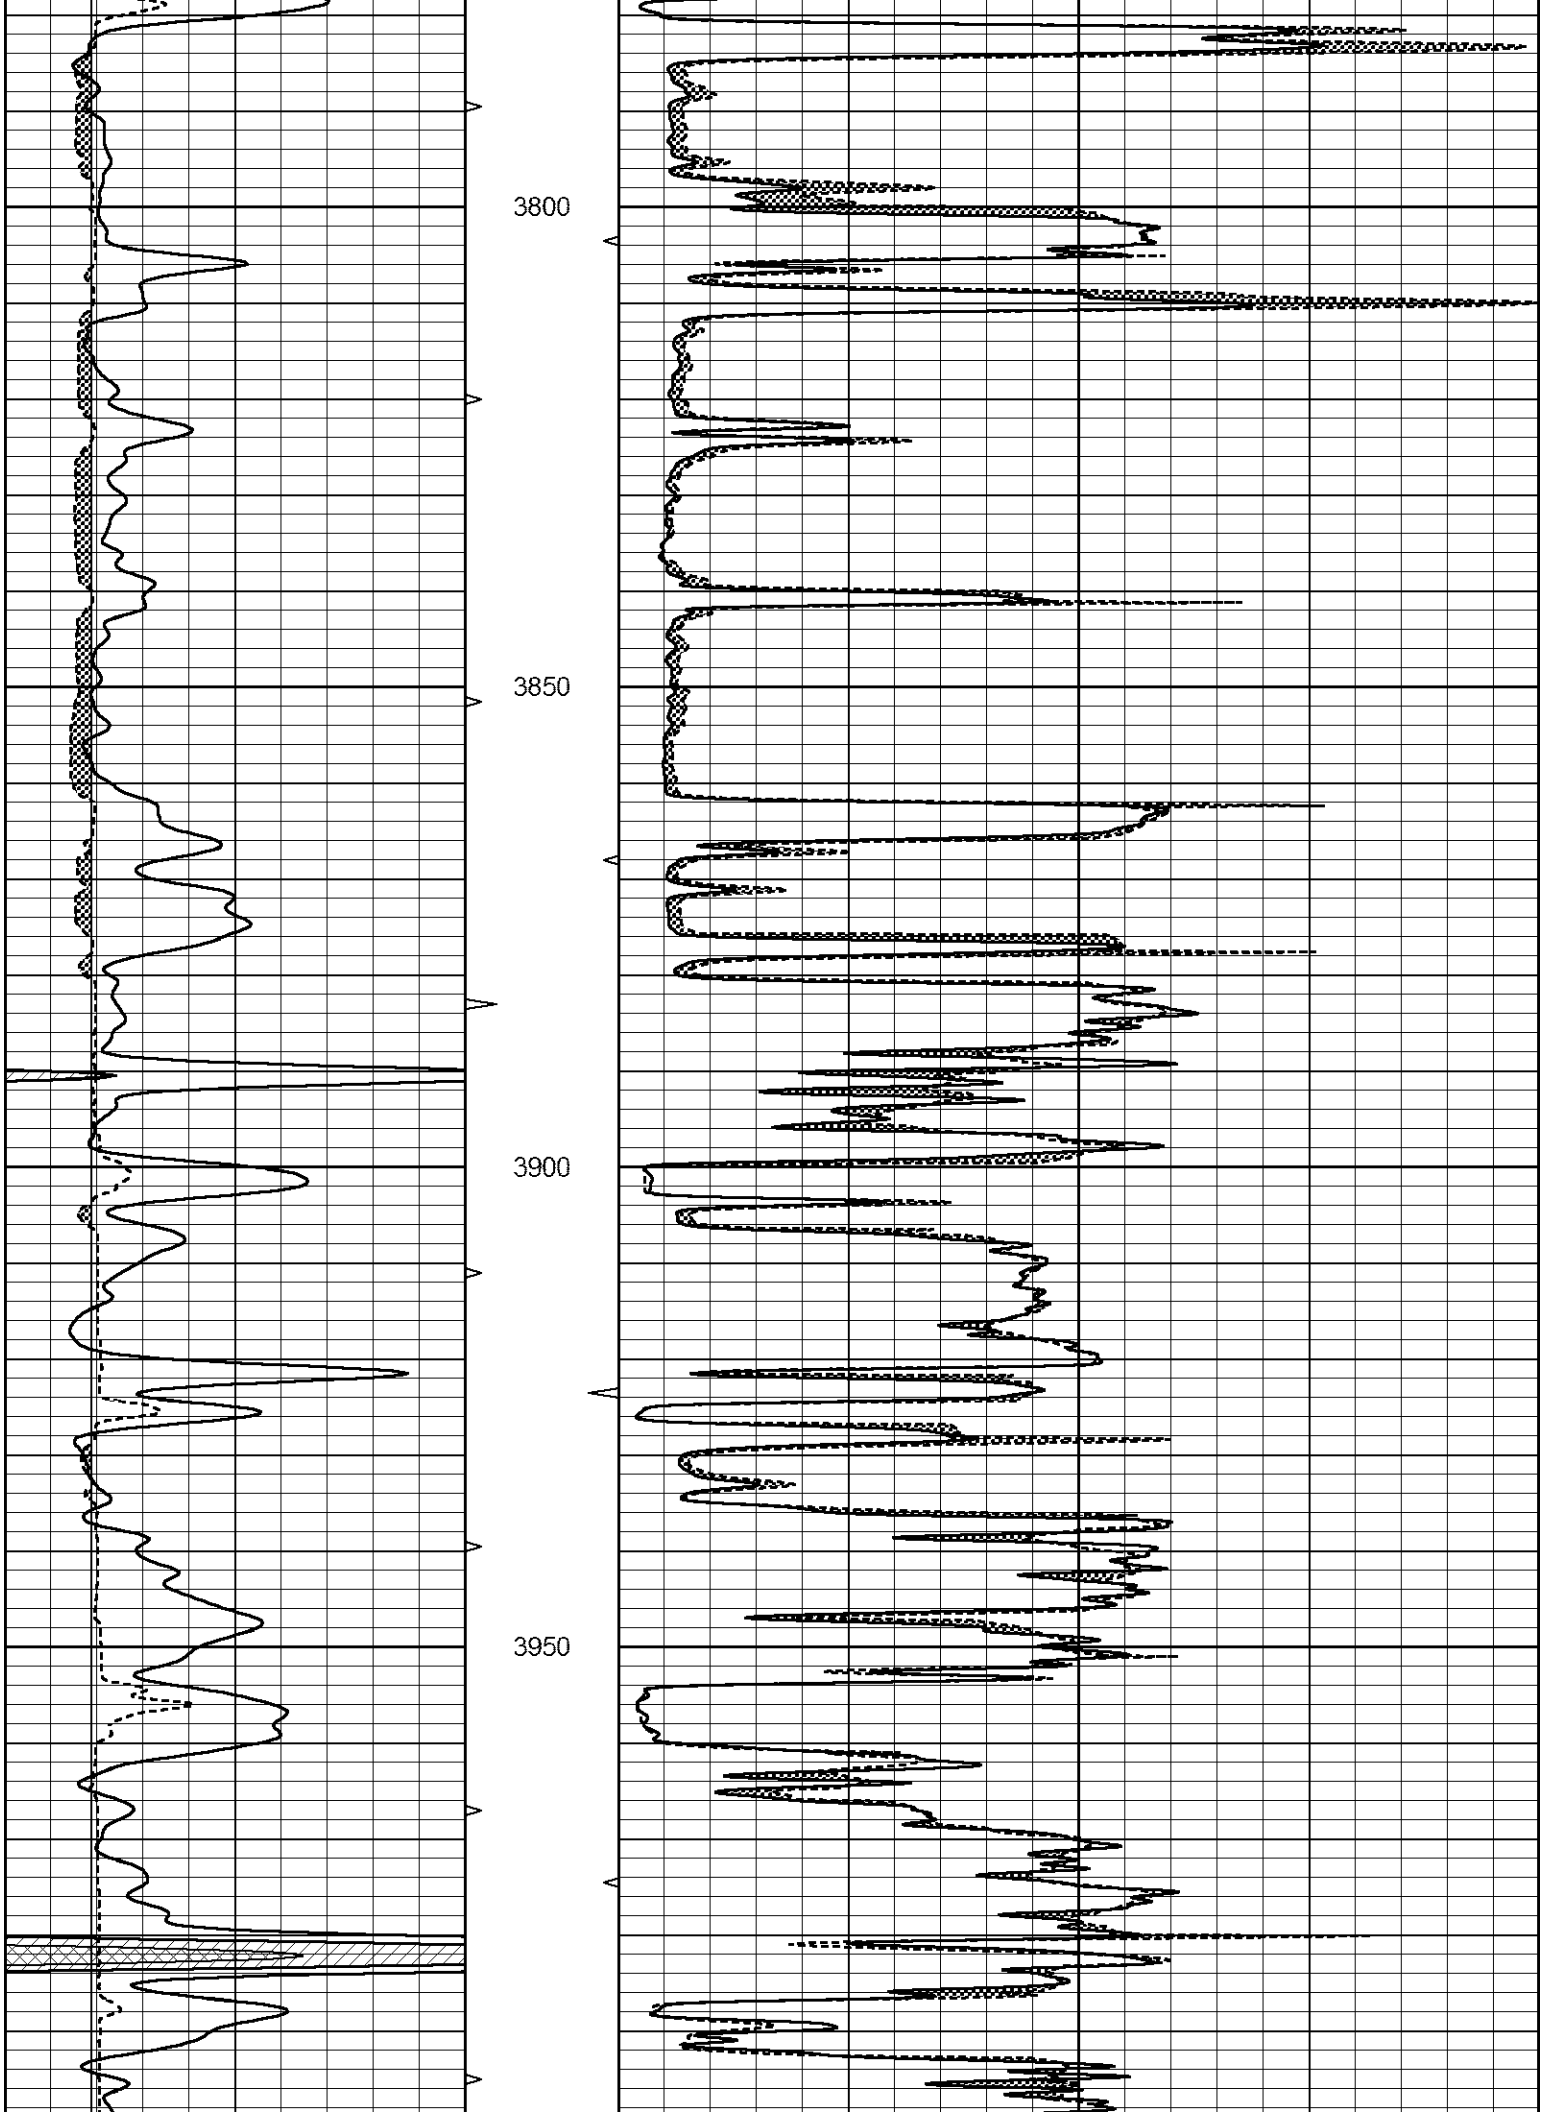
3800
3850
3900
3950

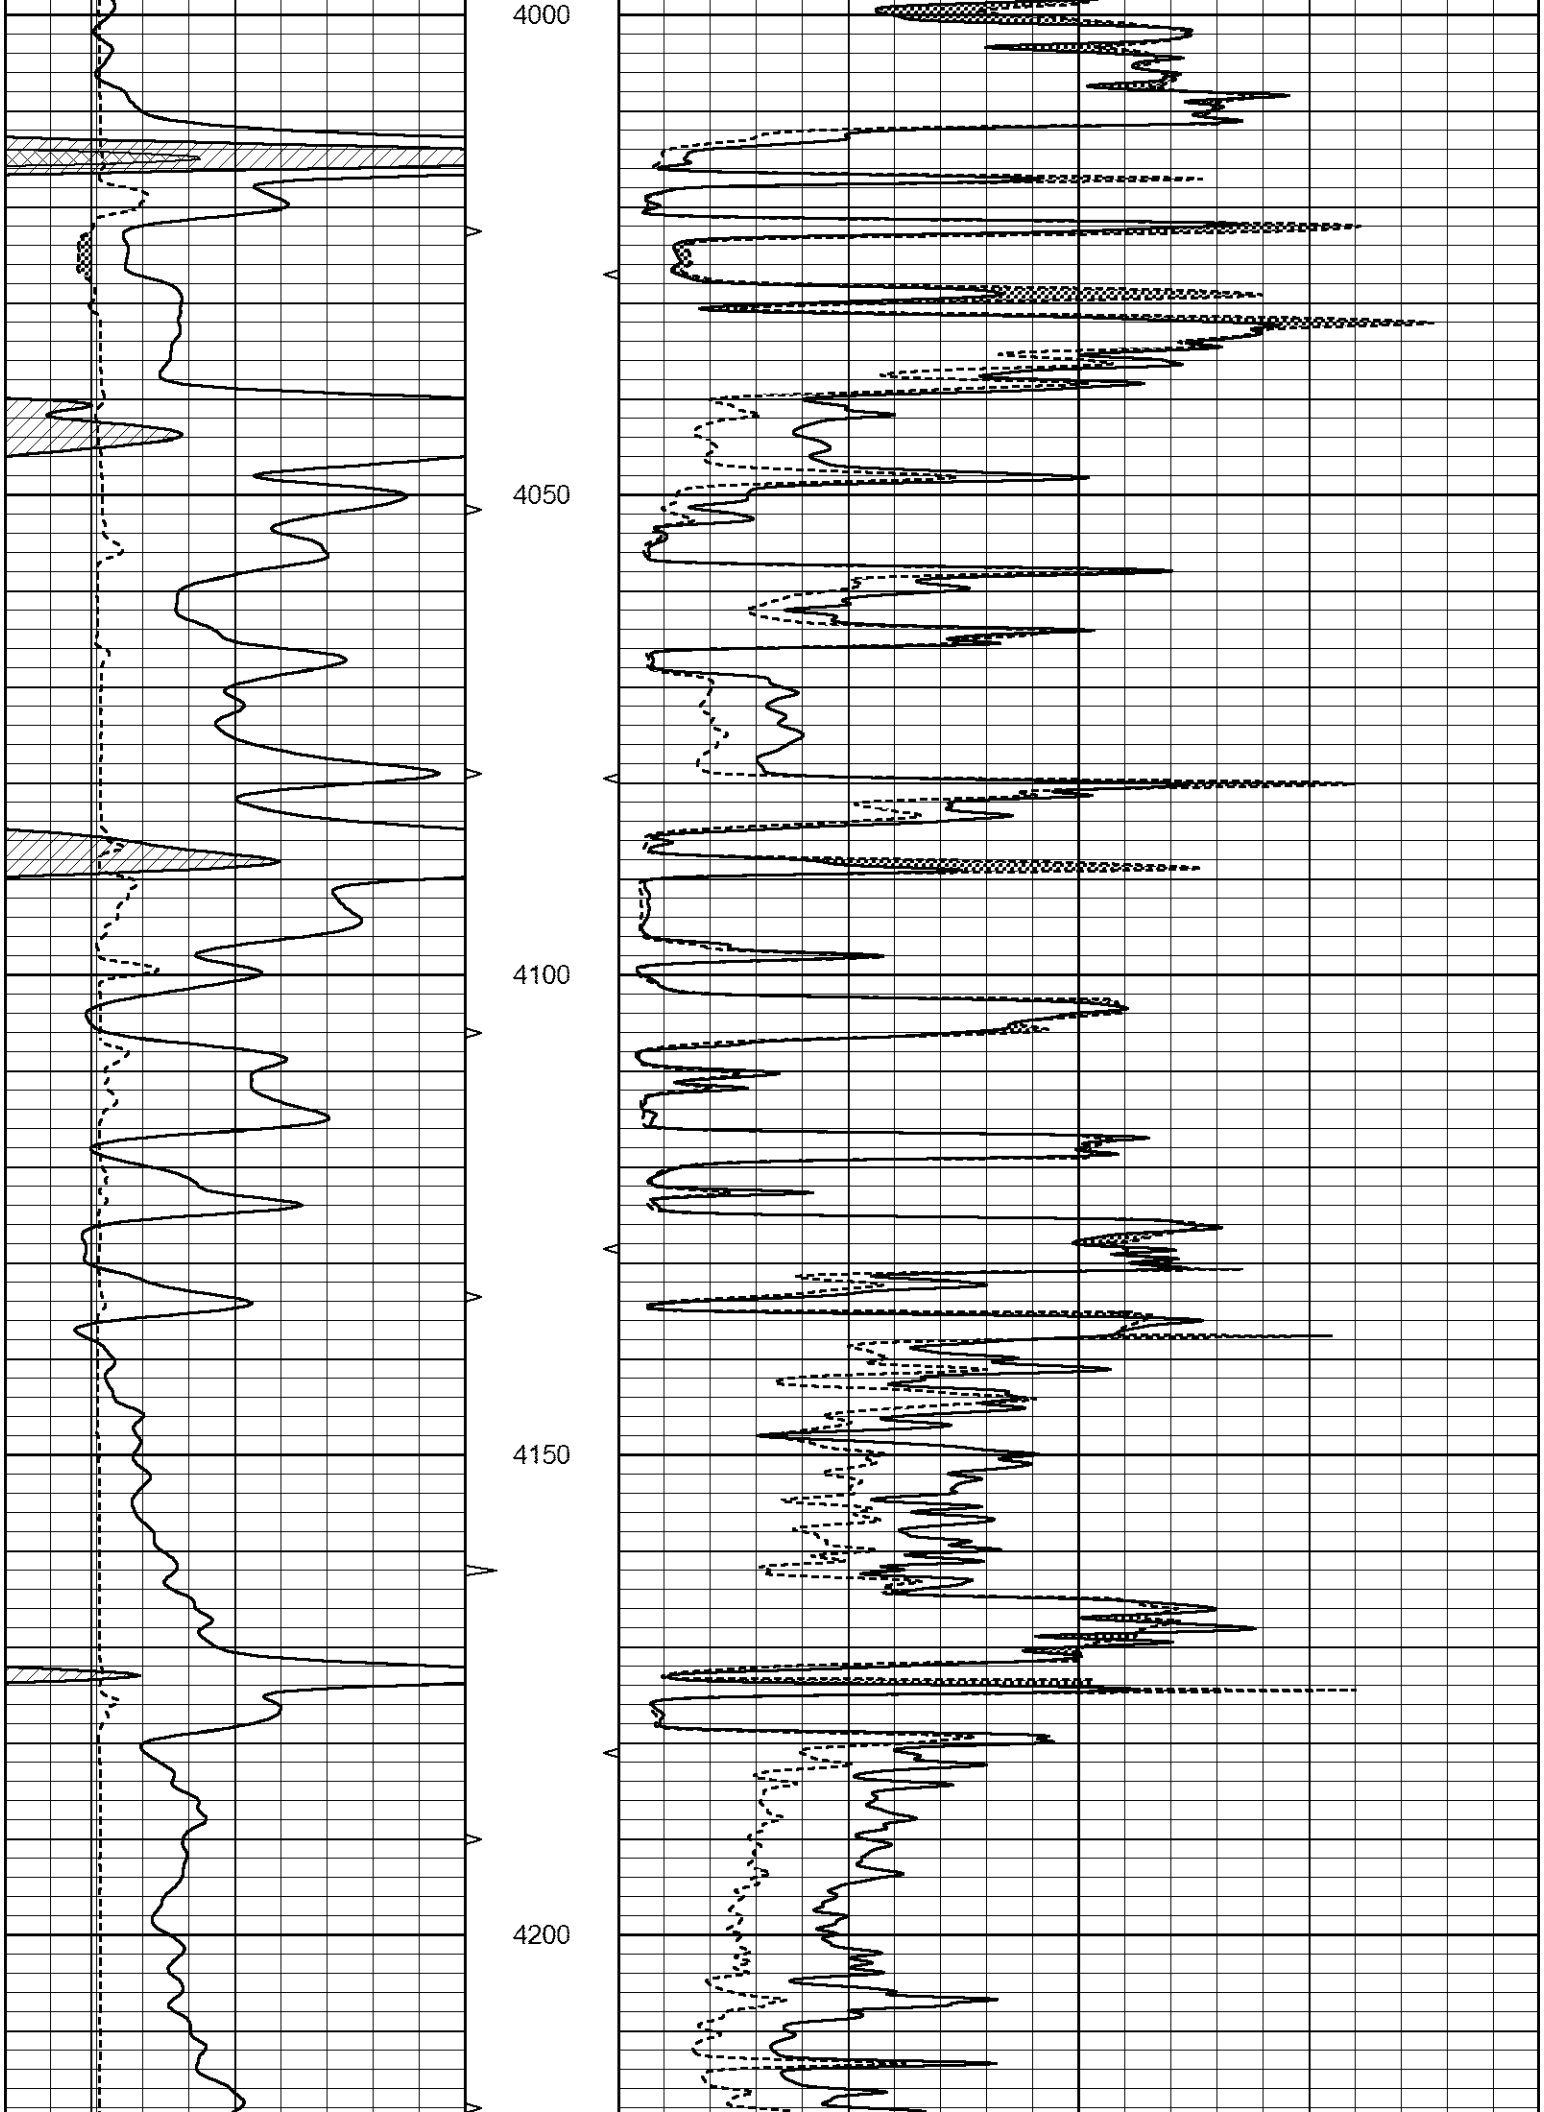
4000
4050
4100
4150
4200

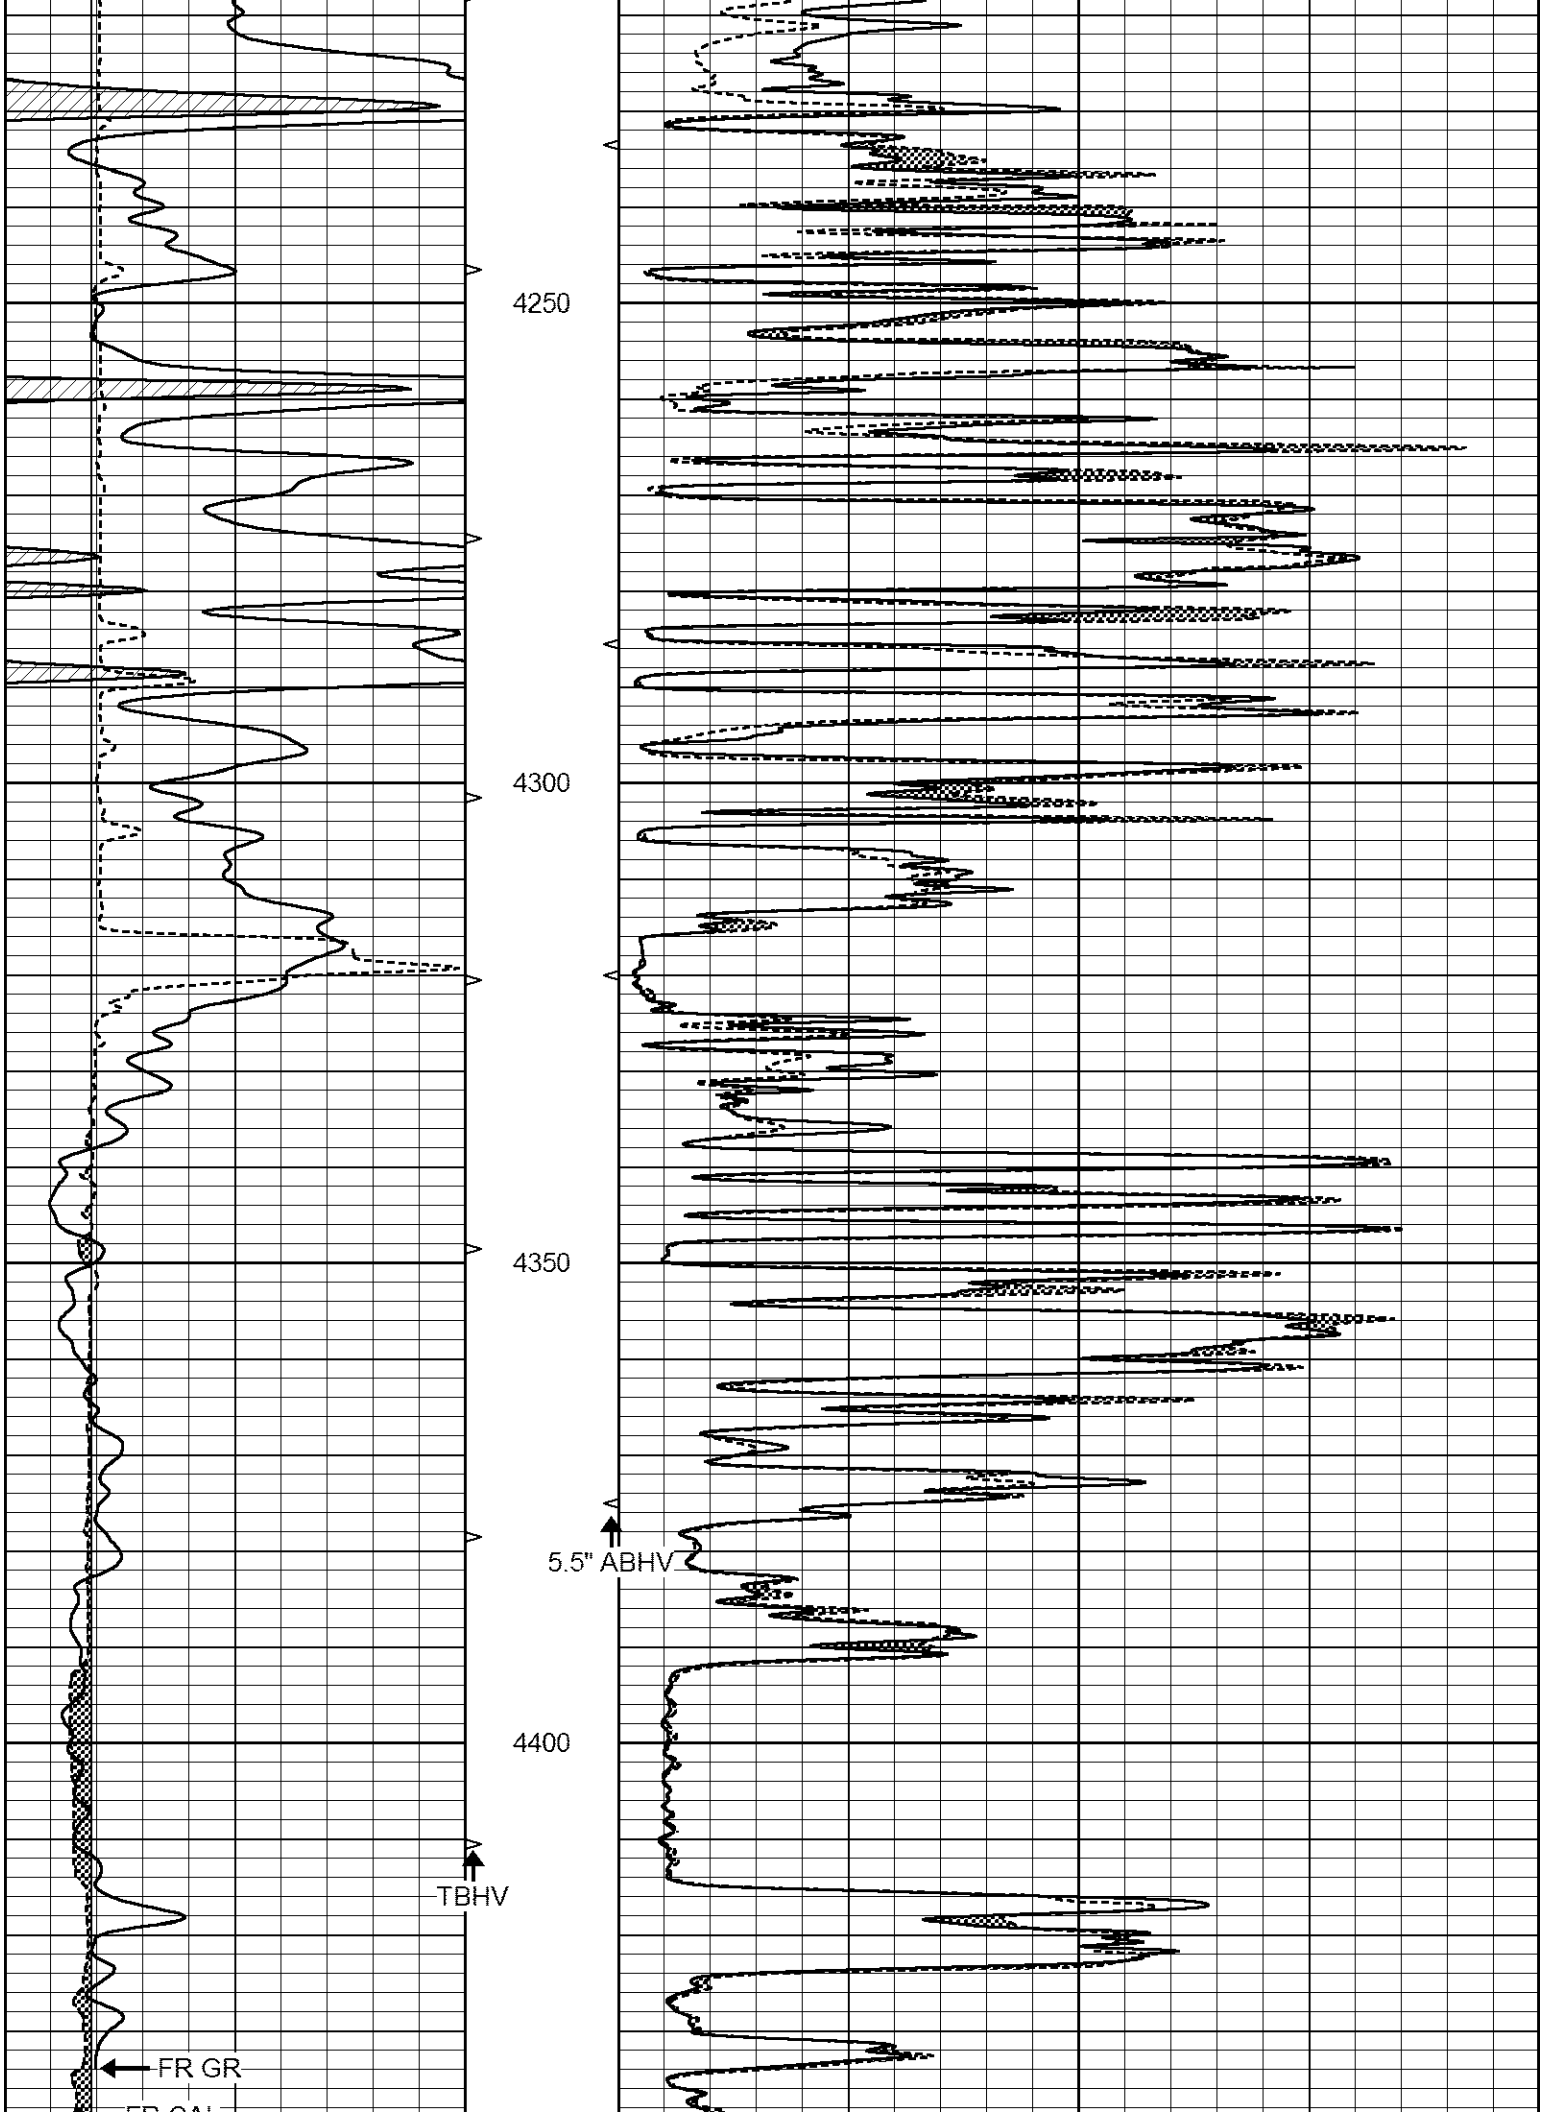
4250
4300
4350
5.5" ABHV
4400
TBHV
FR GR

FR CAL

MEL1.5 → ← MEL2.0

4450


LTD 4457


0	GAMMA RAY (GAPI) 150	ABHV		0	MEL1.5 (Ohm-m) 40
6	CALIPER (in) 16	10 (ft3)	0	0	MEL2.0 (Ohm-m) 40
		TBHV			
		0 (ft3)	10		

REPEAT SECTION

Database File	6771pe.db
Dataset Pathname	pass8MELR
Presentation Format	_micro
Dataset Creation	Tue Aug 16 19:02:52 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI) 150	ABHV		0	MEL1.5 (Ohm-m) 40
6	CALIPER (in) 16	10 (ft3)	0	0	MEL2.0 (Ohm-m) 40
		TBHV			
		0 (ft3)	10		

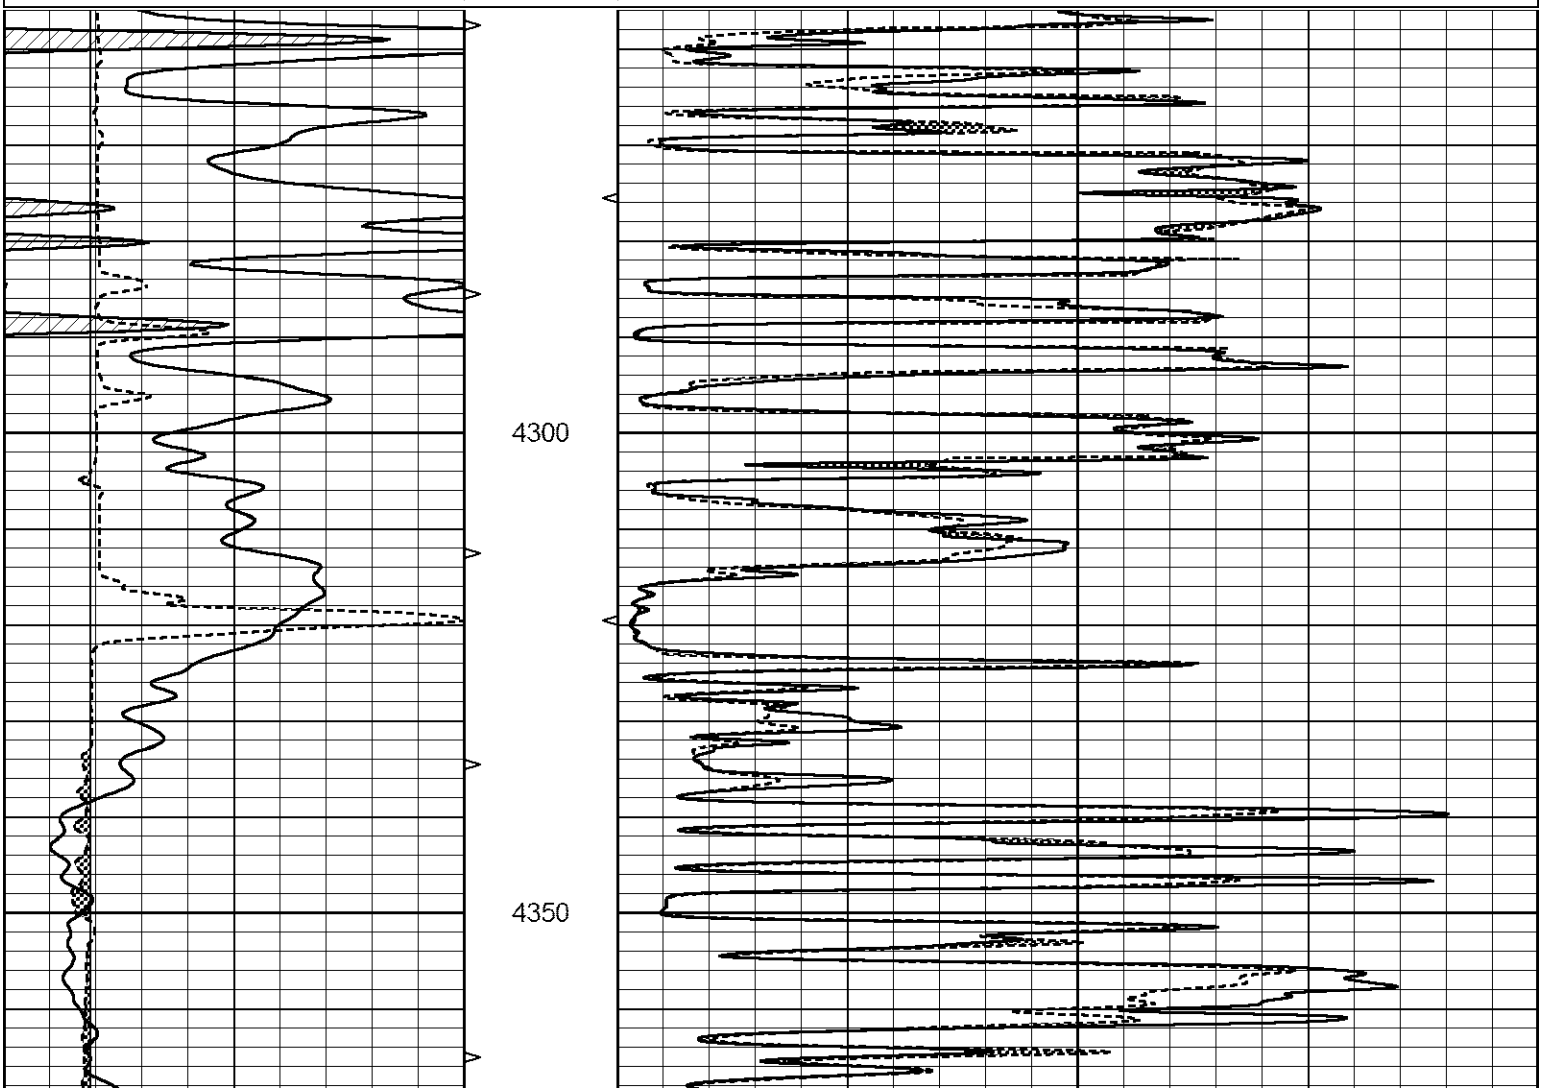

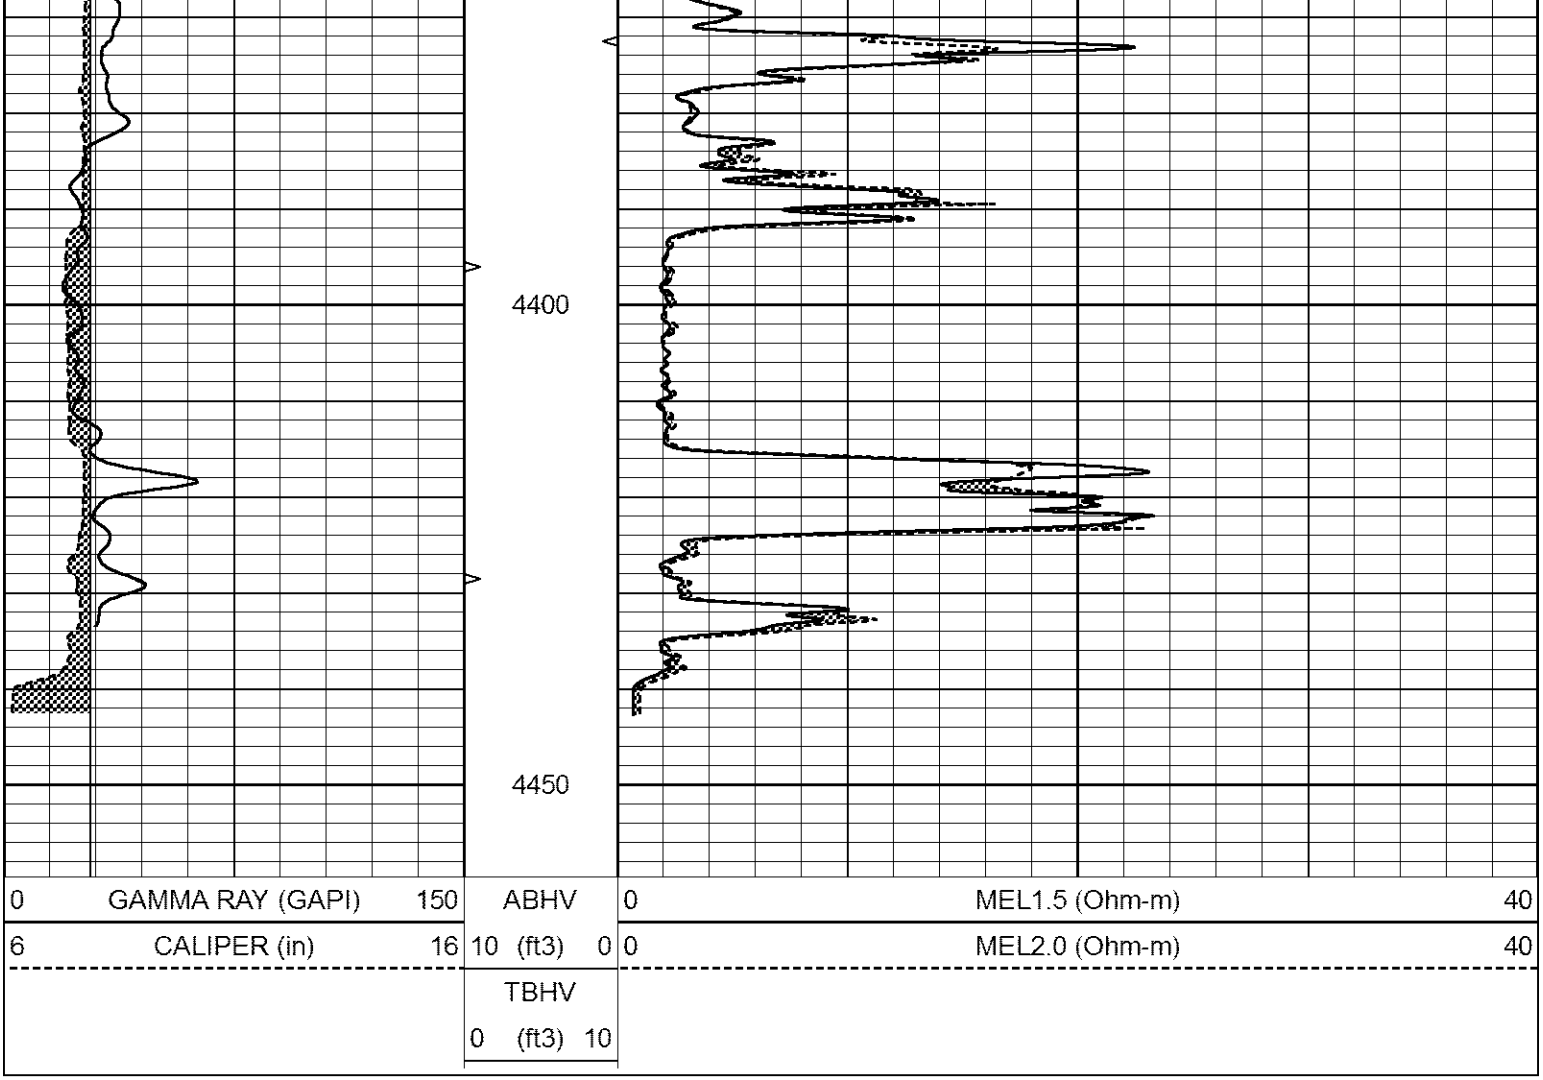

Calibration Report

Database File	6771pe.db
Dataset Pathname	pass8MELR
Dataset Creation	Tue Aug 16 19:02:52 2022

MICRO_USR Calibration Report

Serial Number:	070911	
Tool Model:	ProbeL	
Performed:	Mon Jul 18 22:18:37 2022	
Caliper Calibration:	Gain=4.500	Offset=0.650
	Low Cal	High Cal
References	8.000	14.000
Readings	1.451	3.049
1.5" Calibration:	Gain=19.250	Offset=0.000
	Low Cal	High Cal
References	0.000	20.000
Readings	0.004	0.843
2" Calibration:	Gain=16.500	Offset=0.100
	Low Cal	High Cal
References	0.000	20.000
Readings	0.021	0.810

Microlog Calibration Report

Serial-Model:	070911-ProbeL
Performed:	Sat May 14 04:48:25 2022

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0002	0.4836	V	0.0000	10.0000	Ohm-m	20.6908	-0.0051
Inverse	0.0018	0.6297	V	0.0000	10.0000	Ohm-m	15.9263	-0.0282
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000

Gamma Ray Calibration Report

Serial Number:	070558	
Tool Model:	Probe1	
Performed:	Sat Jul 02 05:55:58 2022	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2600	GAPI/cps