



MICRO
LOG

Company	MULL DRILLING COMPANY, INC.	Location:	API # : 15-111-20558-0000	Other Services CDL/CNL/PE DIL/SON
Well	WEEDEN #1-28	Permanent Datum	SEC 28 TWP 21S RGE 12E	Elevation
Field	UNNAMED	Log Measured From	GROUND LEVEL Elevation	K.B. 1238
County	LYON	Drilling Measured From	KELLY BUSHING 6' A.G.L	D.F. 1236
State	KANSAS		KELLY BUSHING	G.L. 1232
Date	6/16/22	Run Number	TWO	
Depth Driller	2050	Depth Logger	2047	
Bottom Logged Interval	2031	Top Log Interval	800	
Casing Driller	8 5/8"@40'	Casing Logger	50	
Bit Size	7 7/8	Type Fluid in Hole	CHEMICAL MUD	
Density / Viscosity	N/A	pH / Fluid Loss	N/A	
Source of Sample	FLOWLINE	Rm @ Meas. Temp	3.50@75F	
Rmf @ Meas. Temp	2.63@75F	Rmc @ Meas. Temp	4.20@75F	
Source of Rmf / Rmc	MEASUREMENT	Rm @ BHT	2.65@99F	
Time Circulation Stopped	6 HOURS	Time Logger on Bottom	6:30 P.M.	
Maximum Recorded Temperature	99F	Equipment Number	3802	
Location	HAYS, KANSAS	Recorded By	COLE ROBEN	
Witnessed By	BLAKE MILLER		RUSTY MOURNING	


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS


OLPE, KS. SOUTH ON KS-99, 3 MILES EAST ON RD. 30,
0.7 MILES SOUTH ON RD. R, EAST INTO

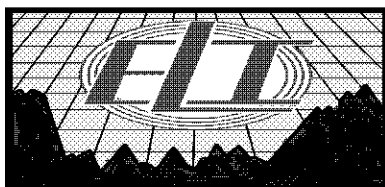


MAIN SECTION

Database File	6543pe.db
Dataset Pathname	pass6.1M
Presentation Format	_micro
Dataset Creation	Thu Jun 16 19:23:09 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

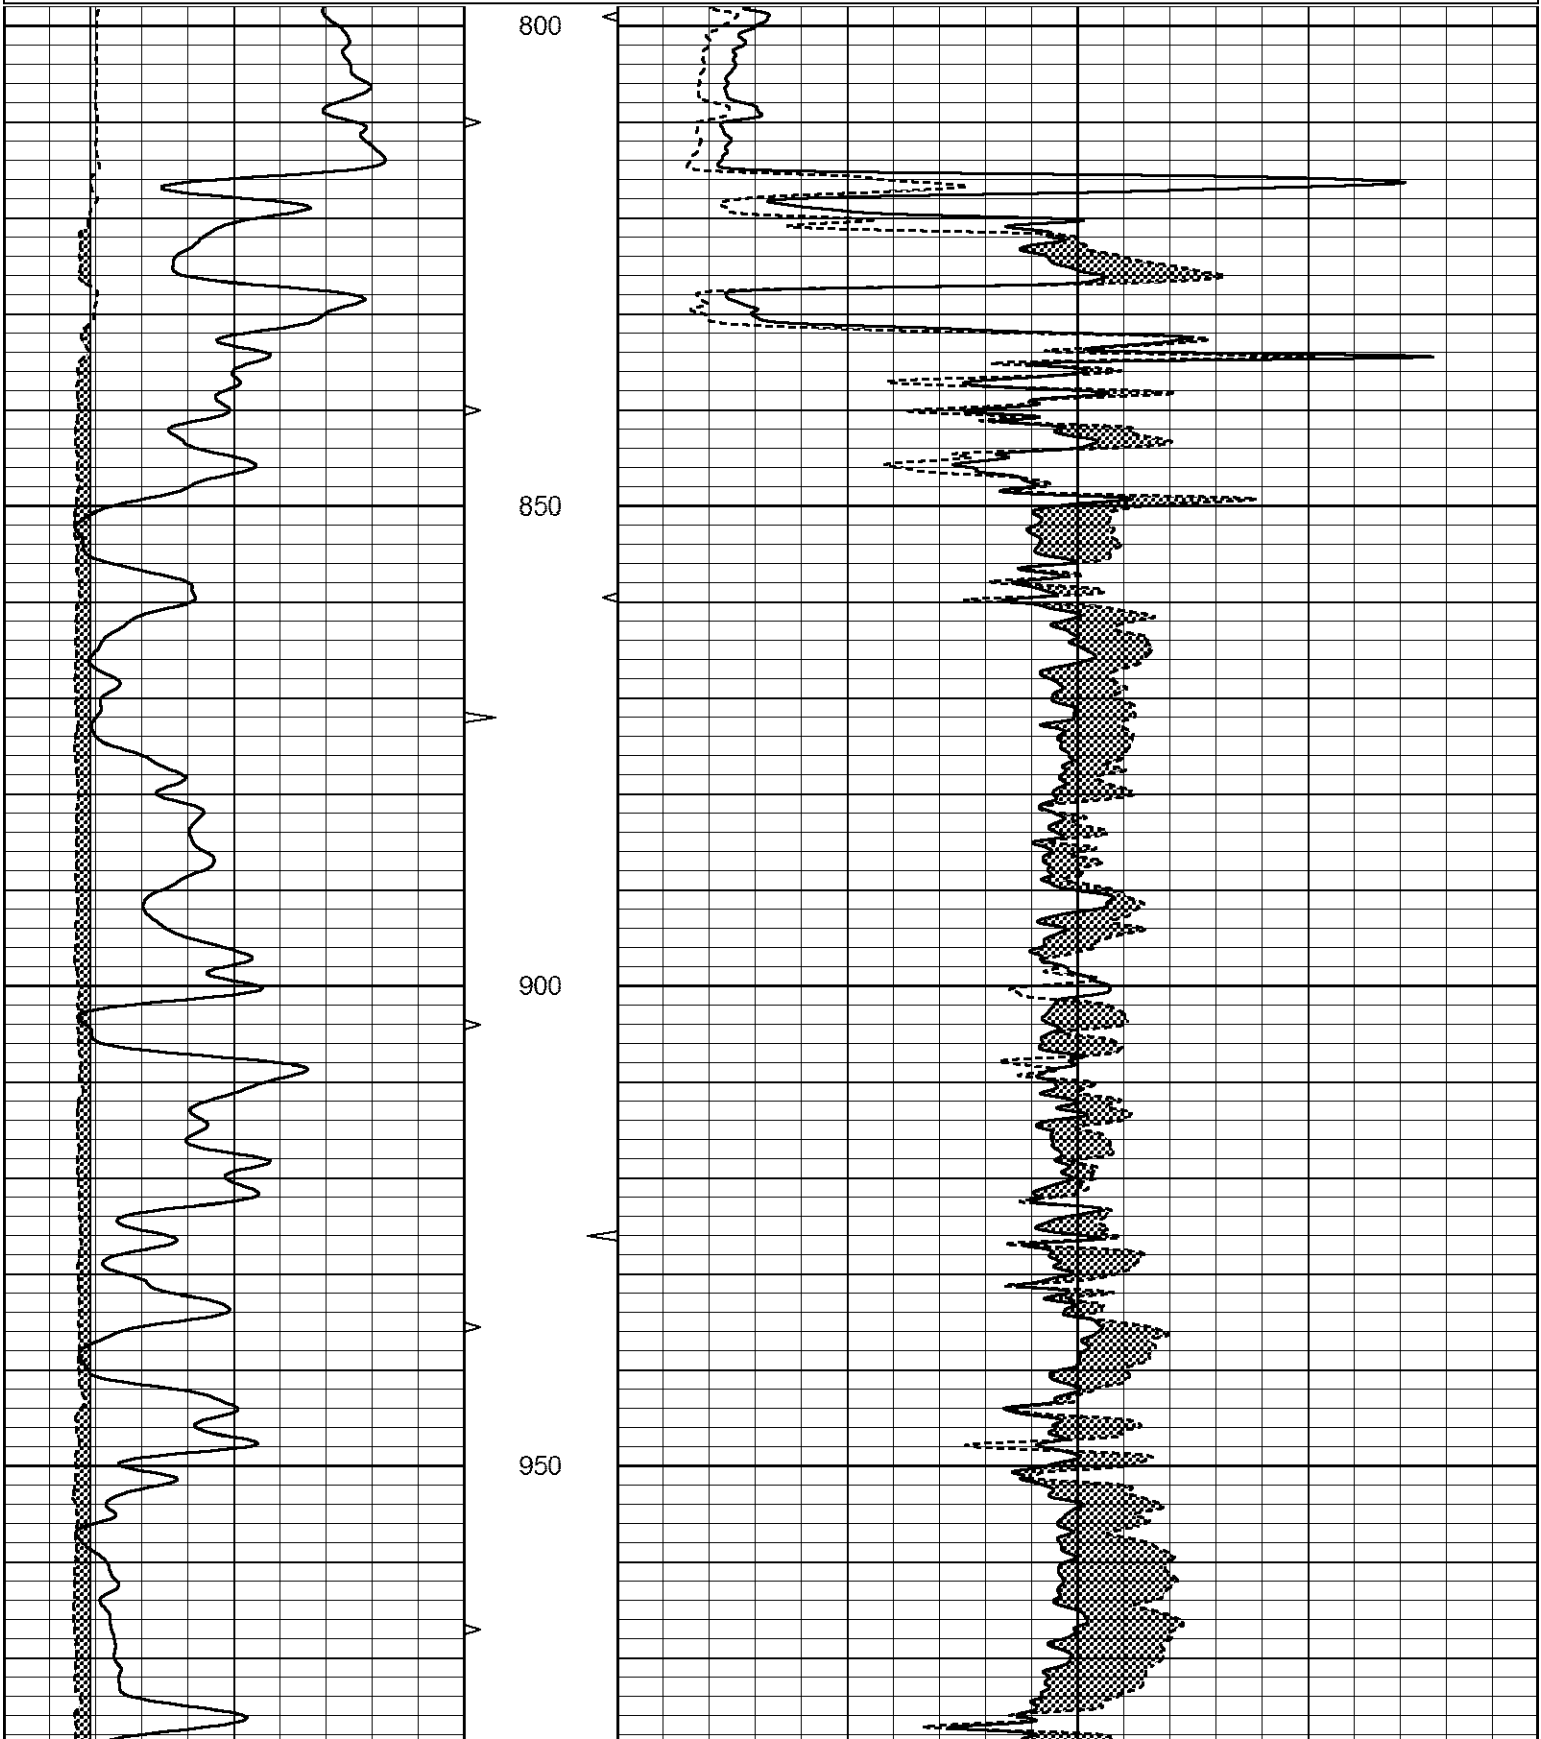

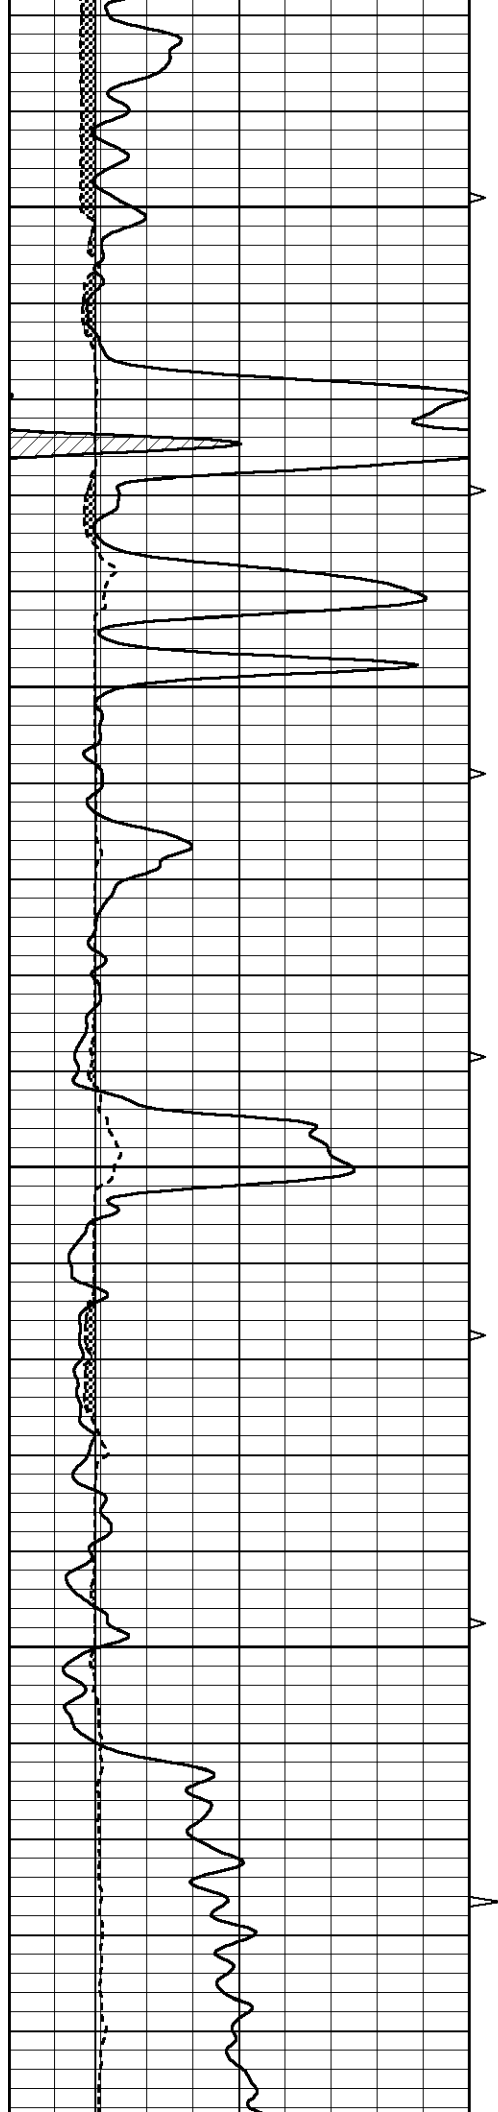



1000

1050

1100

1150

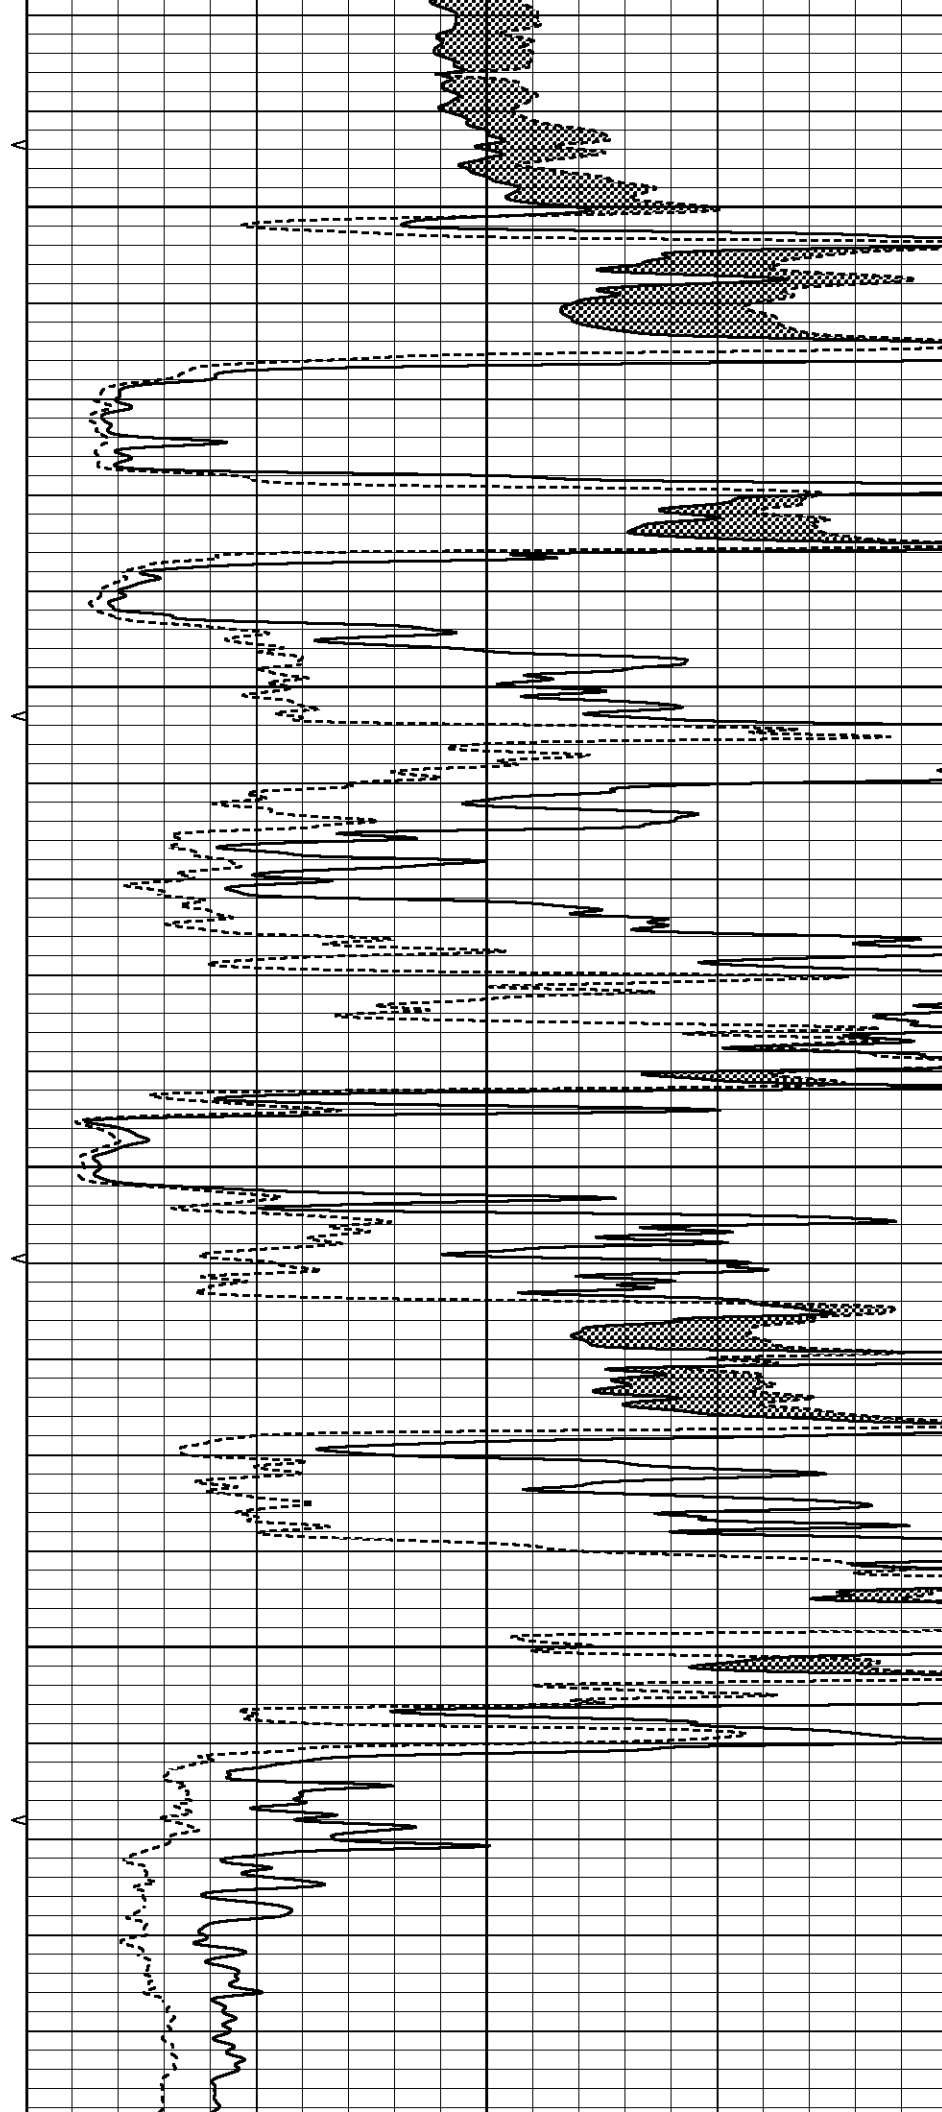

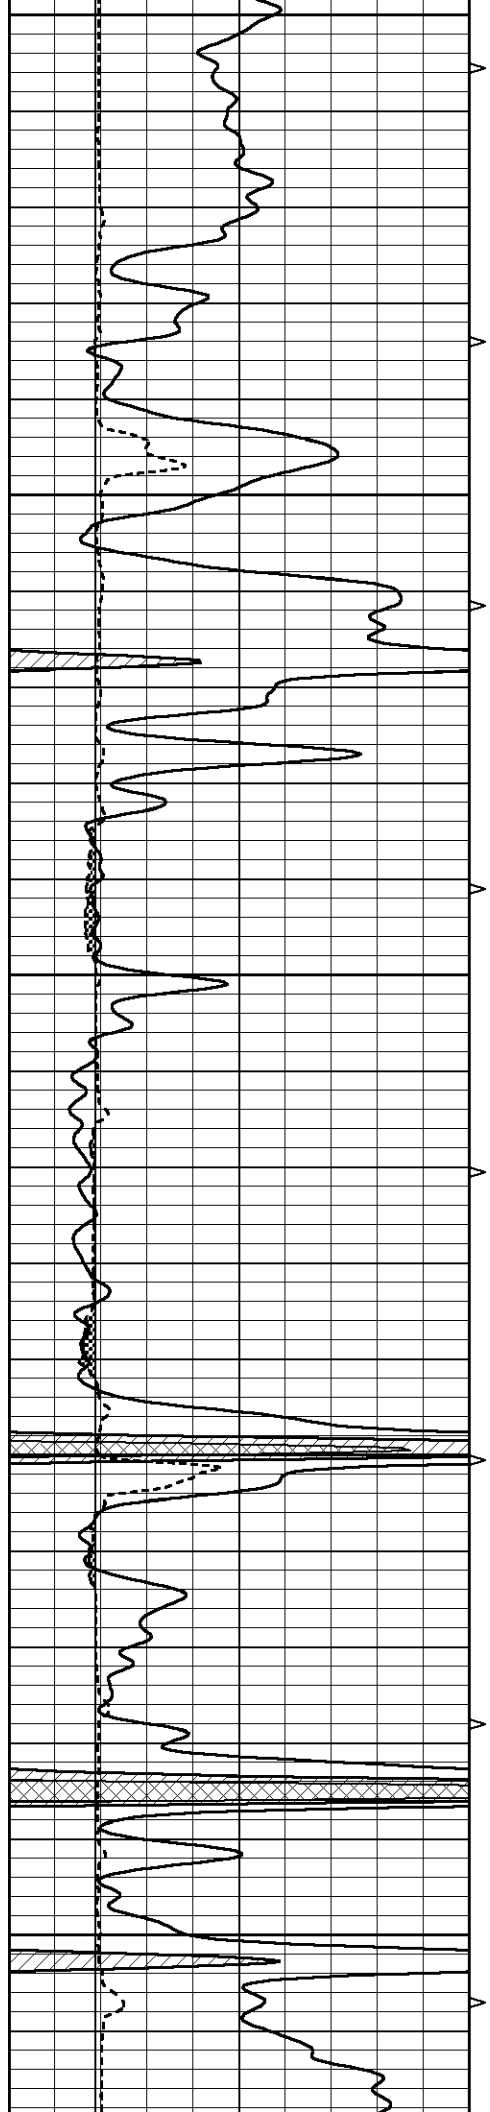


1200


1250

1300

1350

1400

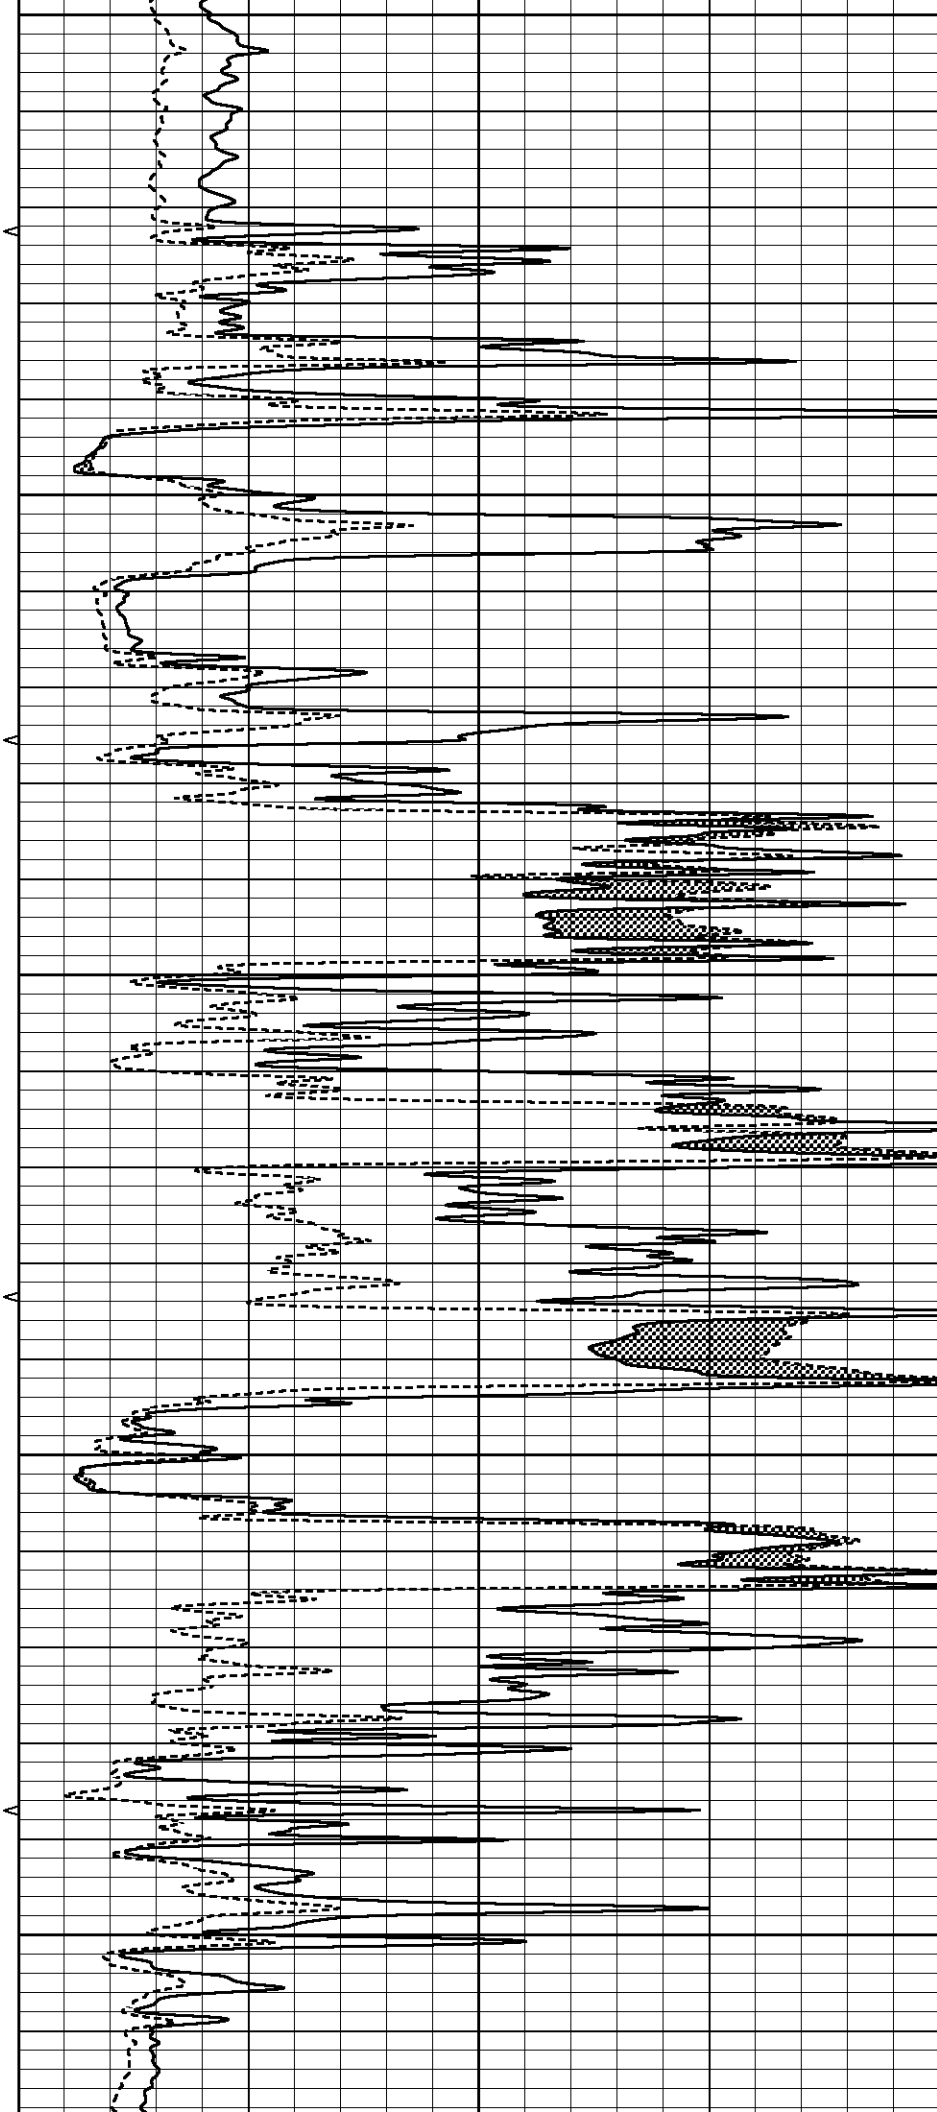

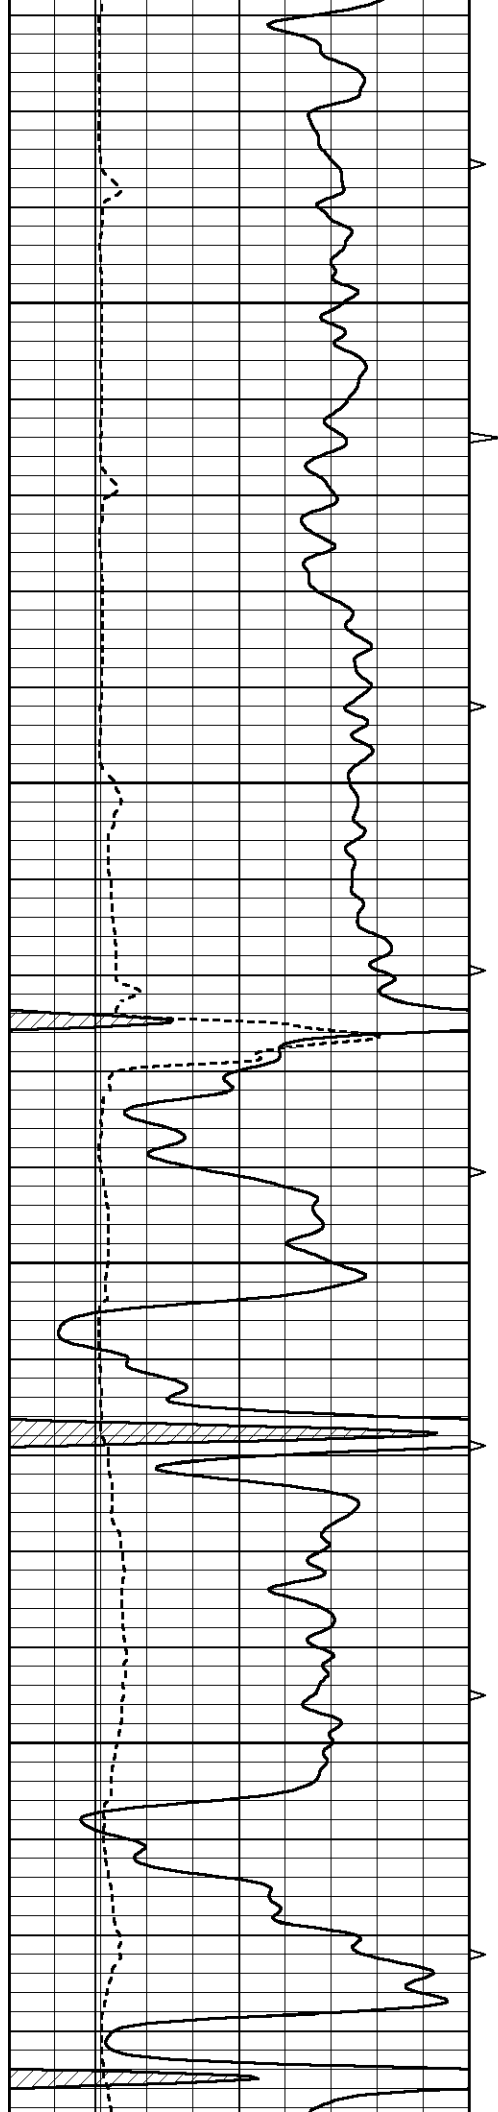



1450

1500

1550

1600

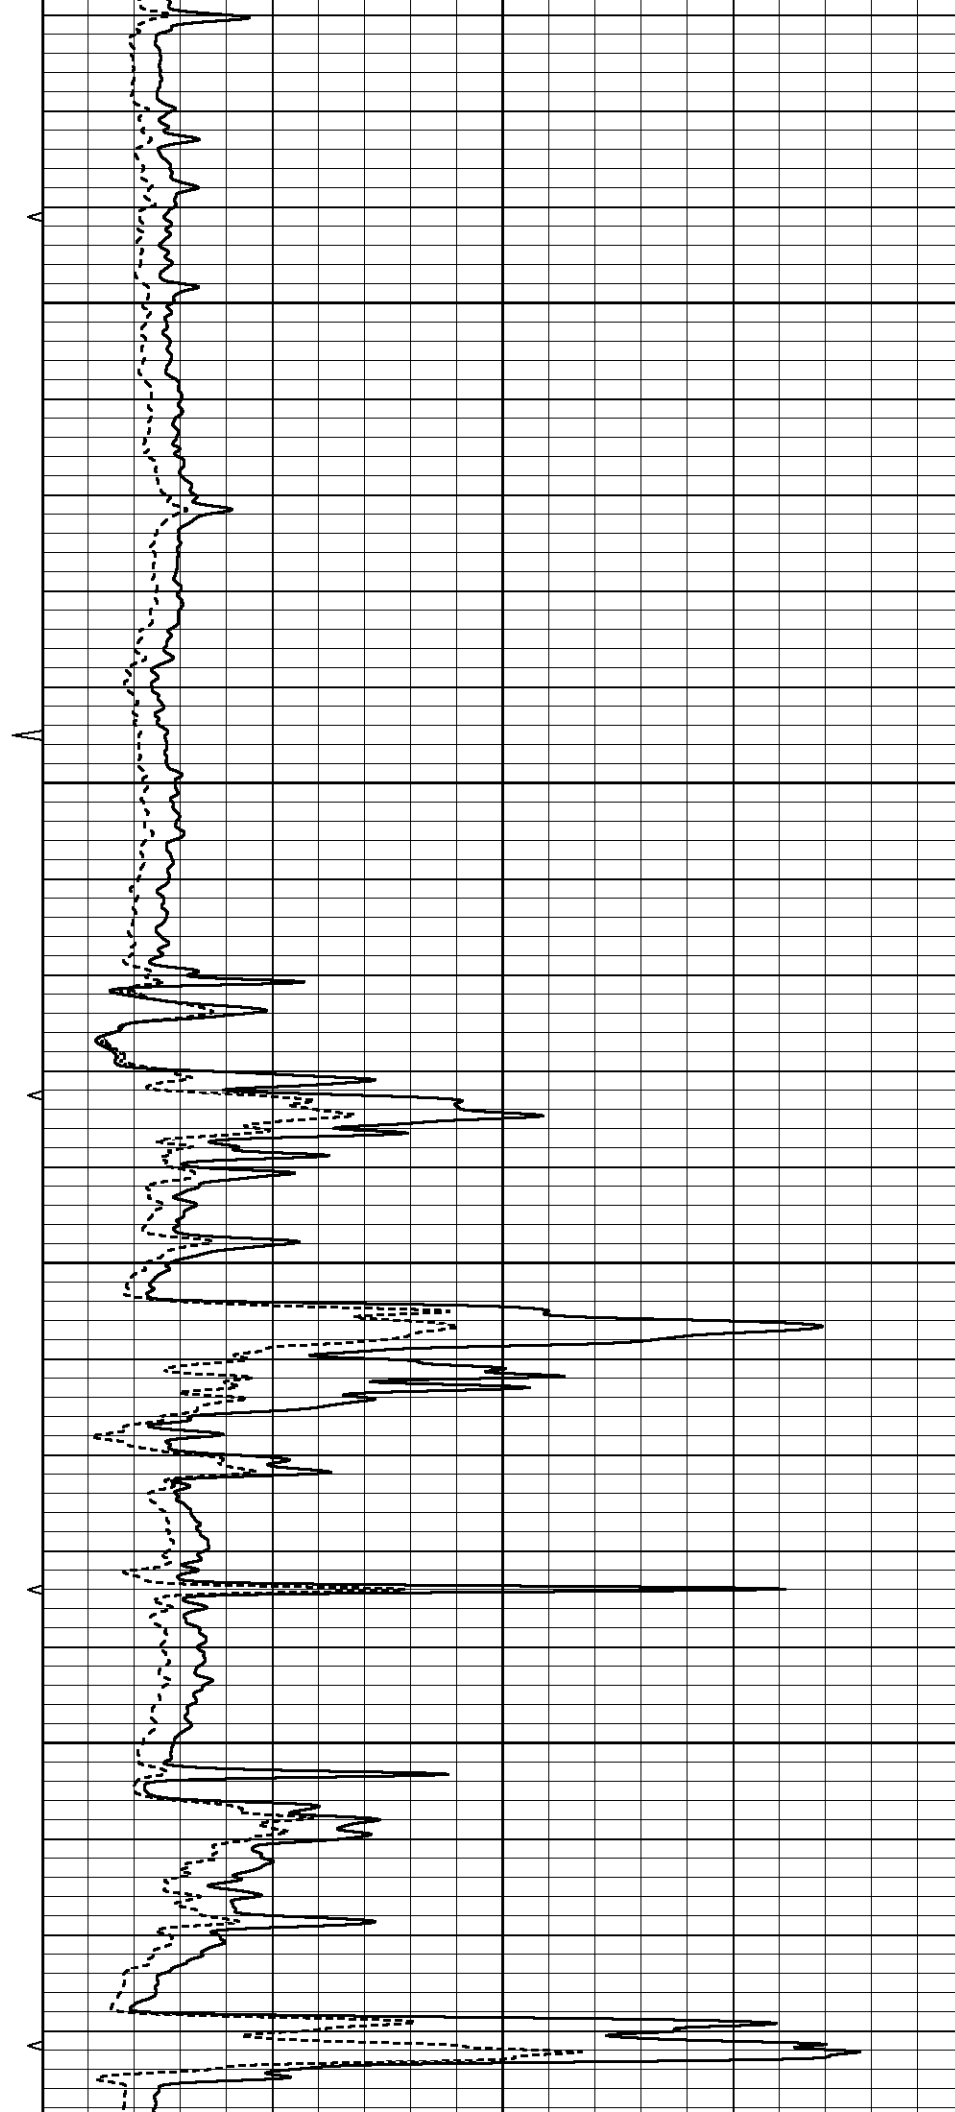

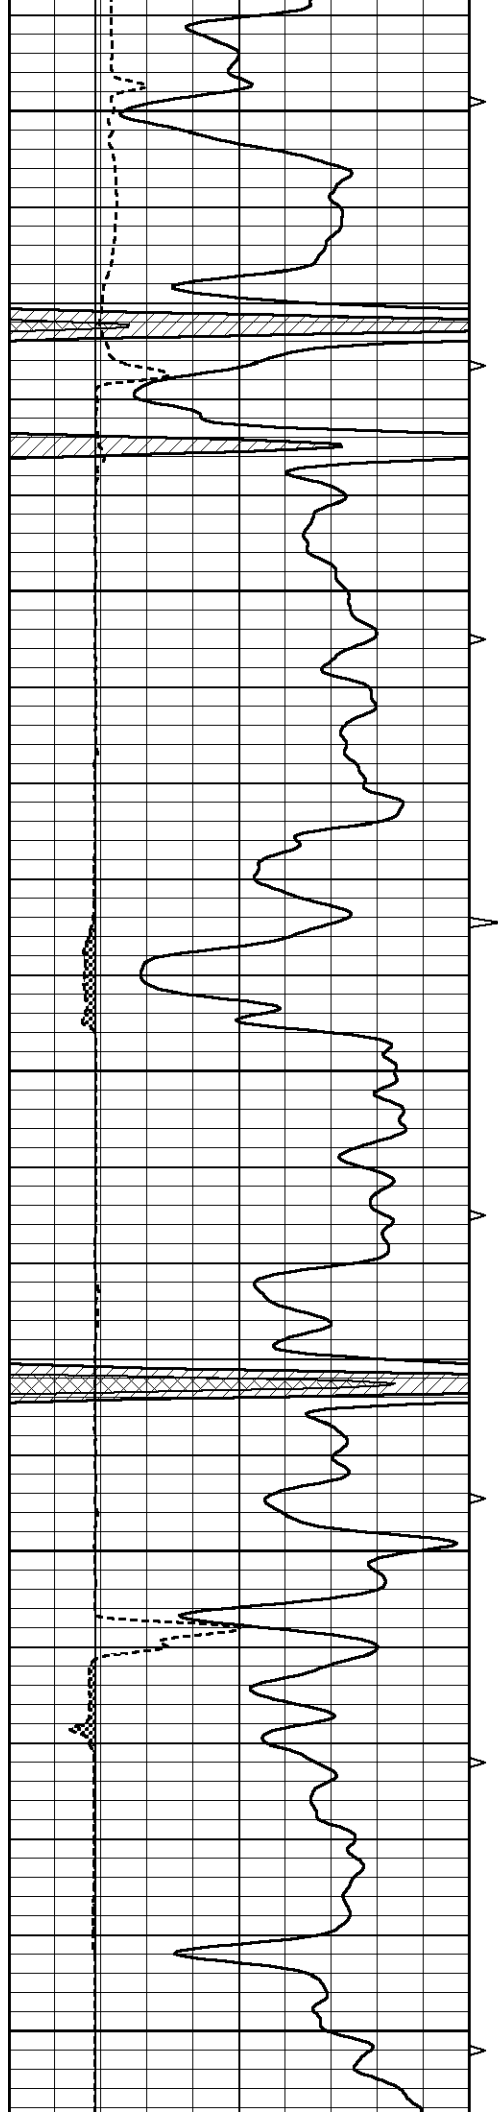


1650


1700


1750

1800

1850

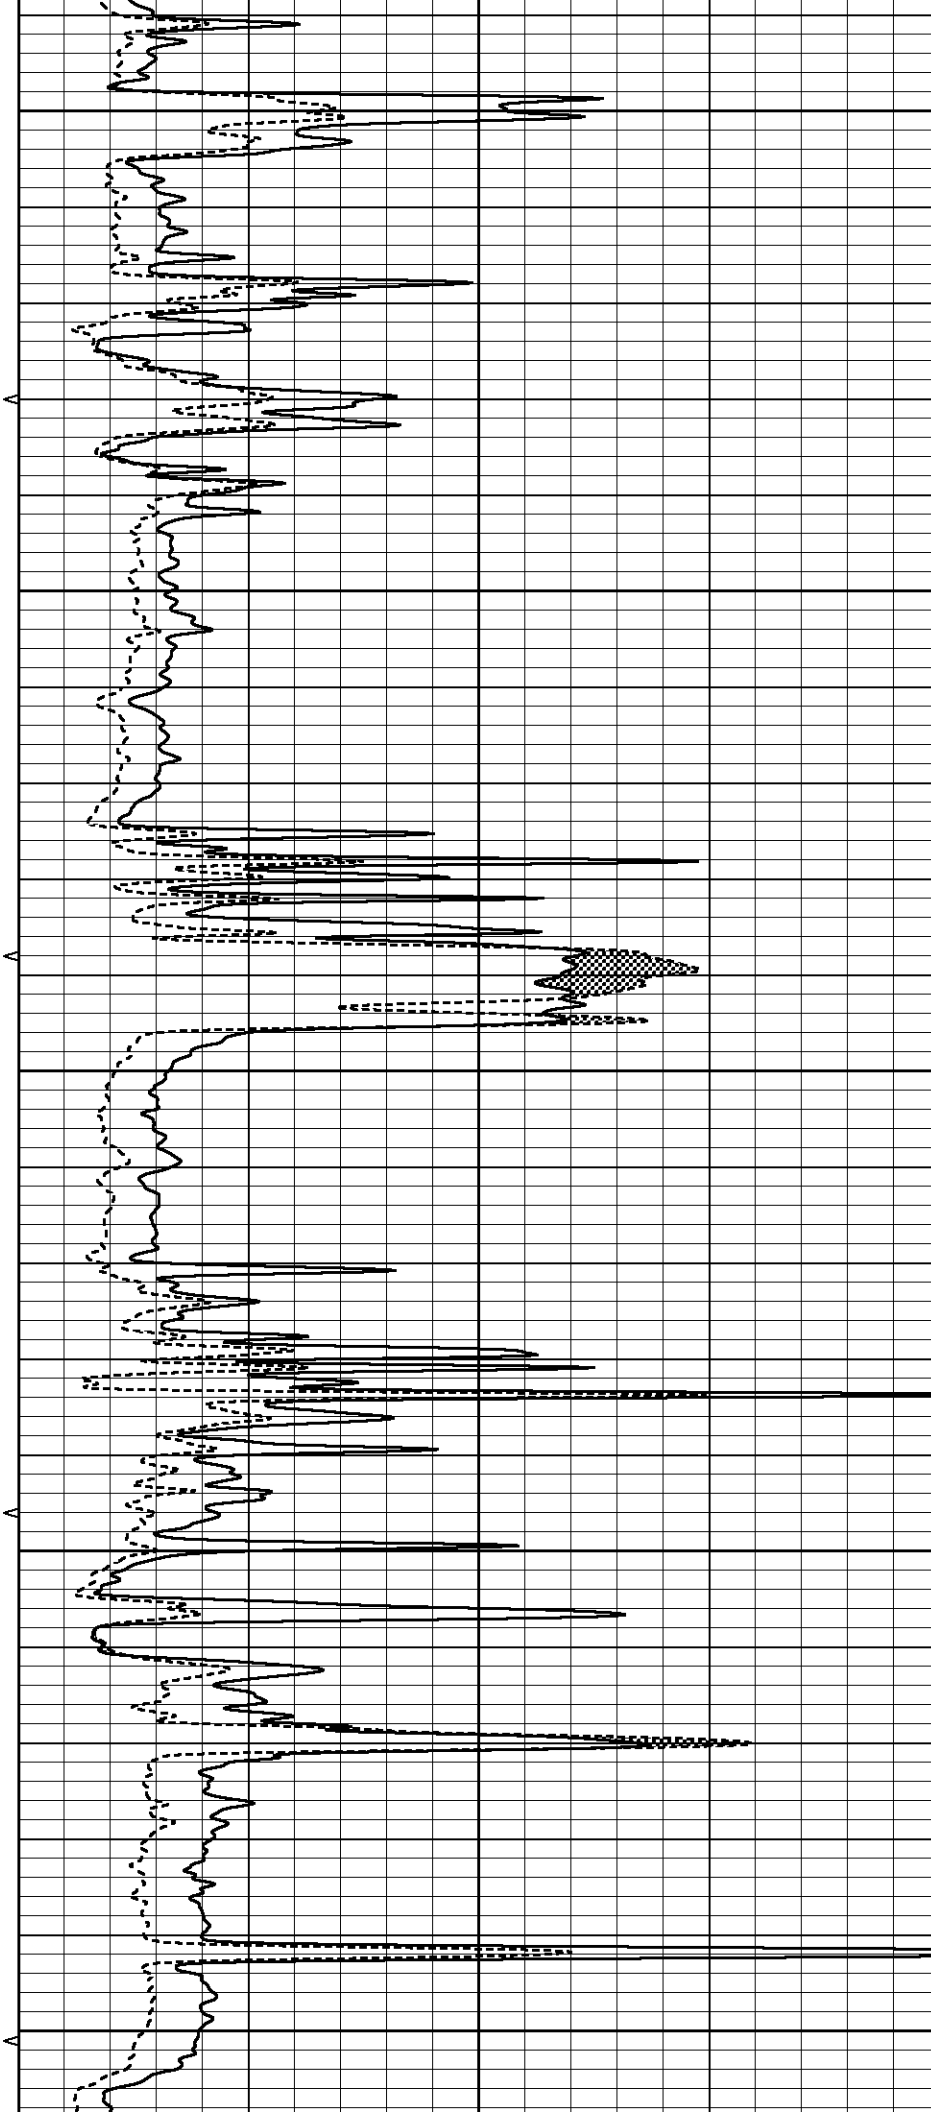

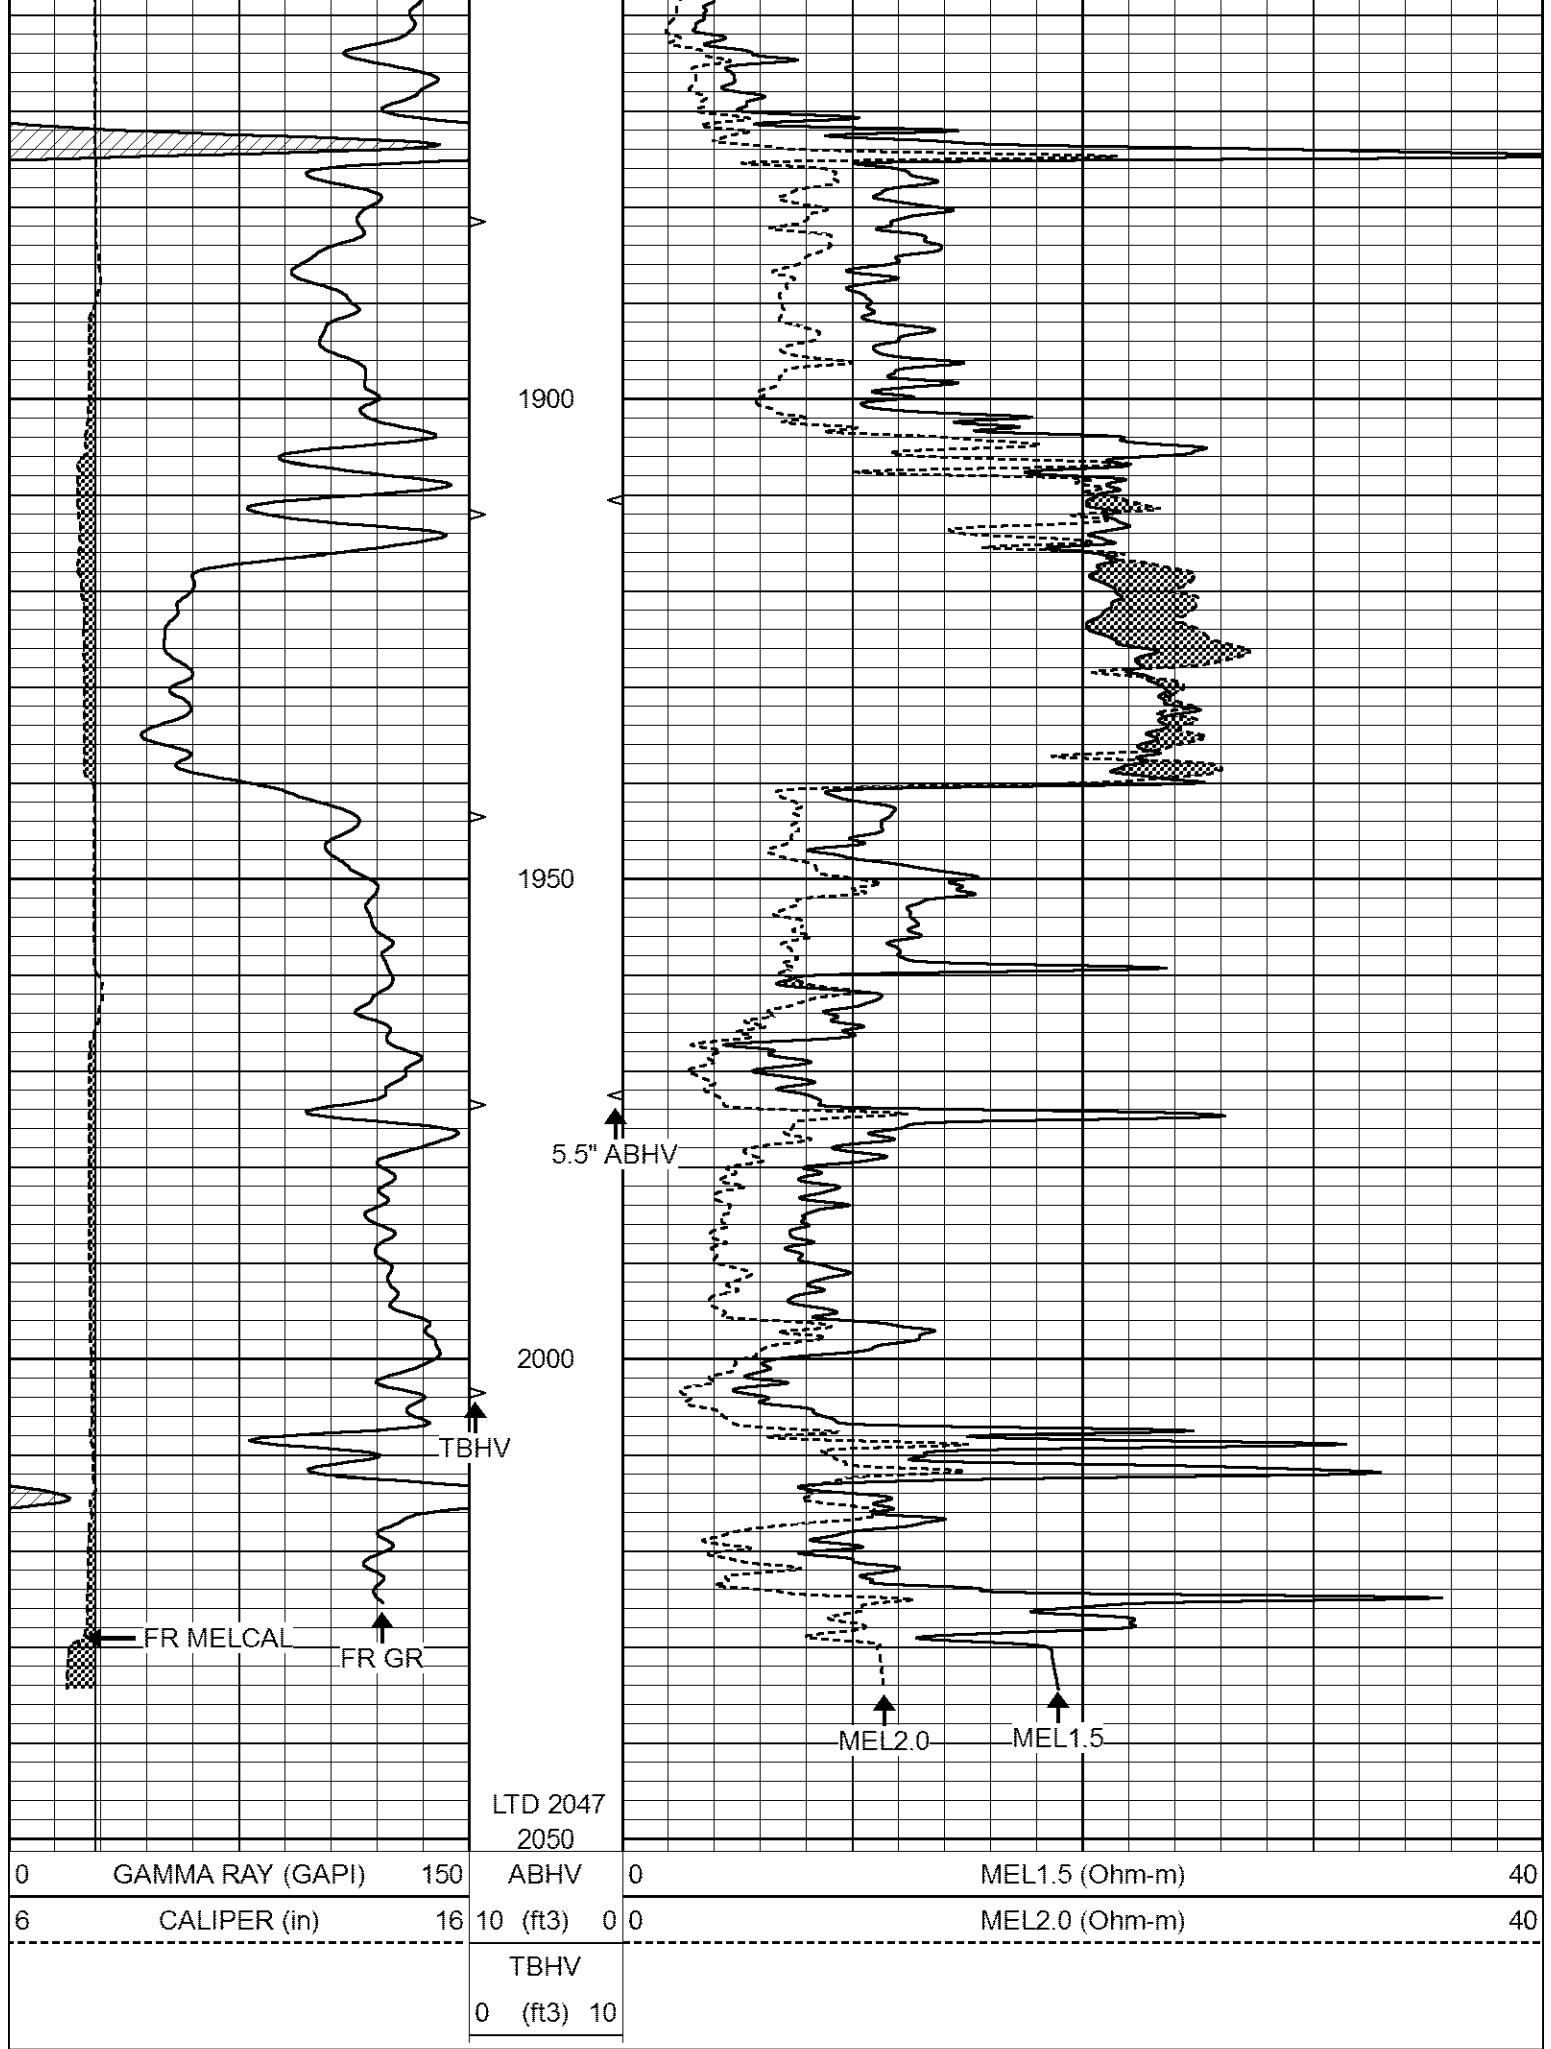


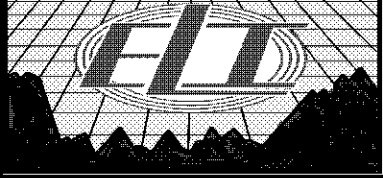


REPEAT SECTION

Database File 6543pe.db
Dataset Pathname pass5.1R
Presentation Format _micro
Dataset Creation Thu Jun 16 19:17:12 2022
Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0 0	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3) 10			

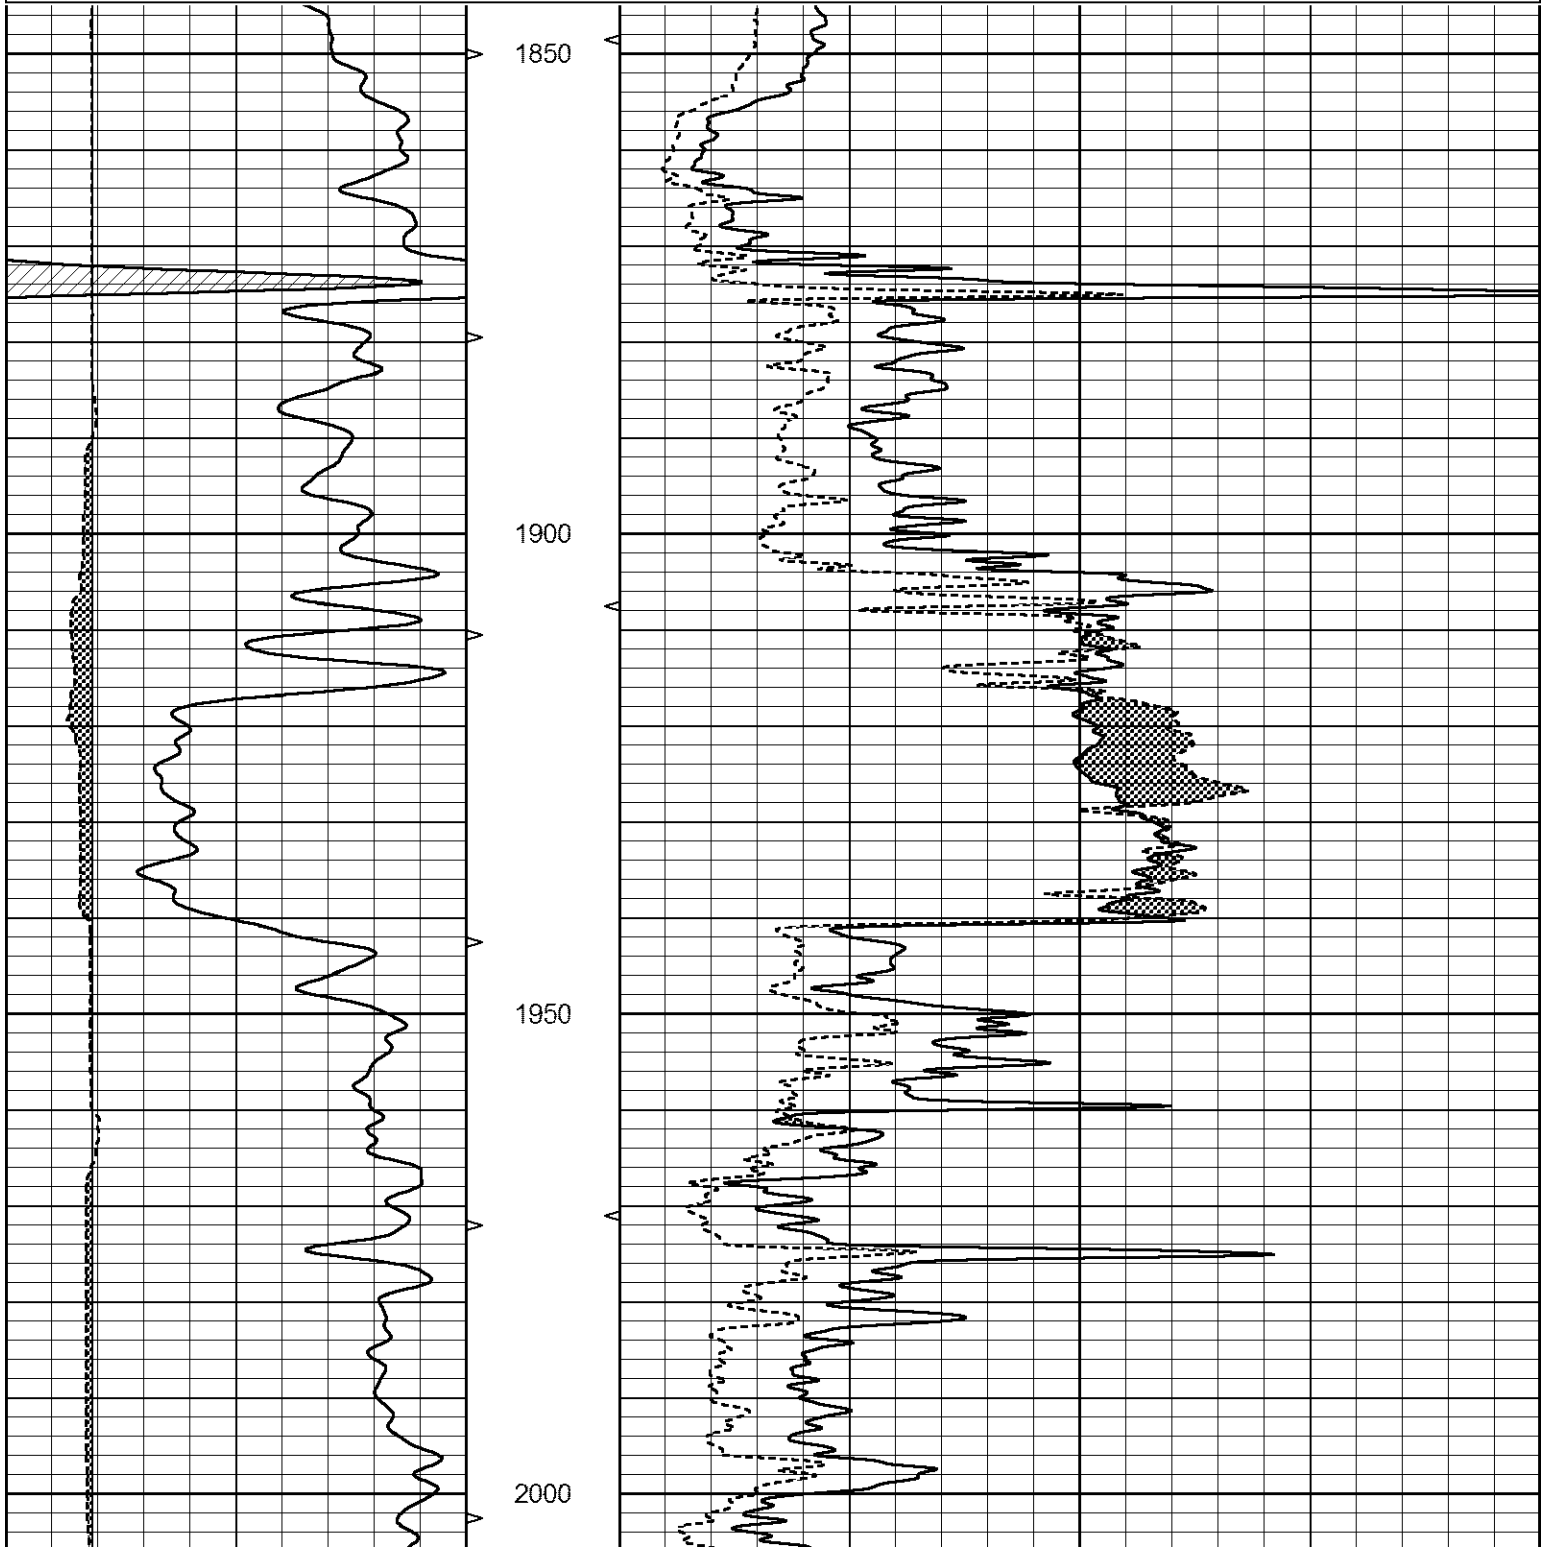

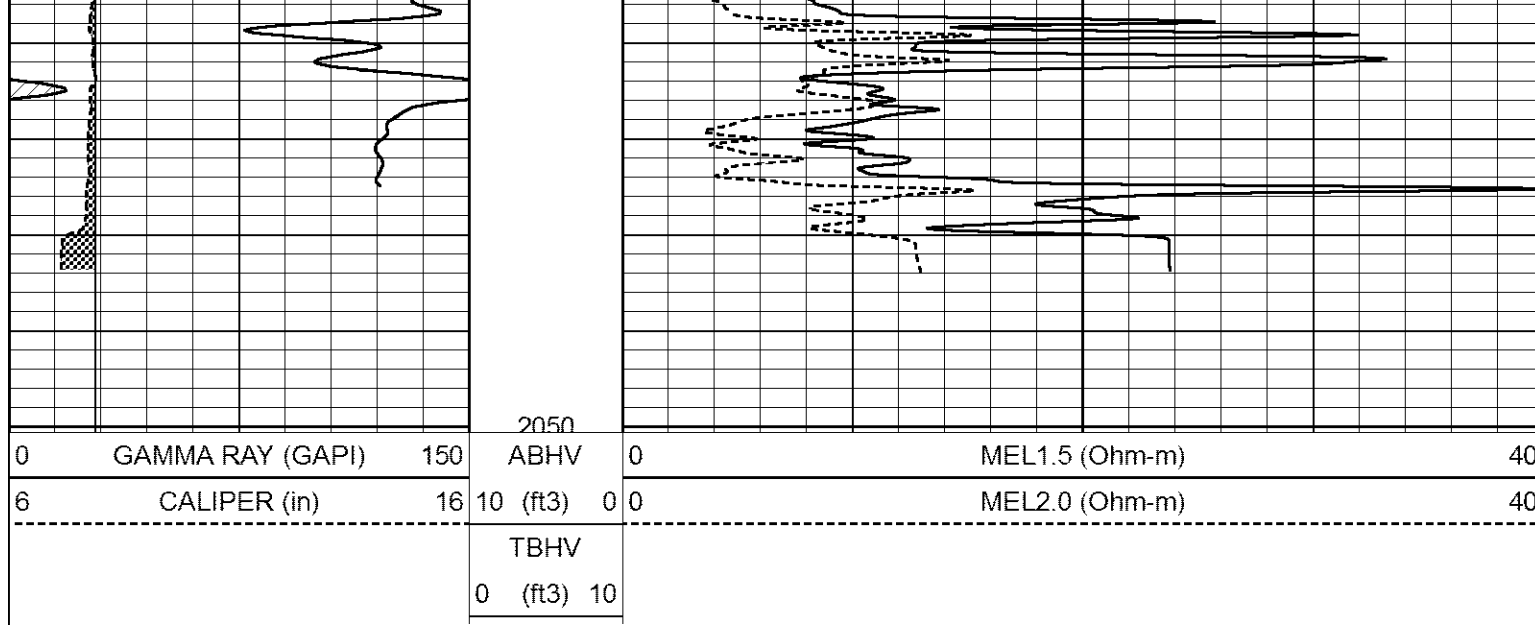

Calibration Report

```
Database File      6543pe.db
Dataset Pathname  pass6.1M
Dataset Creation   Thu Jun 16 19:23:09 2022
```

MICRO USR Calibration Report

Serial Number: 070910
Tool Model: ProbeL
Performed: Tue Jun 07 09:12:25 2022

Caliper Calibration:	Gain=7.212	Offset=2.700
	Low Cal	High Cal
References	8.000	14.000
Readings	0.725	1.557

1.5" Calibration:	Gain=30.000	Offset=-1.500
	Low Cal	High Cal
References	0.000	20.000
Readings	0.004	1.335

2" Calibration:	Gain=38.000	Offset=-0.800
	Low Cal	High Cal
References	0.000	20.000
Readings	0.004	1.029

Microlog Calibration Report

Serial-Model: 070910-ProbeL
Performed: (Not Performed)

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Inverse	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000

Gamma Ray Calibration Report

Serial Number: 070558
Tool Model: Probe1

Performed:	Tue May 17 15:23:49 2022	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2600	GAPI/cps