

MICRO LOG

Company	PHILLIPS EXPLORATION CO. L.C.	Company	PHILLIPS EXPLORATION COMPANY, L.C.
Well	ERIC LITTLECHILD #1-34	Well	ERIC LITTLECHILD #1-34
Field	MARY HANNA	Field	MARY HANNA
County	GRAHAM	County	GRAHAM
State	KANSAS	State	KANSAS
Location:	API # : 15-065-24322-0000 1700' FSL & 1100' FWL NE - SE - NW - SW	Other Services CDL/CNL DIL	
Permanent Datum	GROUND LEVEL	Elevation	2325
Log Measured From	KELLY BUSHING 5' A.G.L.	K.B. 2330 D.F. 2328 G.L. 2325	
Drilling Measured From	KELLY BUSHING		
Date	10/3/24		
Run Number	TWO		
Depth Driller	4000		
Depth Logger	4000		
Bottom Logged Interval	3998		
Top Log Interval	1800		
Casing Driller	8.625@220		
Casing Logger	220		
Bit Size	7.785		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 5.000 PPM	
Density / Viscosity	9.1/58		
pH / Fluid Loss	10.5/6.4		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.750@89F		
Rmf @ Meas. Temp	.563@89F		
Rmc @ Meas. Temp	.900@89F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.575@116F		
Time Circulation Stopped	4 HOURS		
Time Logger on Bottom	5.45 P.M.		
Maximum Recorded Temperature	116F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	BLAKE MILLER		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-065-24322-0000

Comments

THANK YOU FOR USING ELI WIRELINE HAYS. KANSAS (785) 628-6395
DIRECTIONS


WAKEENEY, KS., (I-70 & HWY 283) 8N. OM HWY 283 TO "RD. B", 6W. TO "RD. 200", 1N., 1/2W. TO
CURVE, N. TO FARM DRIVE, W. INTO PAST SHED






MAIN SECTION

Database File	8954ddn.db
Dataset Pathname	pass7.6
Presentation Format	micro
Dataset Creation	Thu Oct 03 19:35:37 2024
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3)	10		

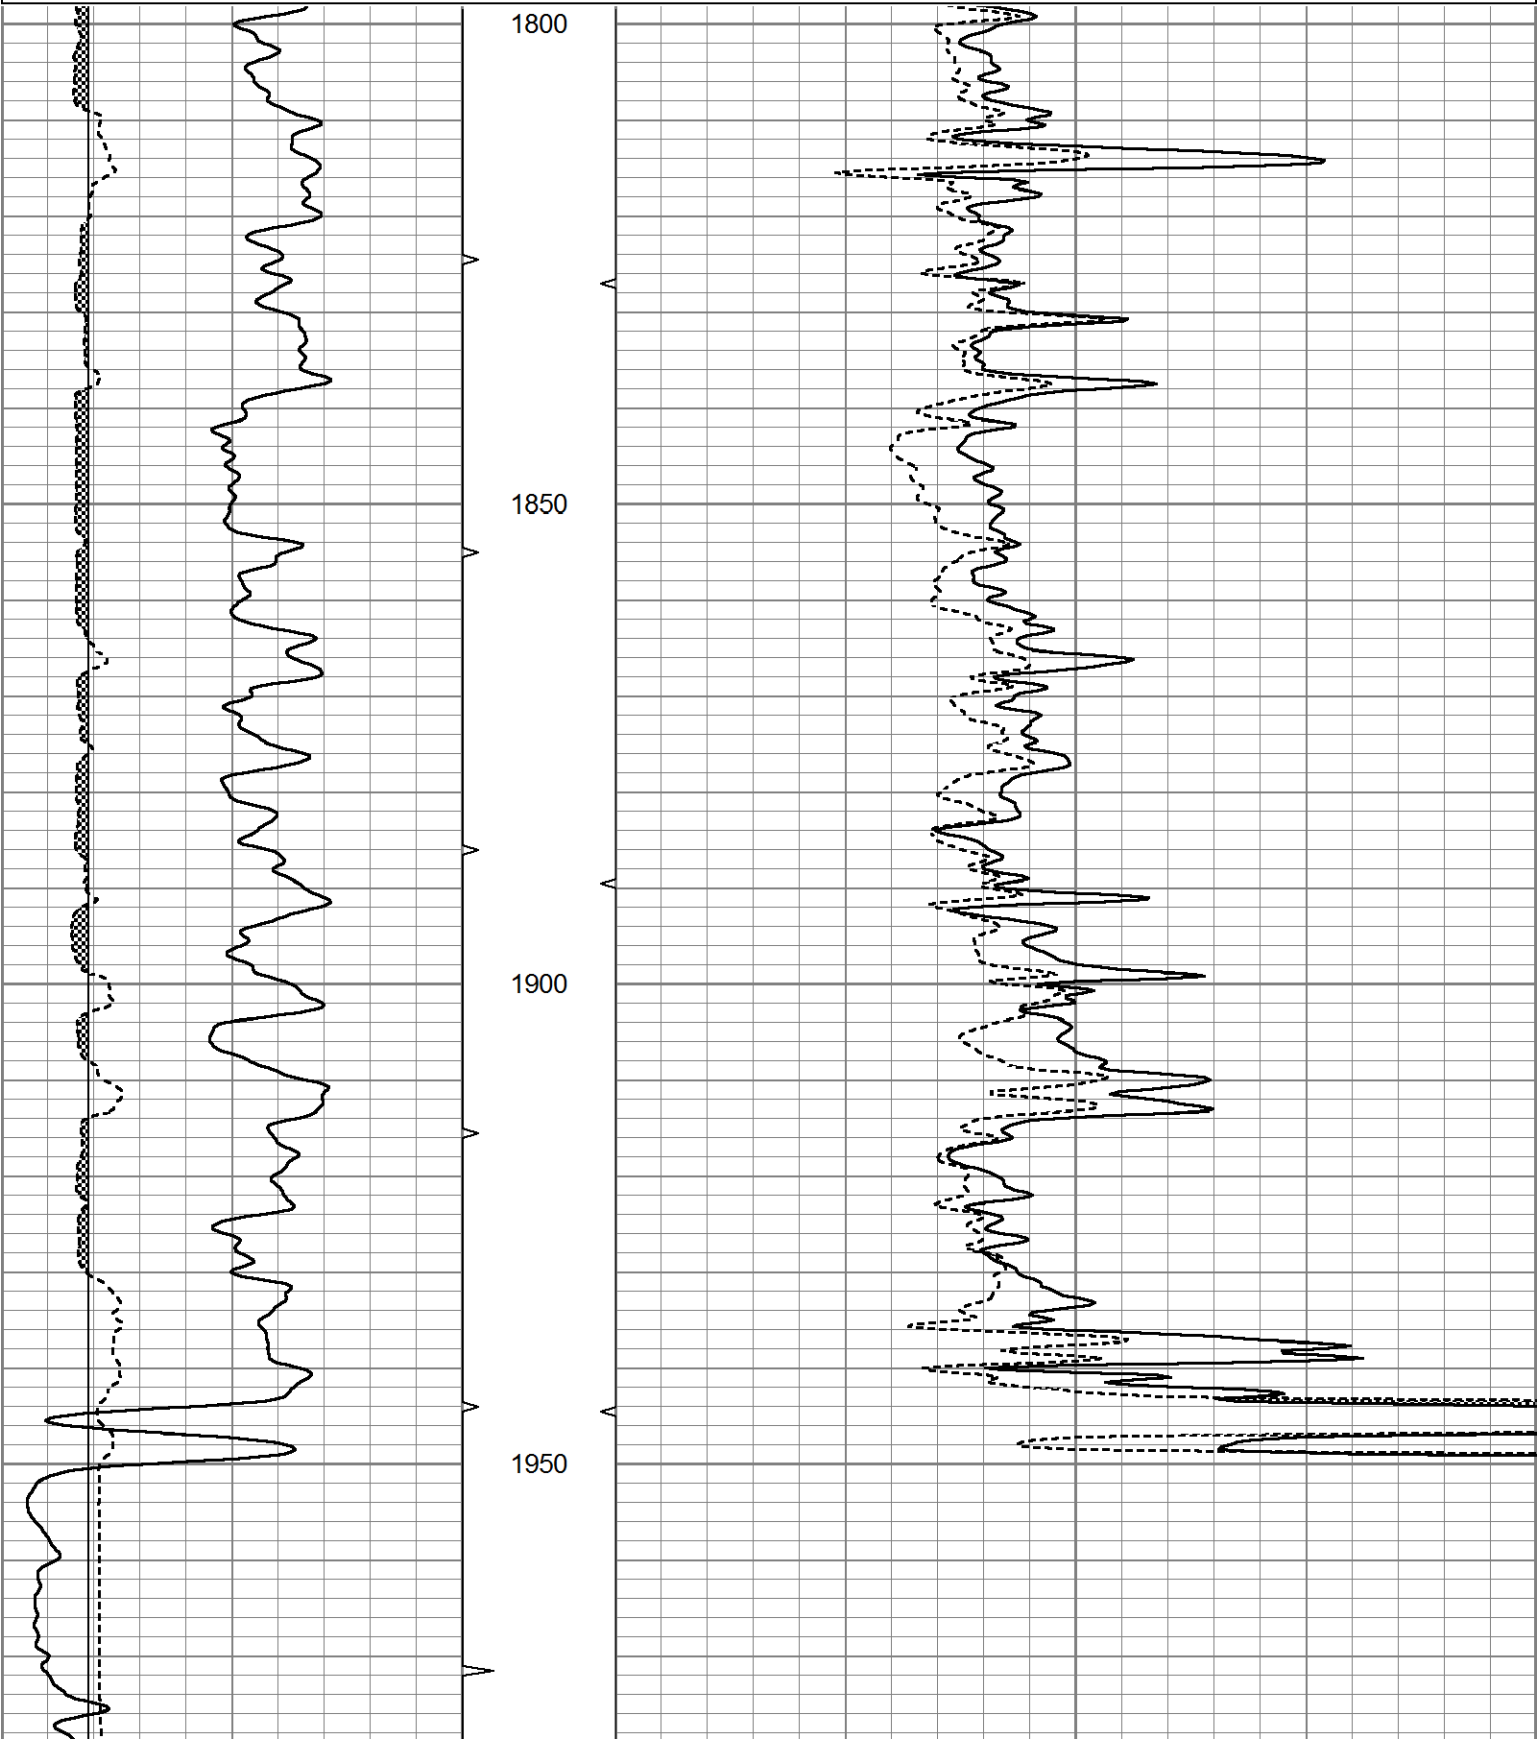

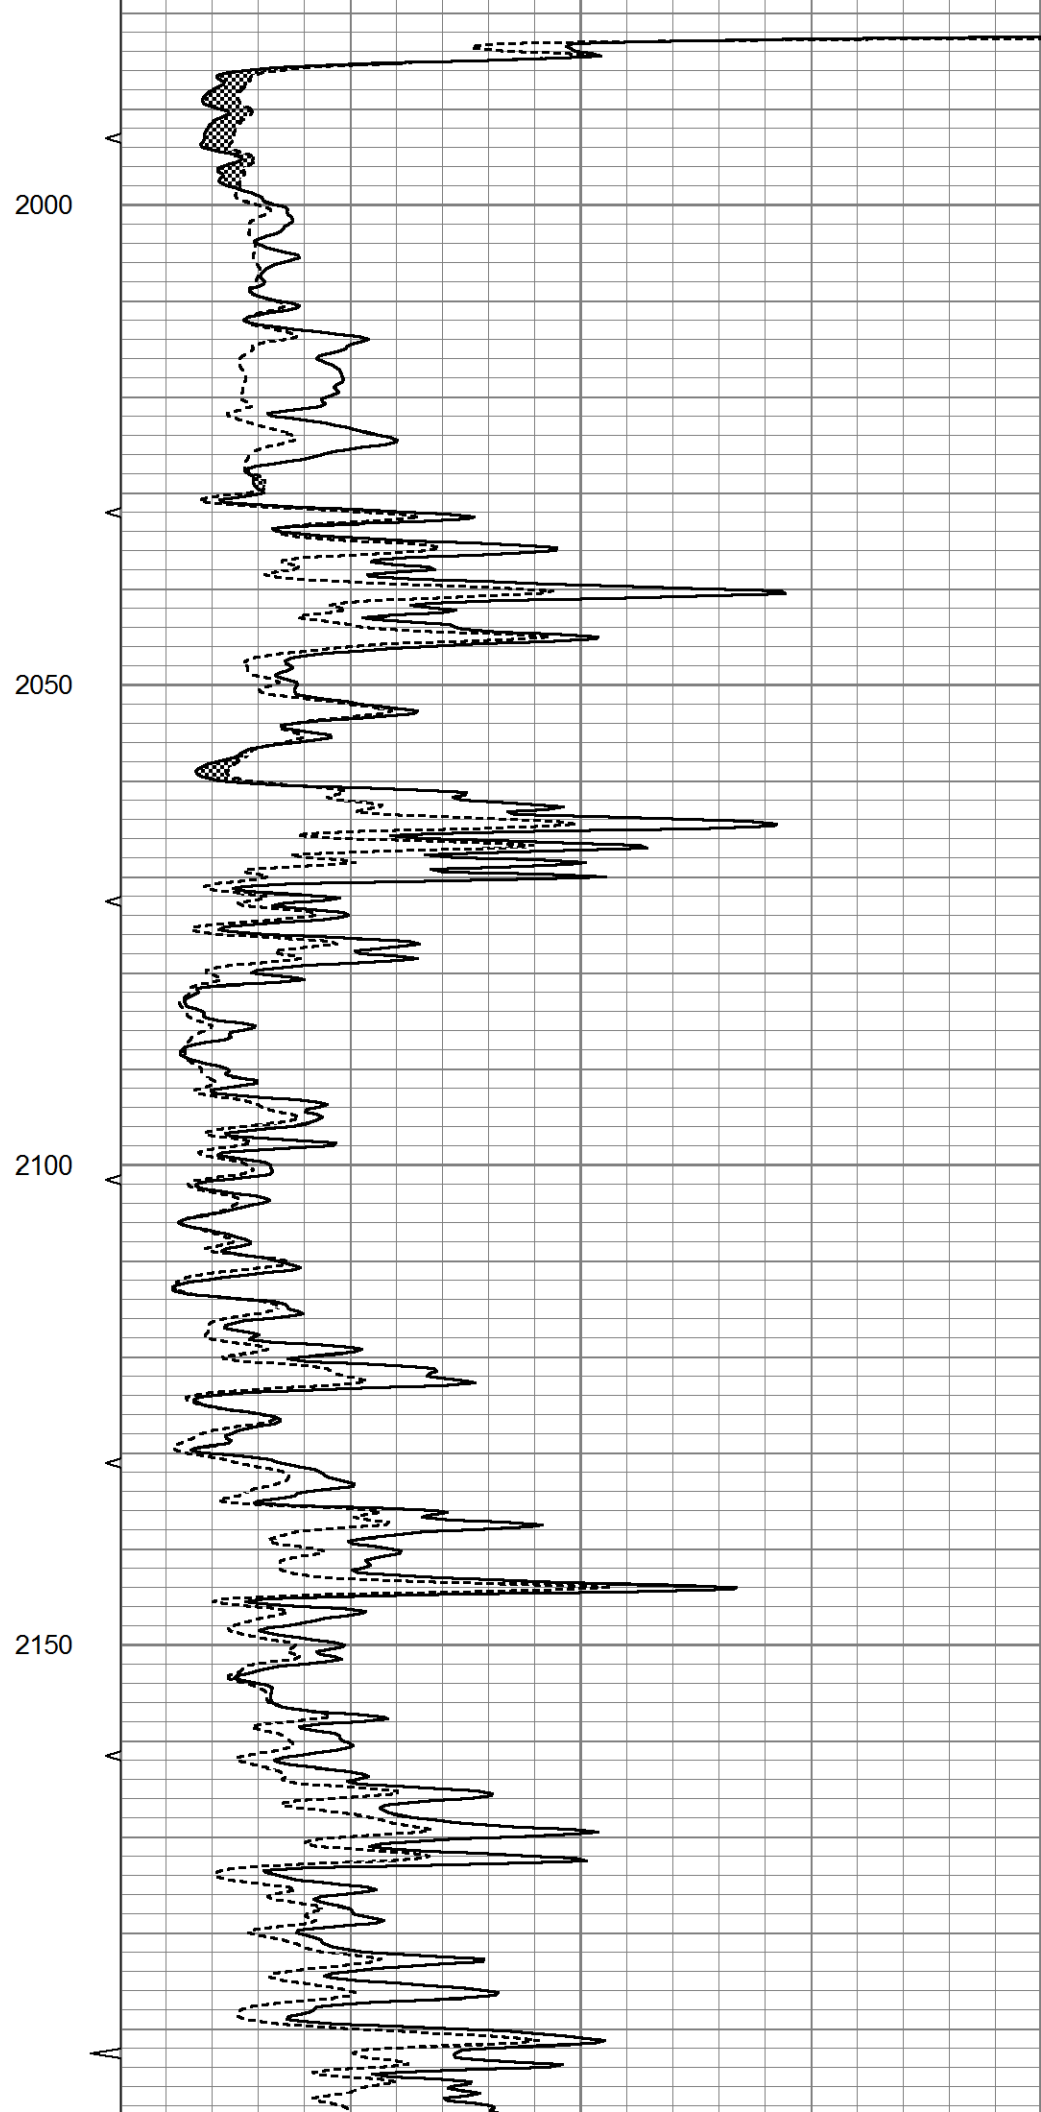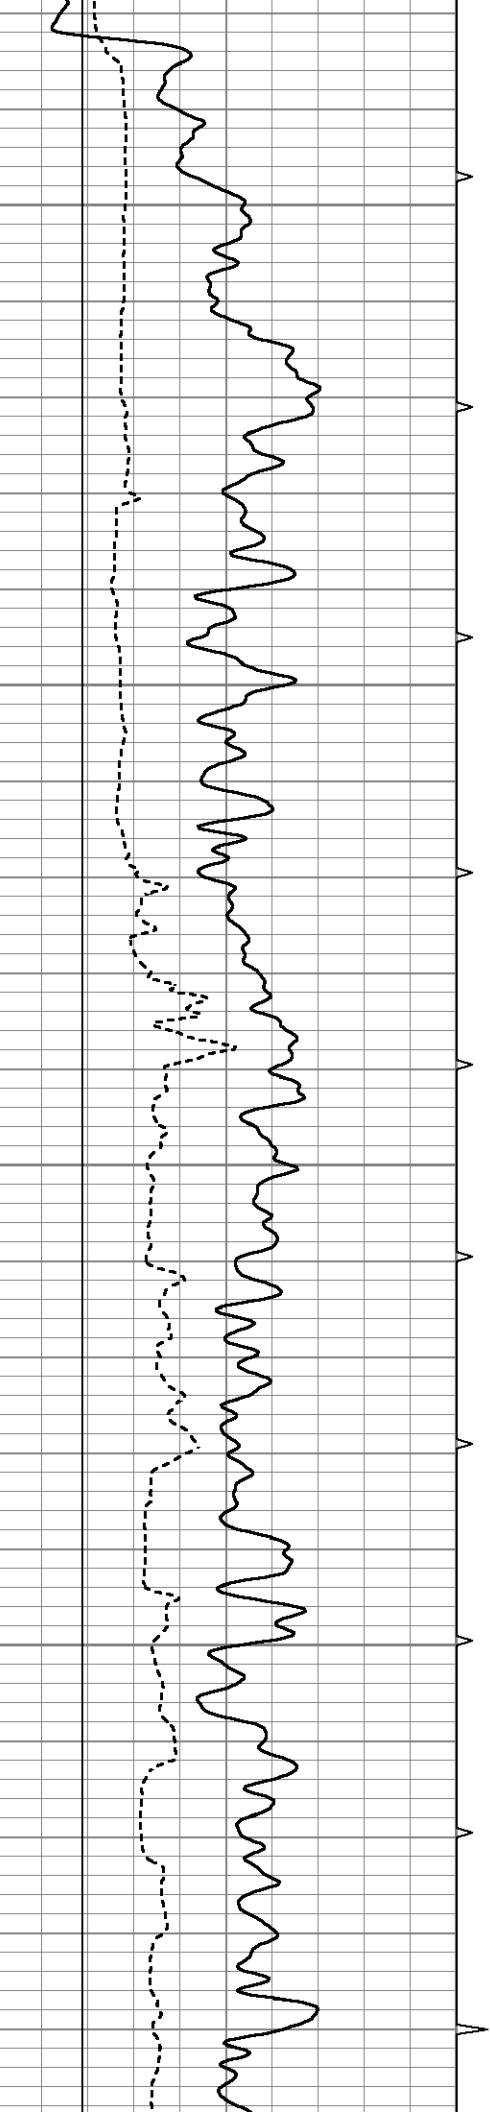

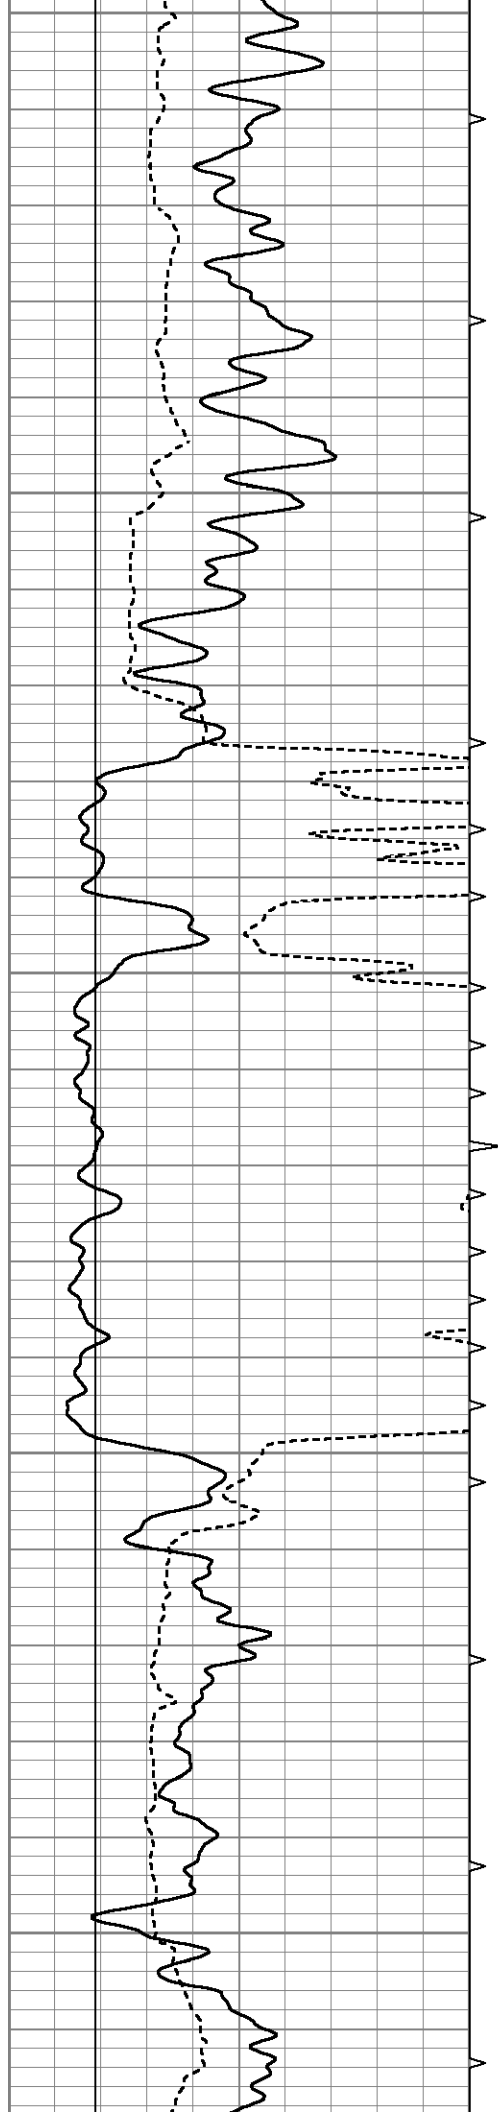


2200


2250



2300


2350


2400

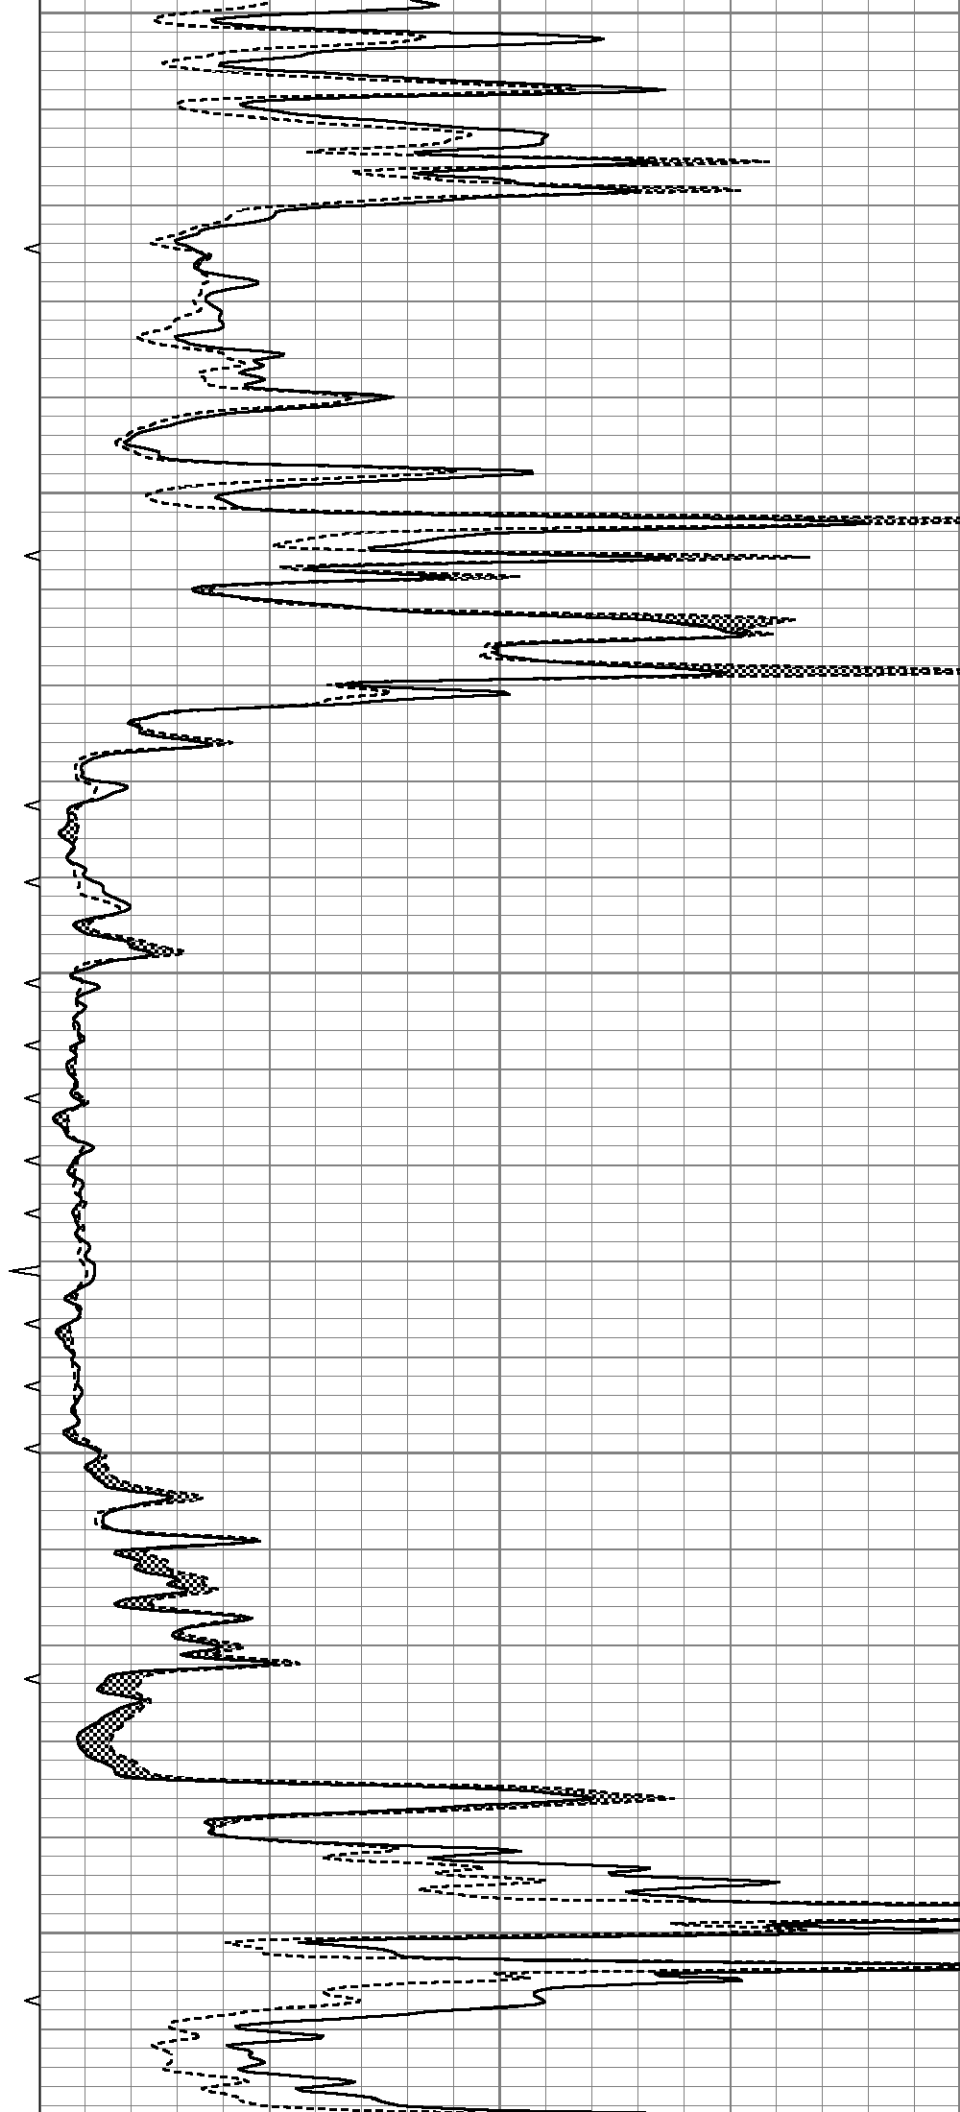


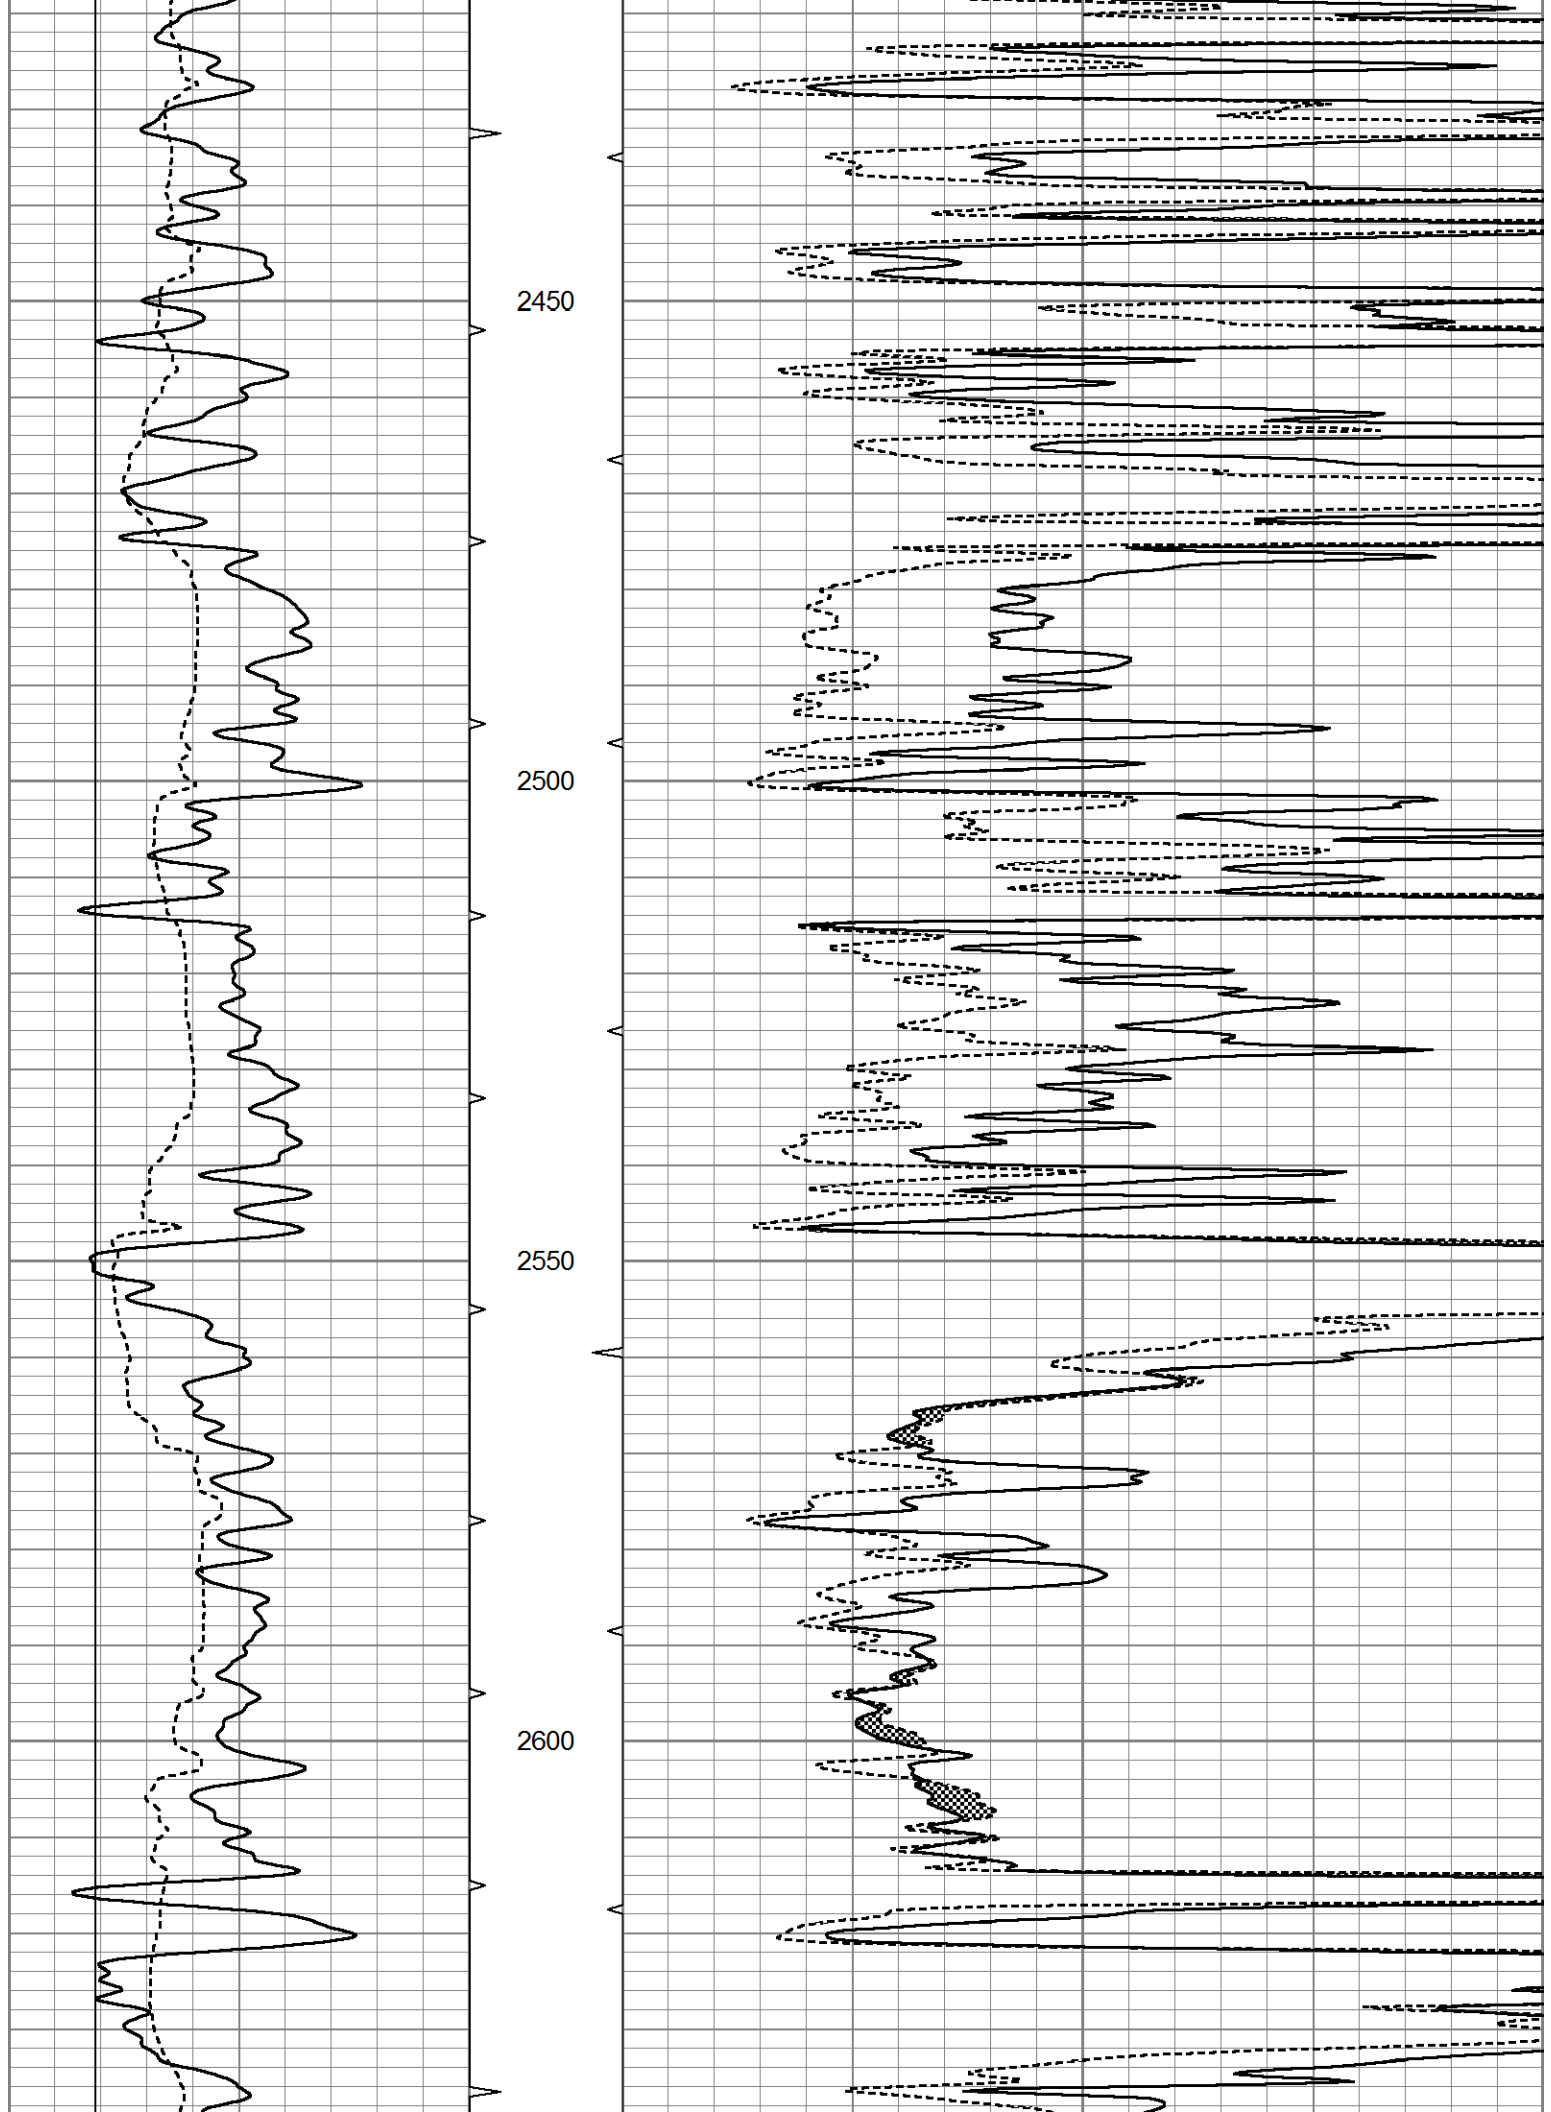

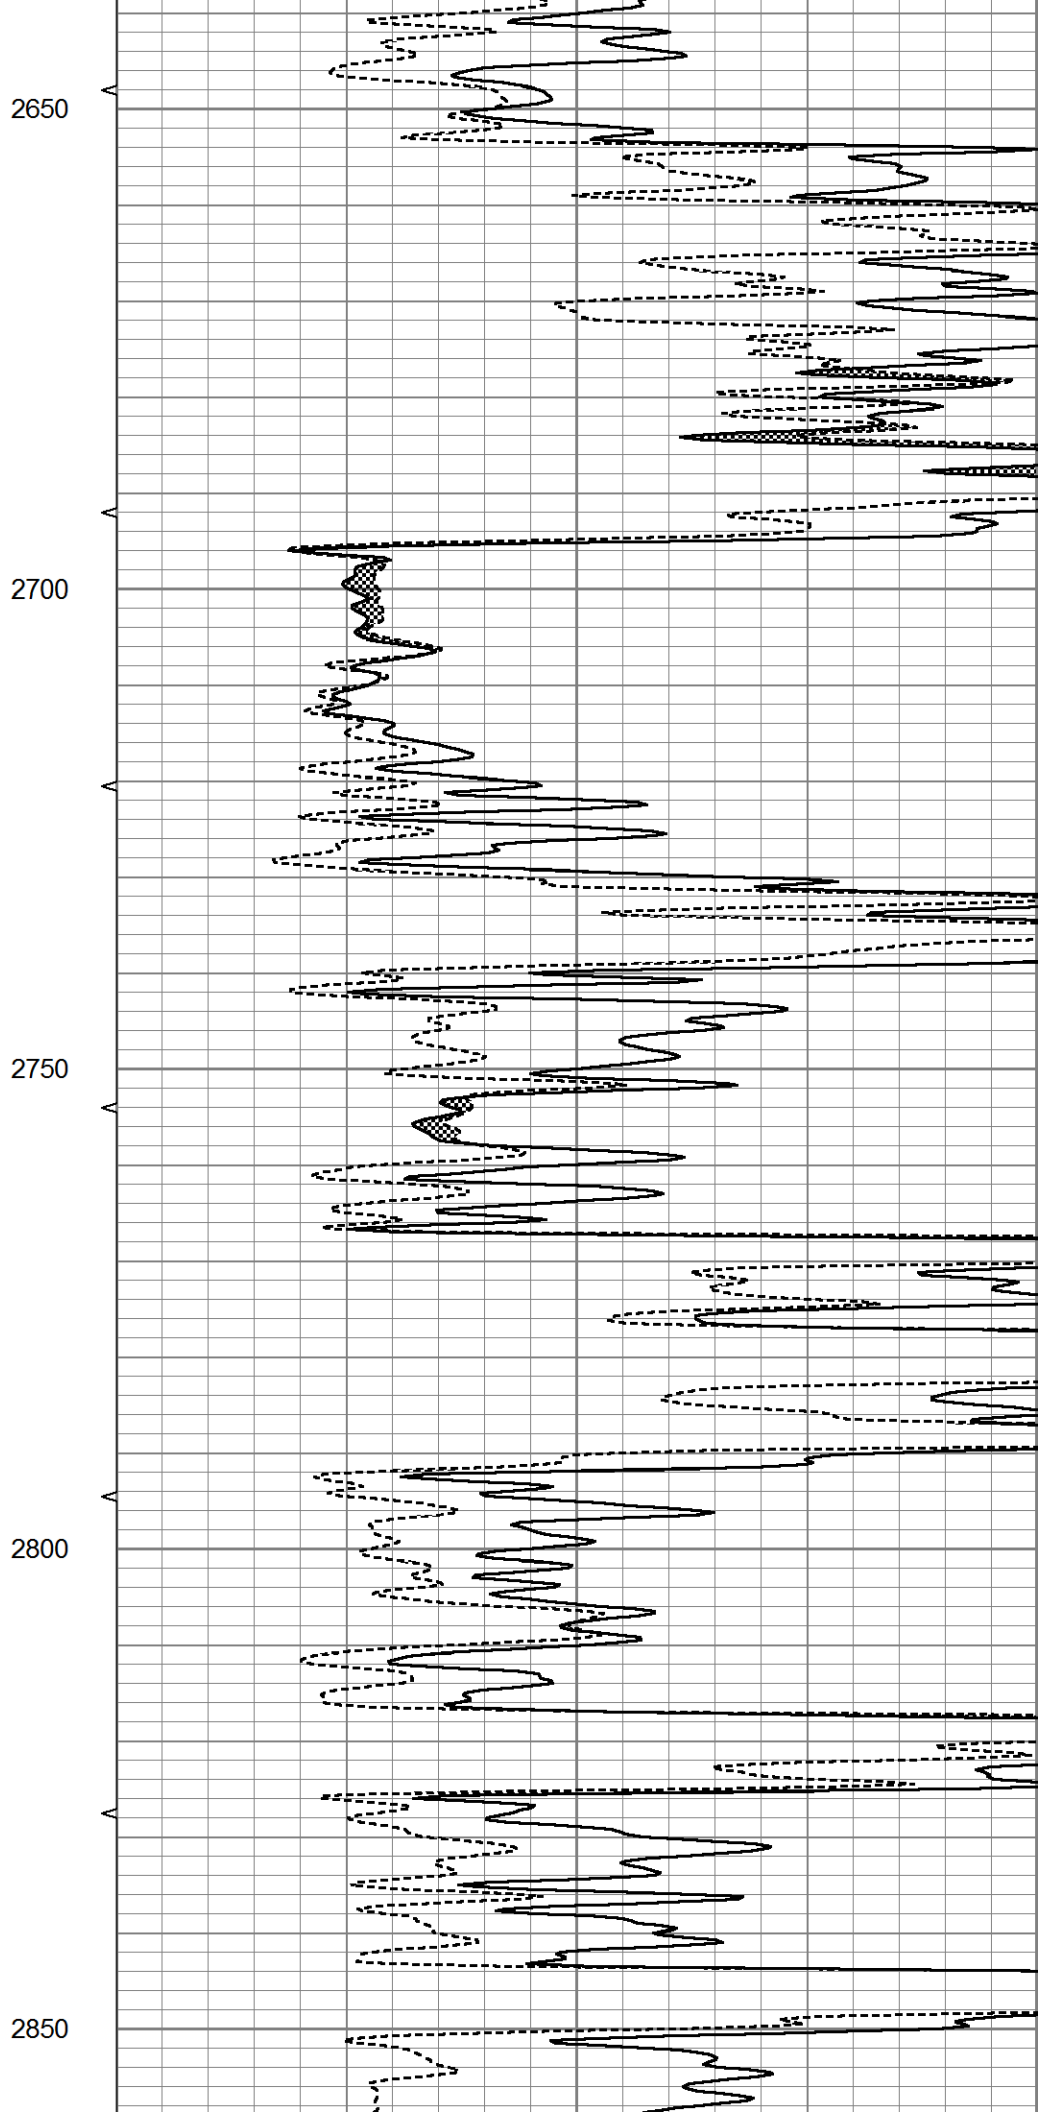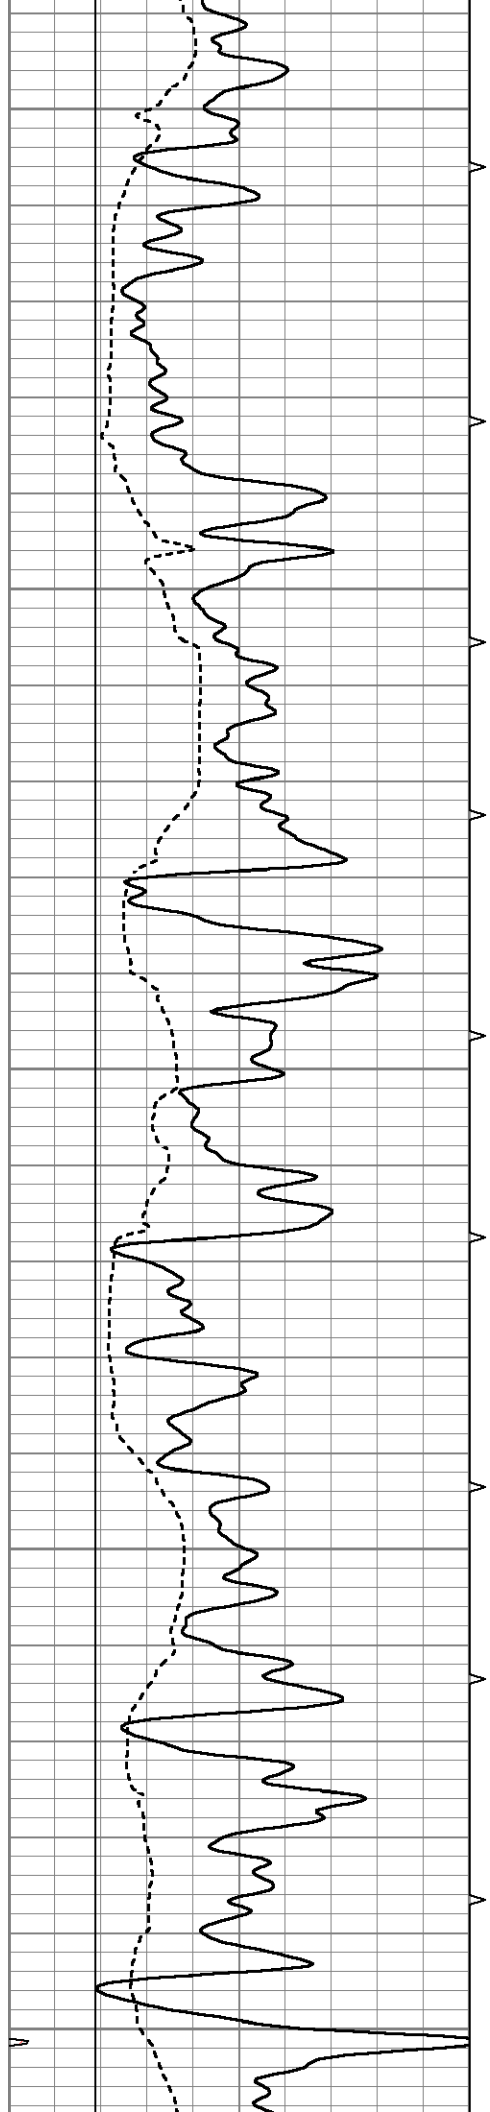

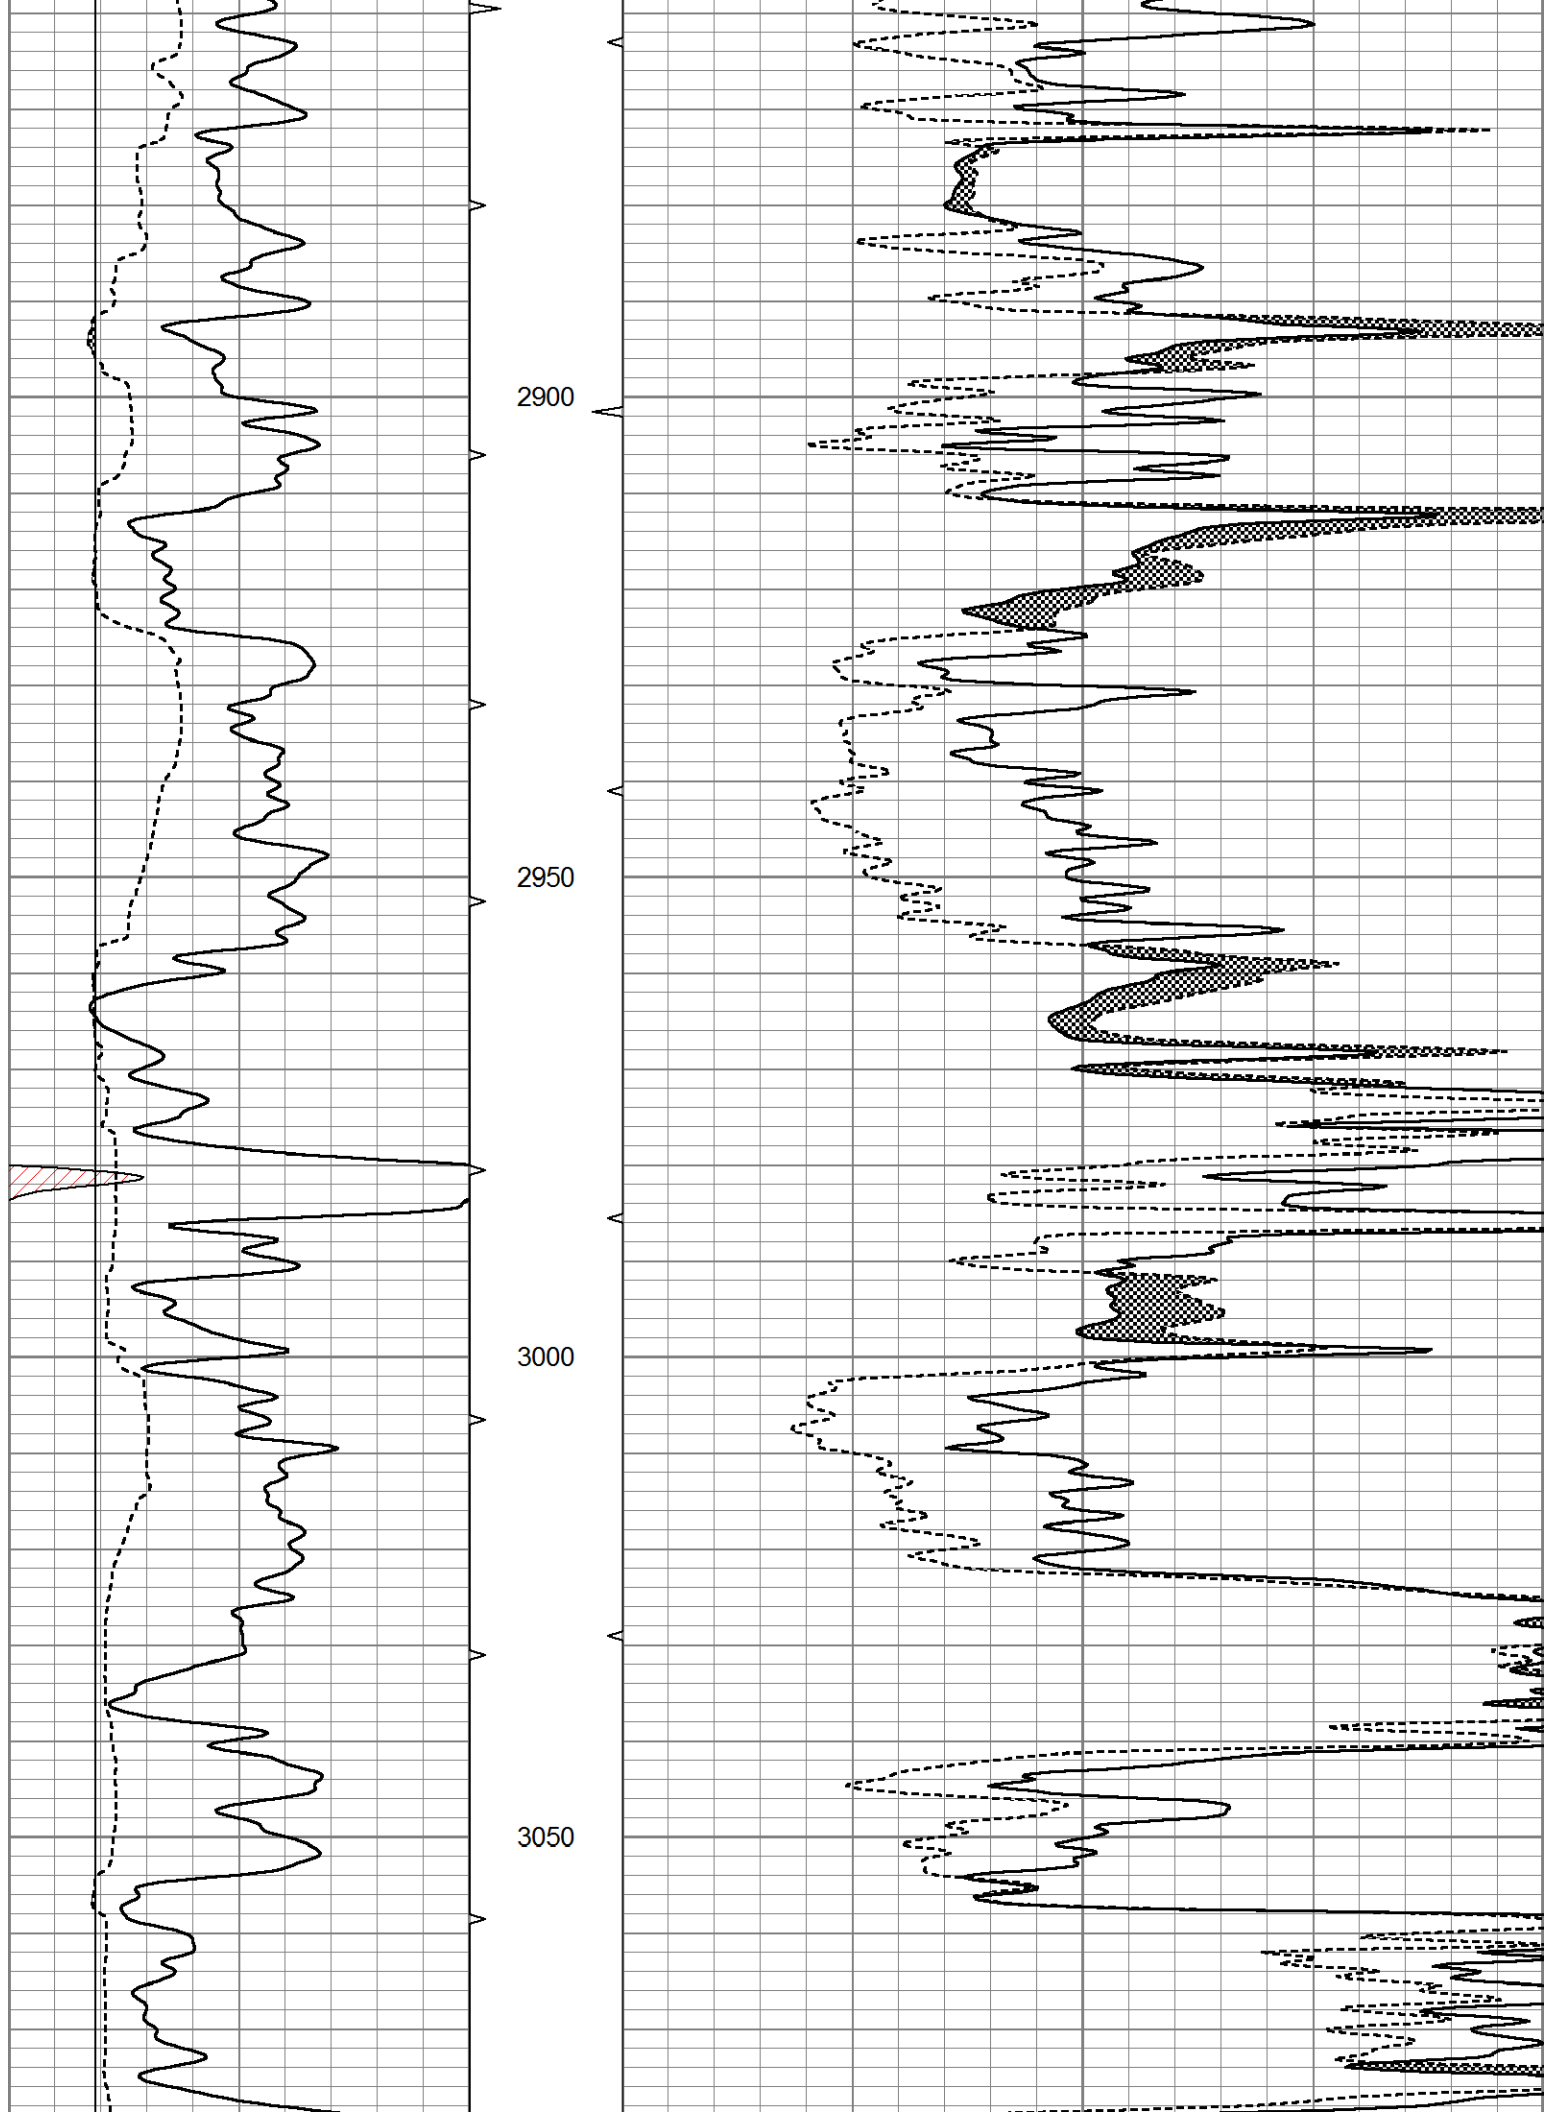

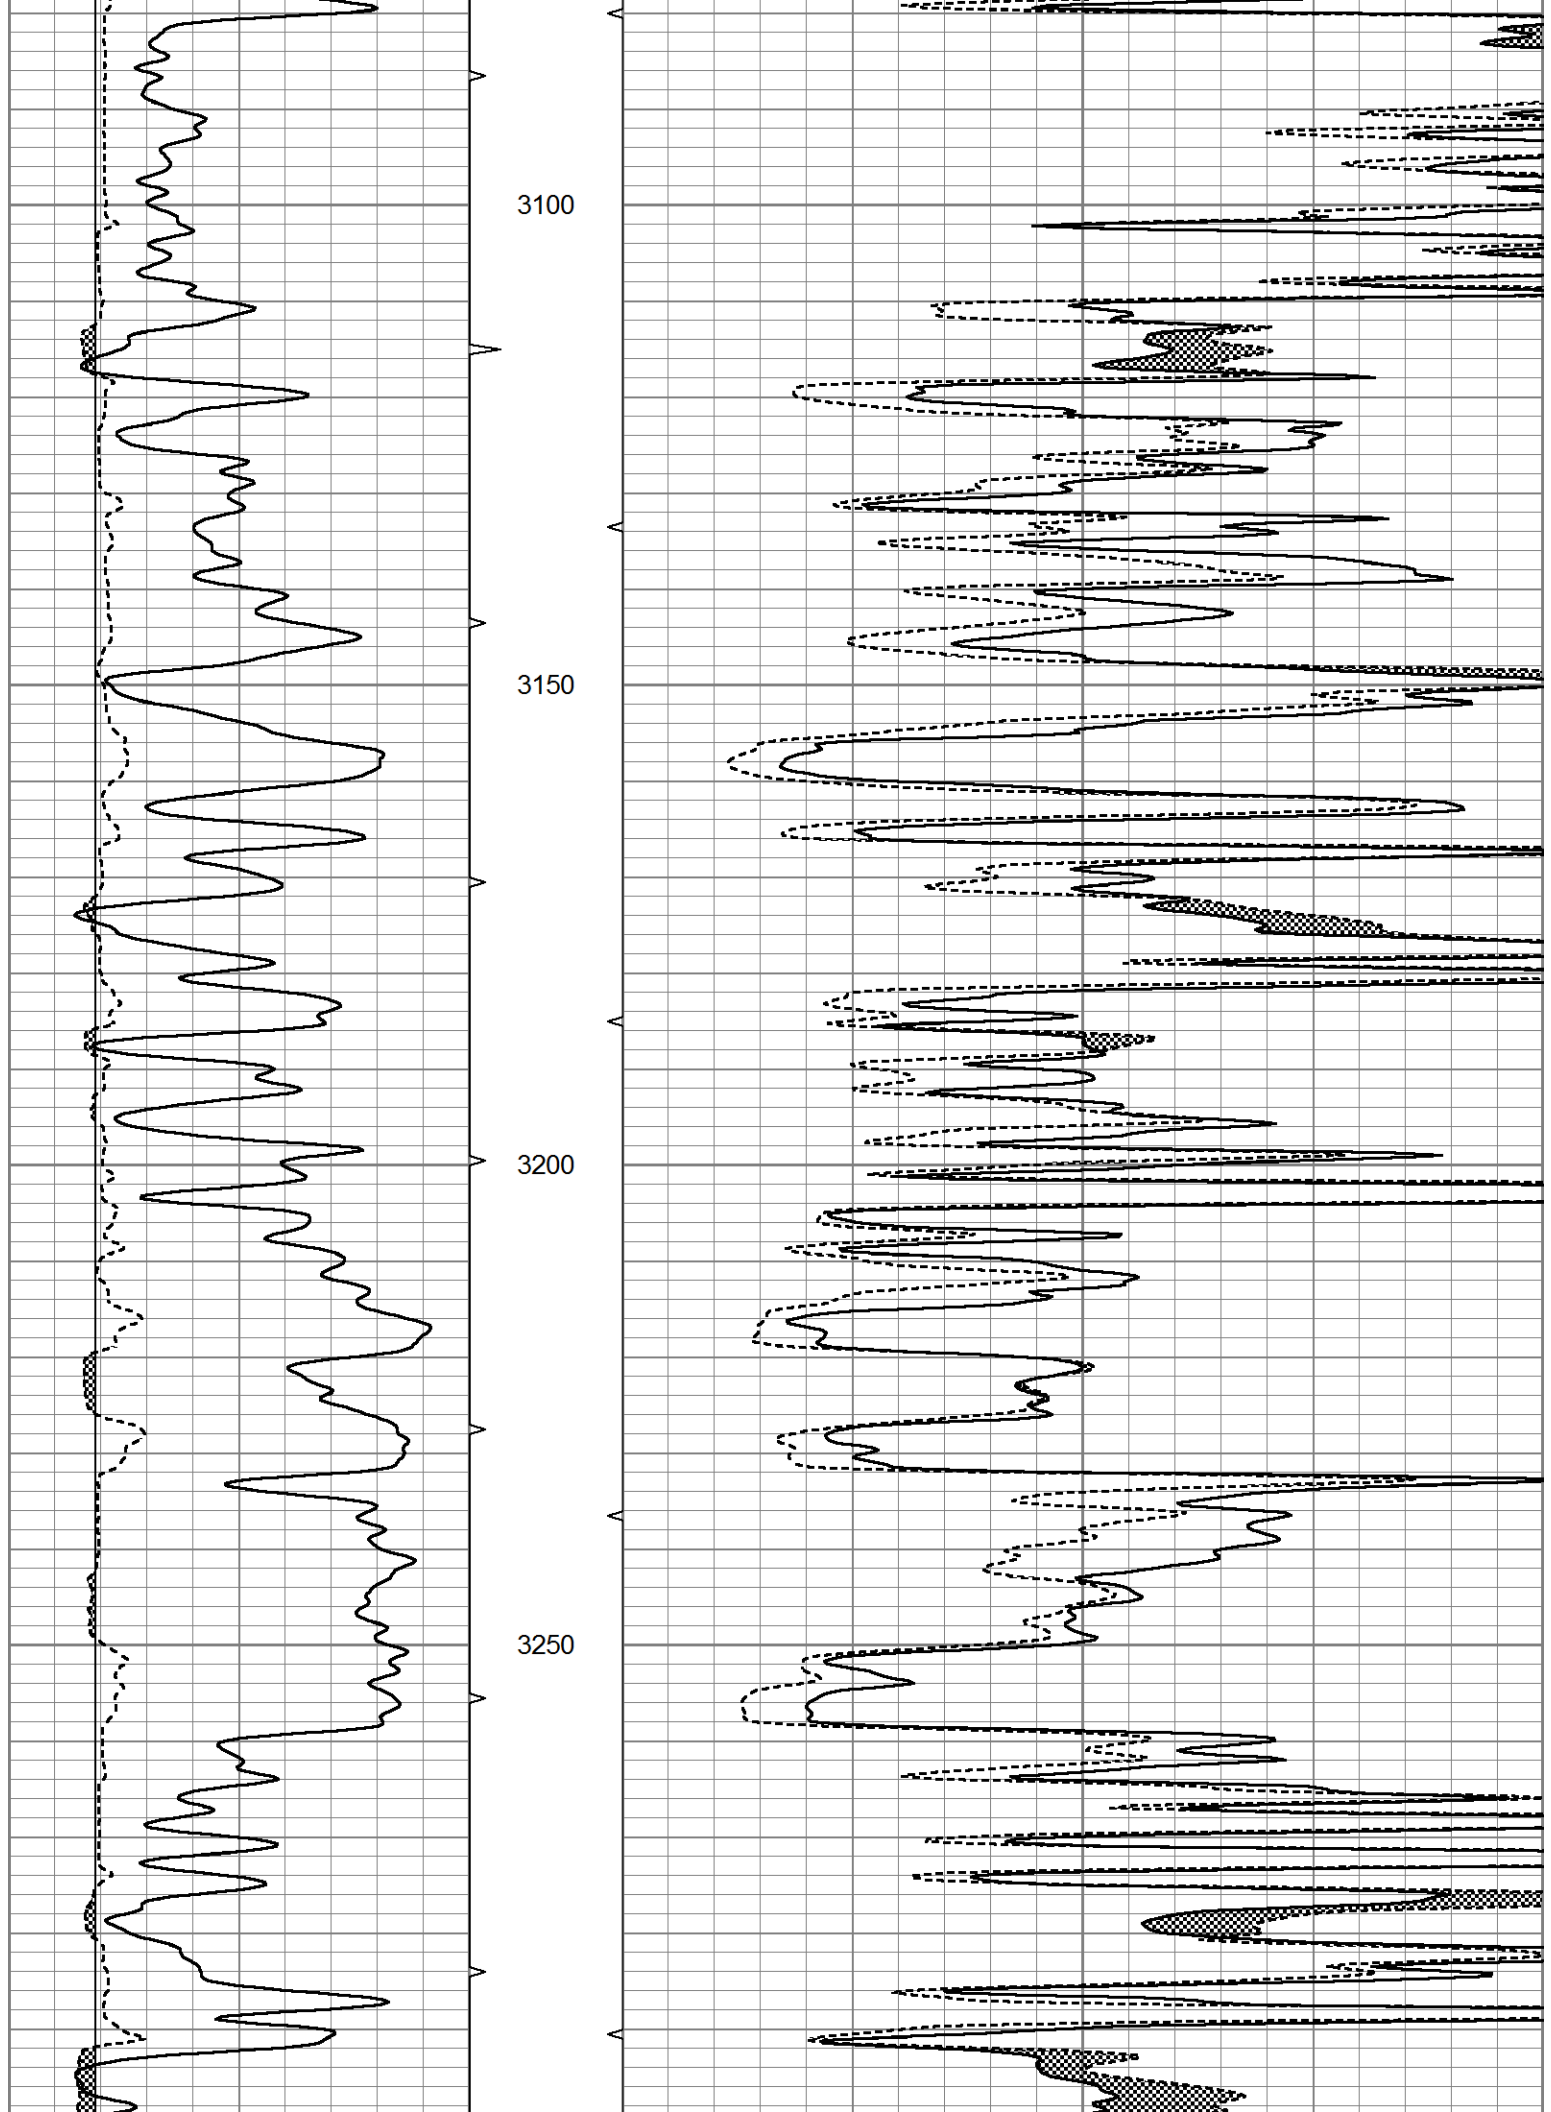

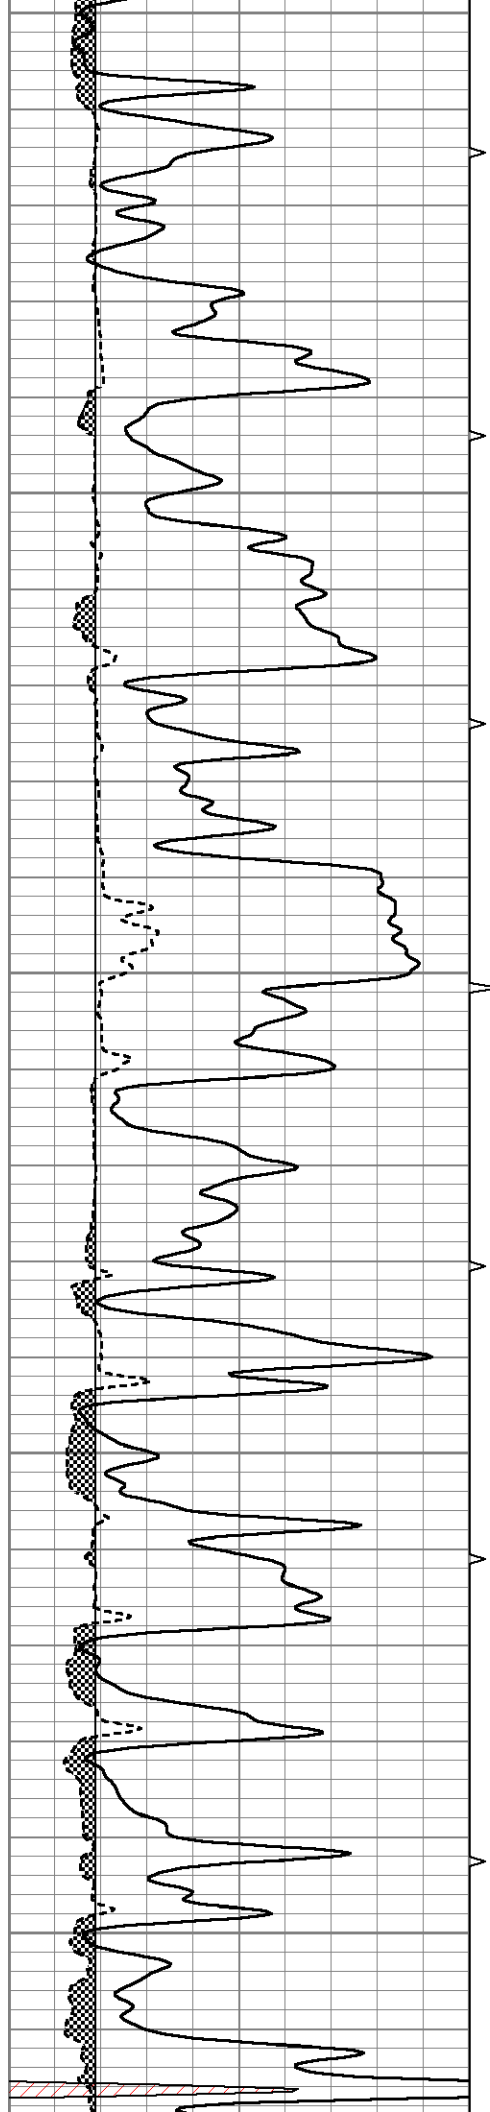


3300


3350


3400


3450

3500

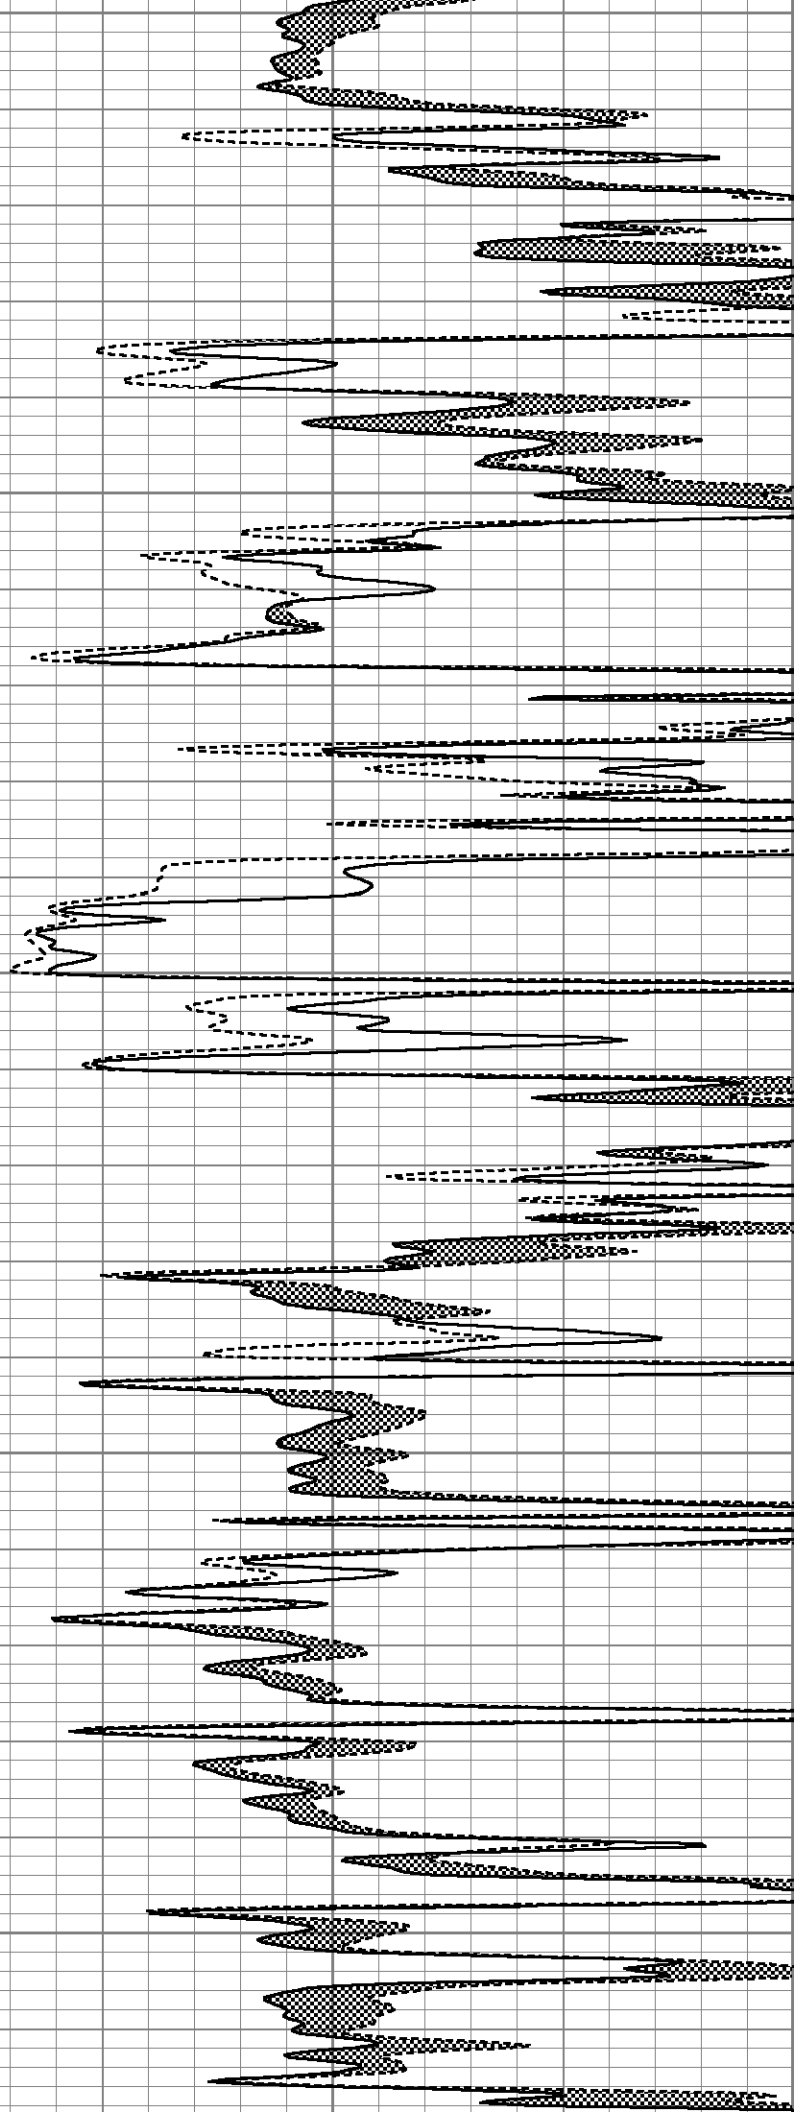

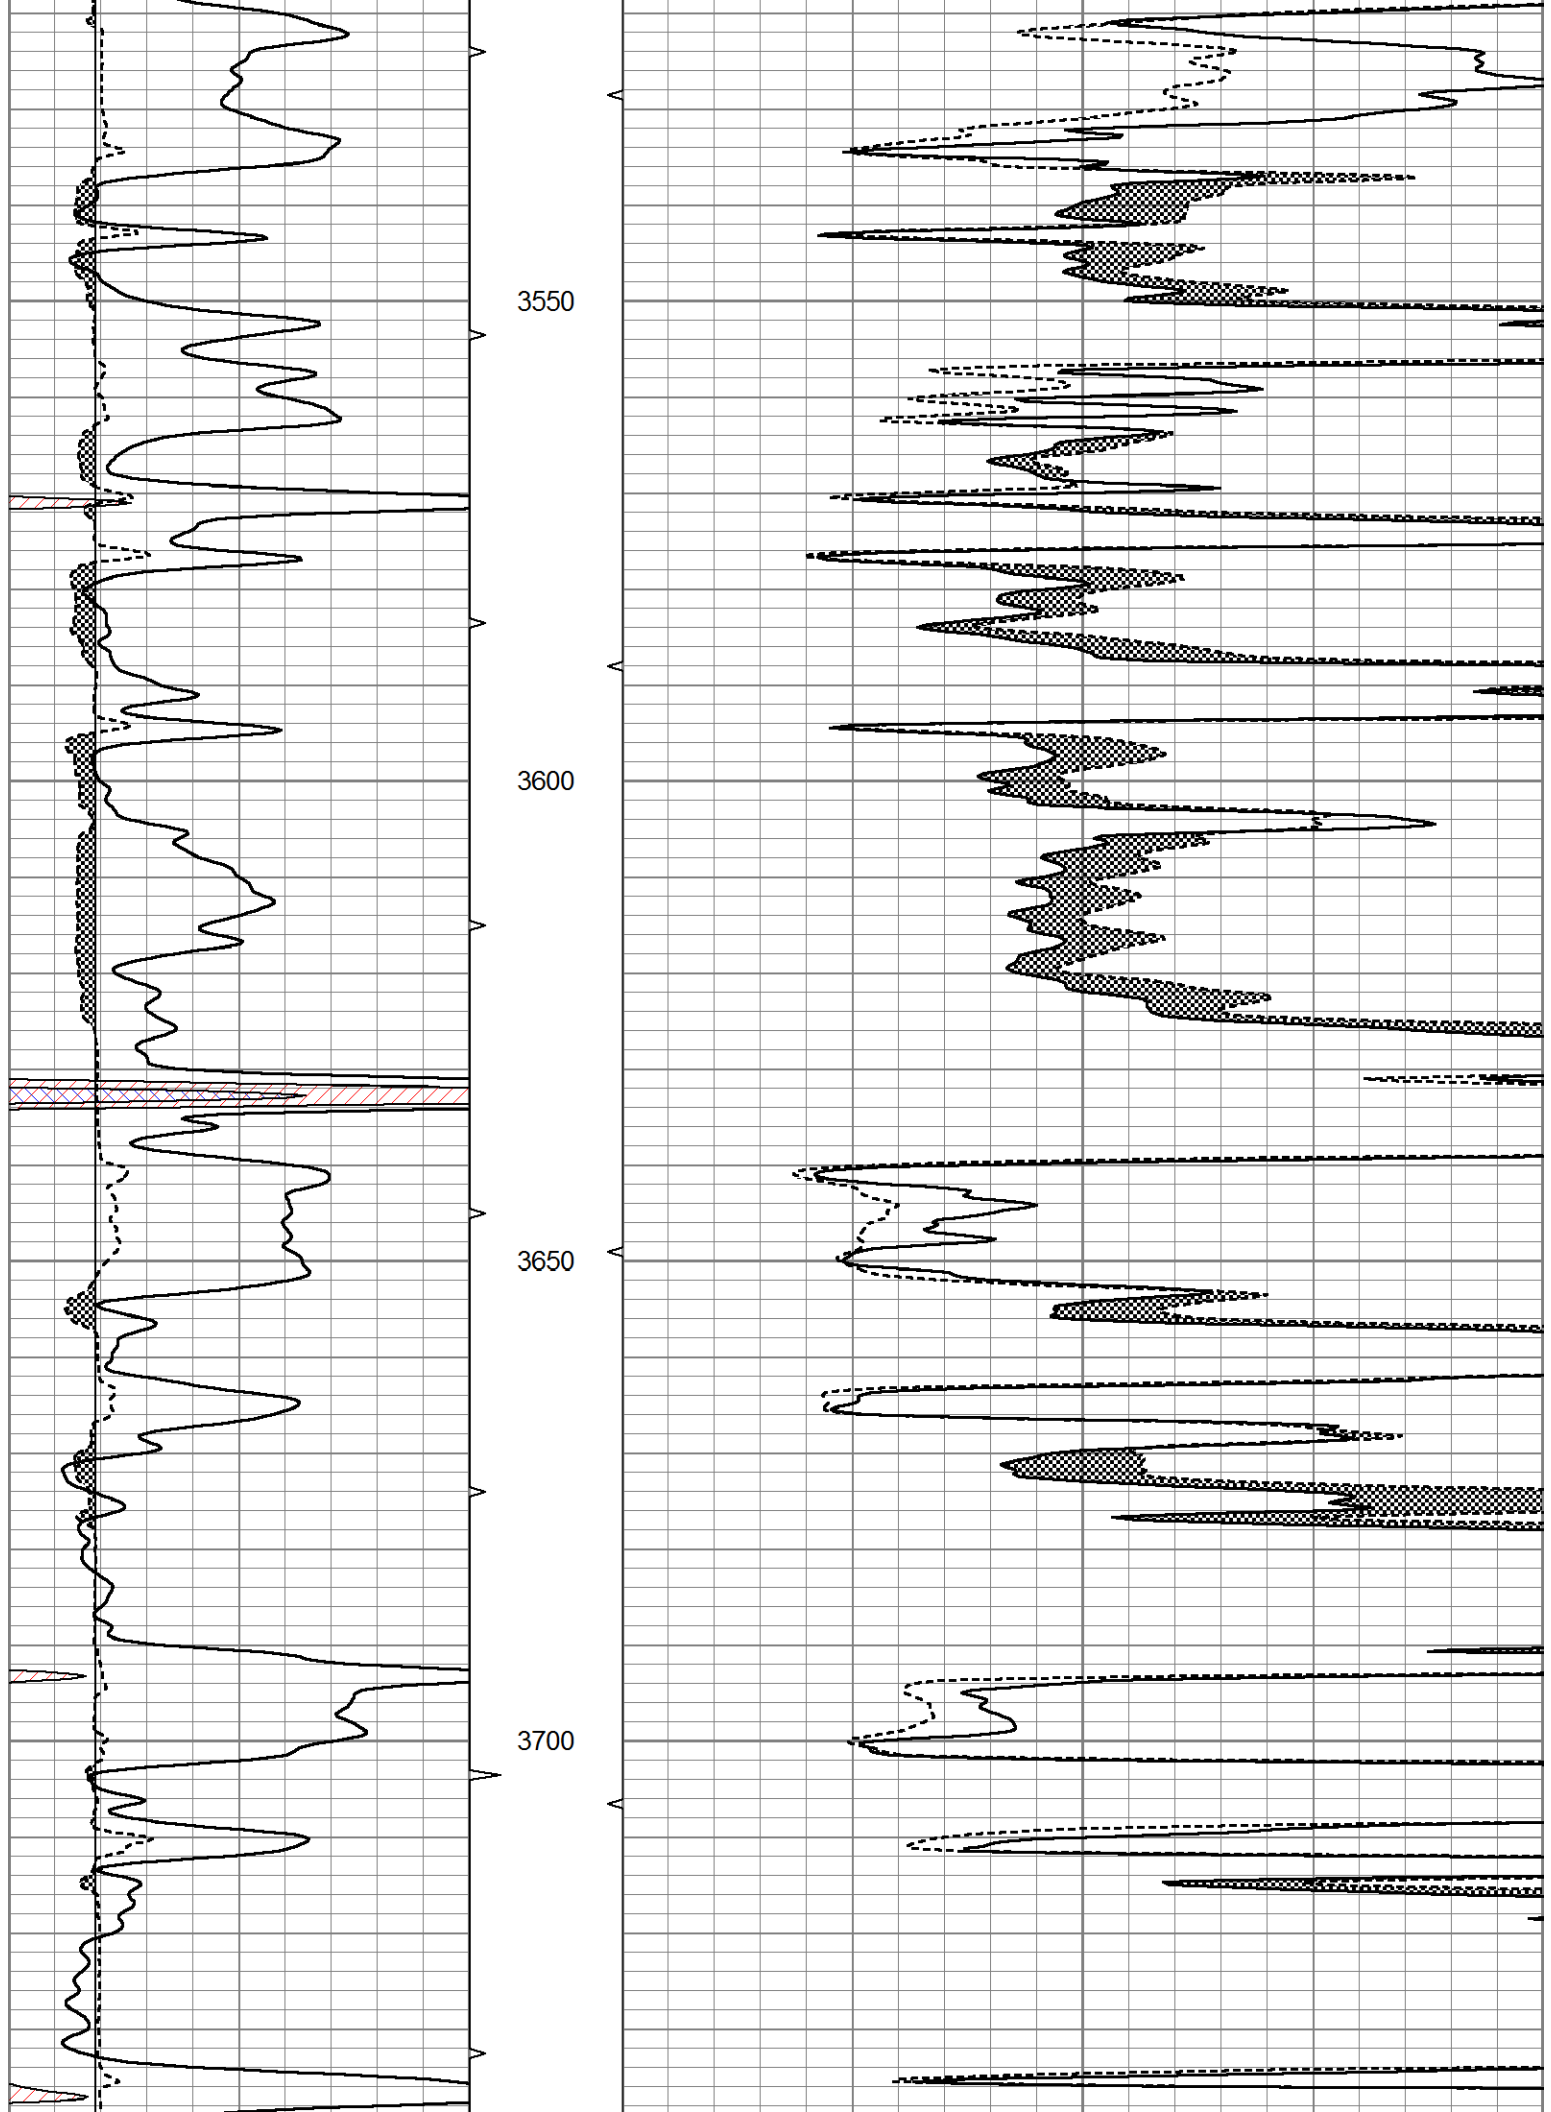

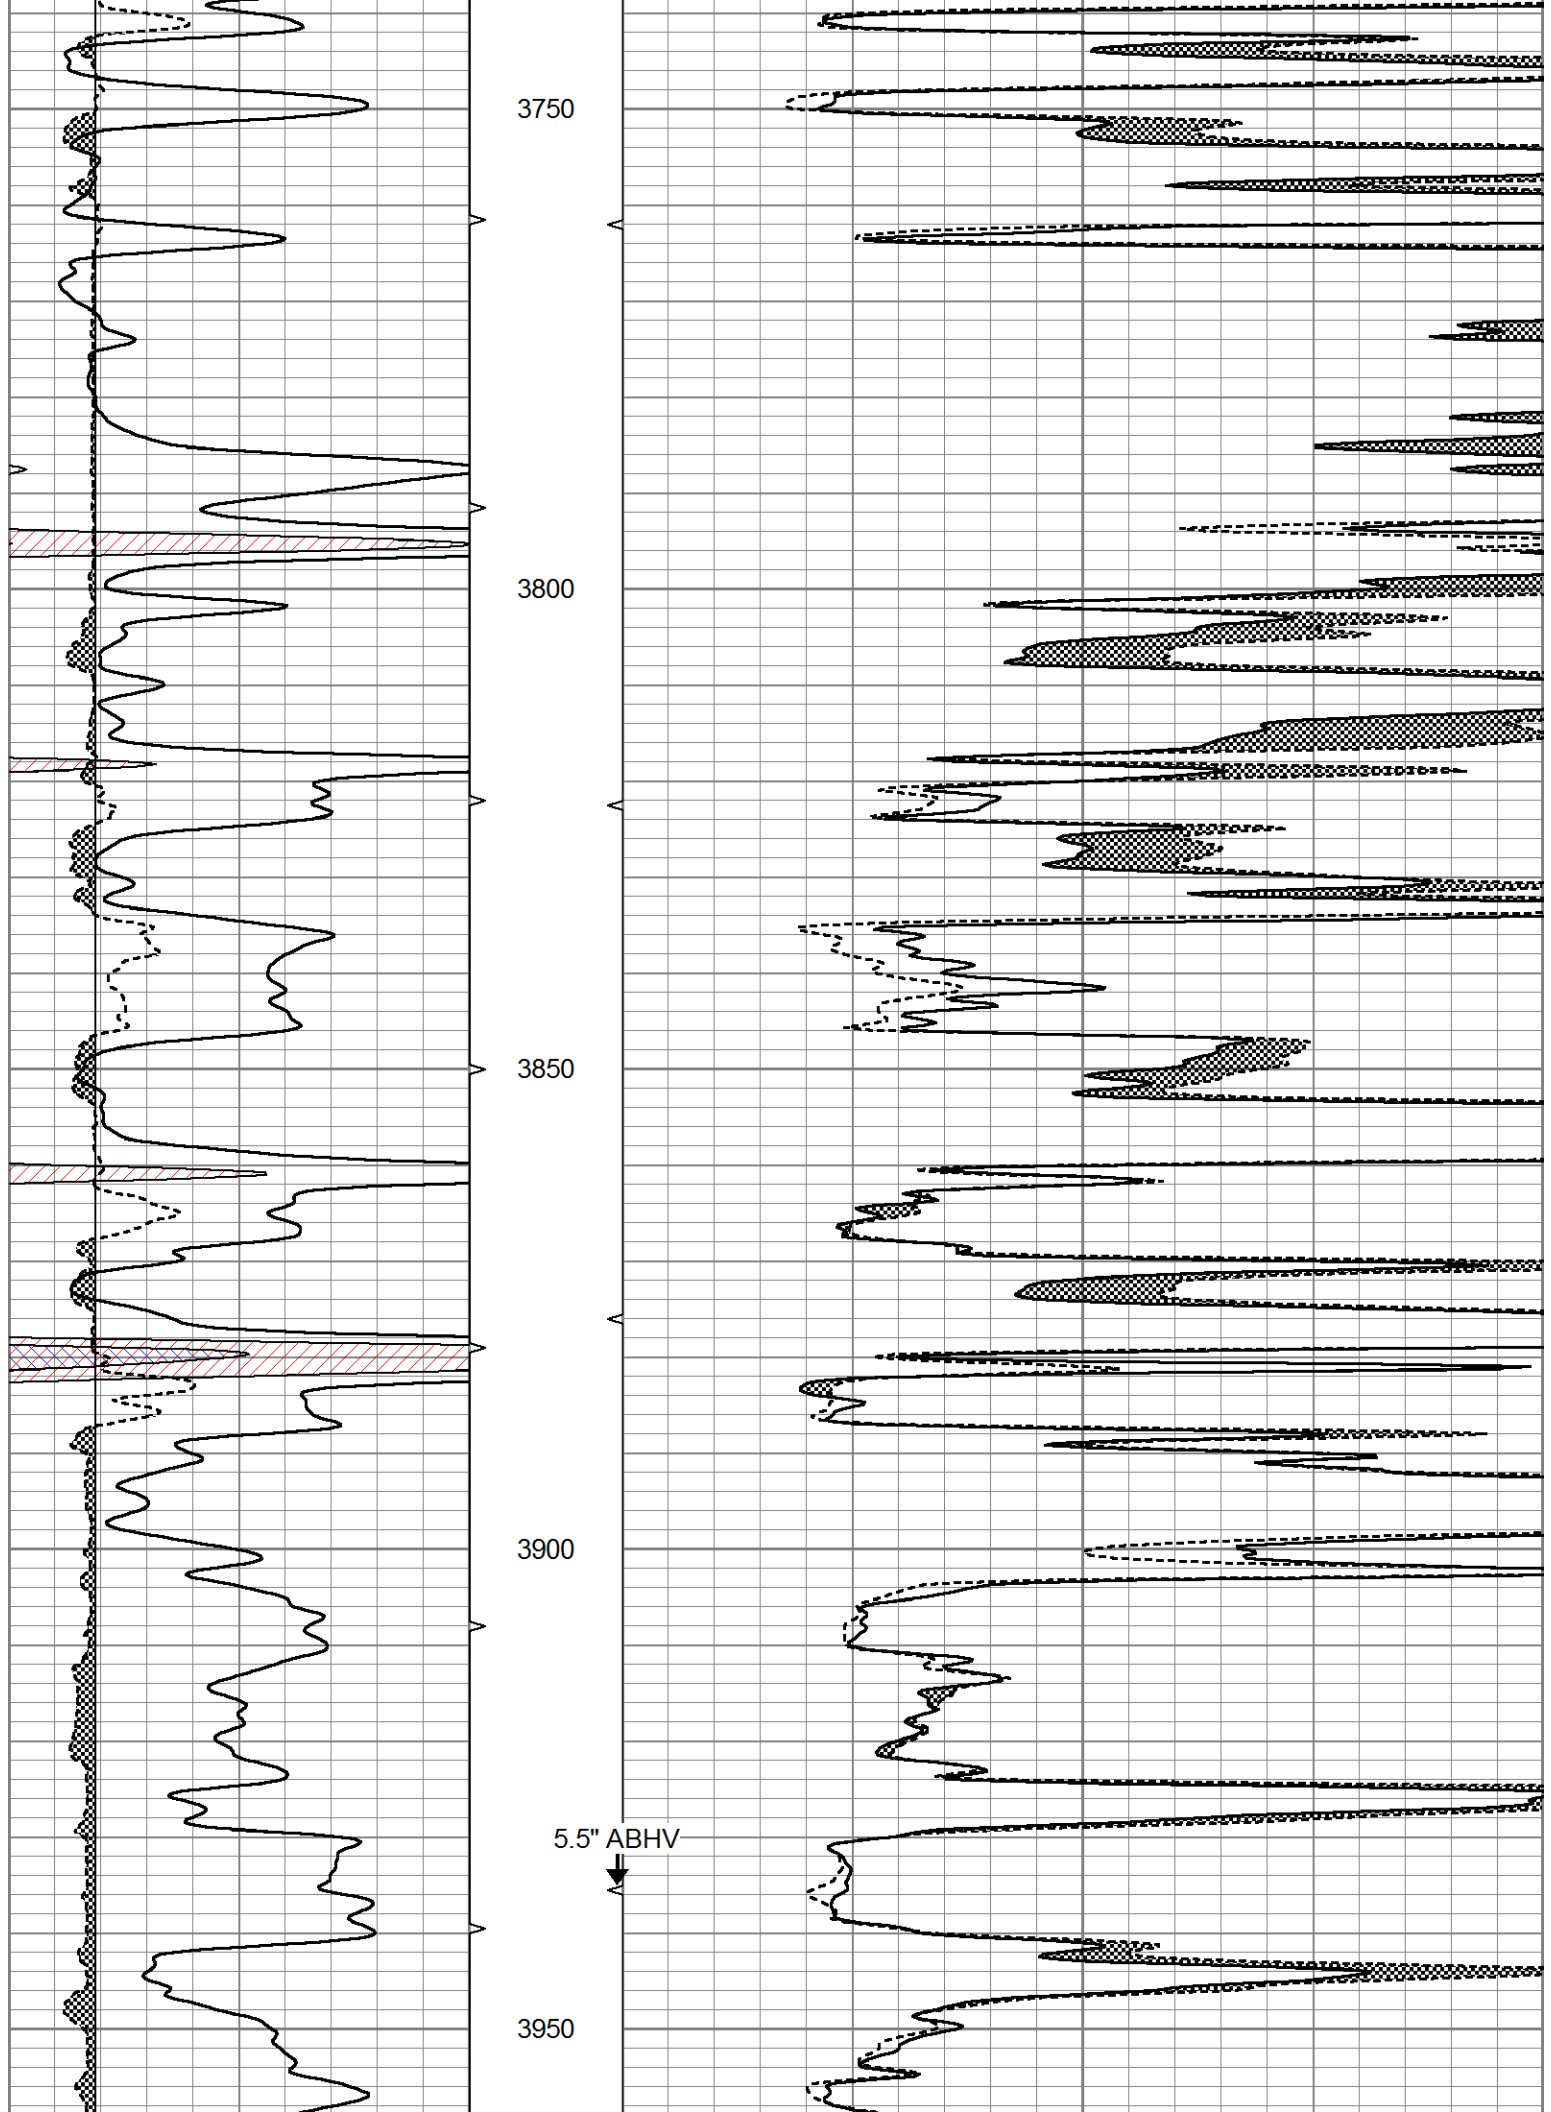


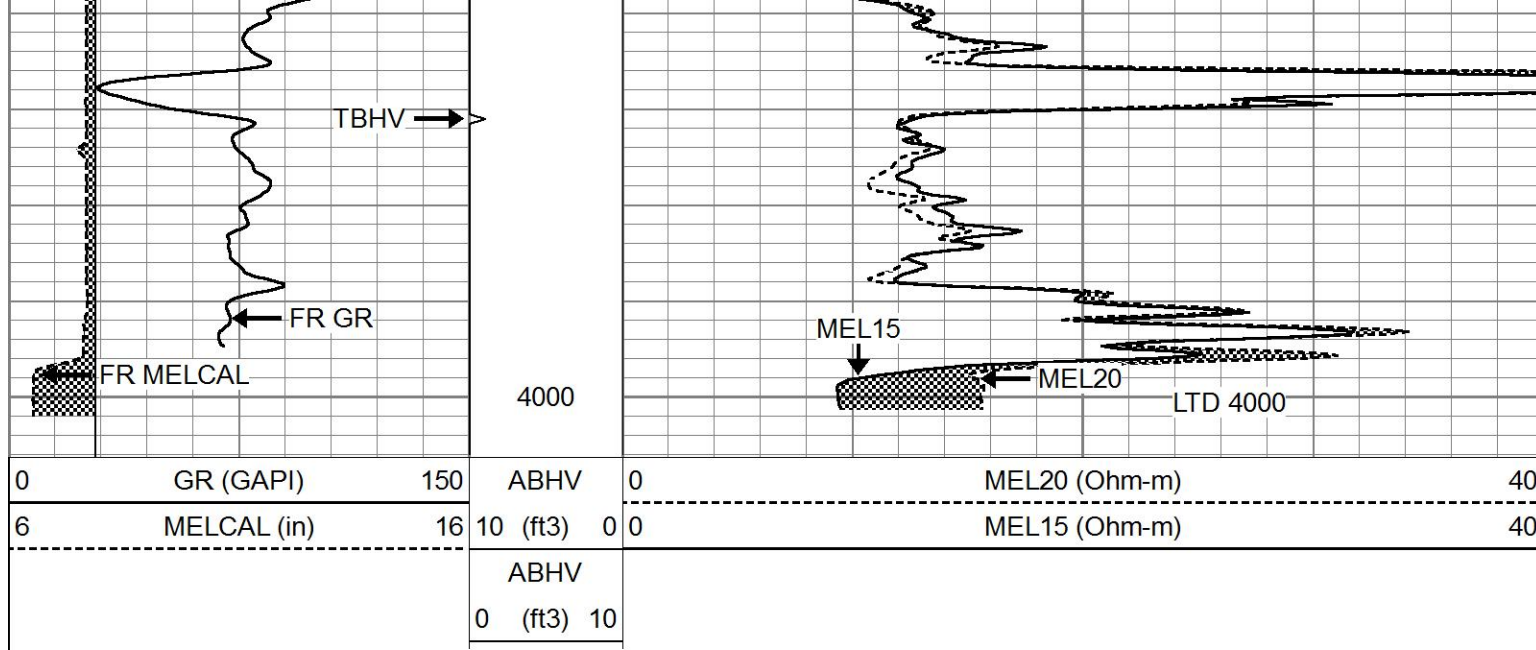


REPEAT SECTION

Database File 8954ddn.db
 Dataset Pathname pass6.6
 Presentation Format micro
 Dataset Creation Thu Oct 03 19:46:01 2024
 Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3)	10		

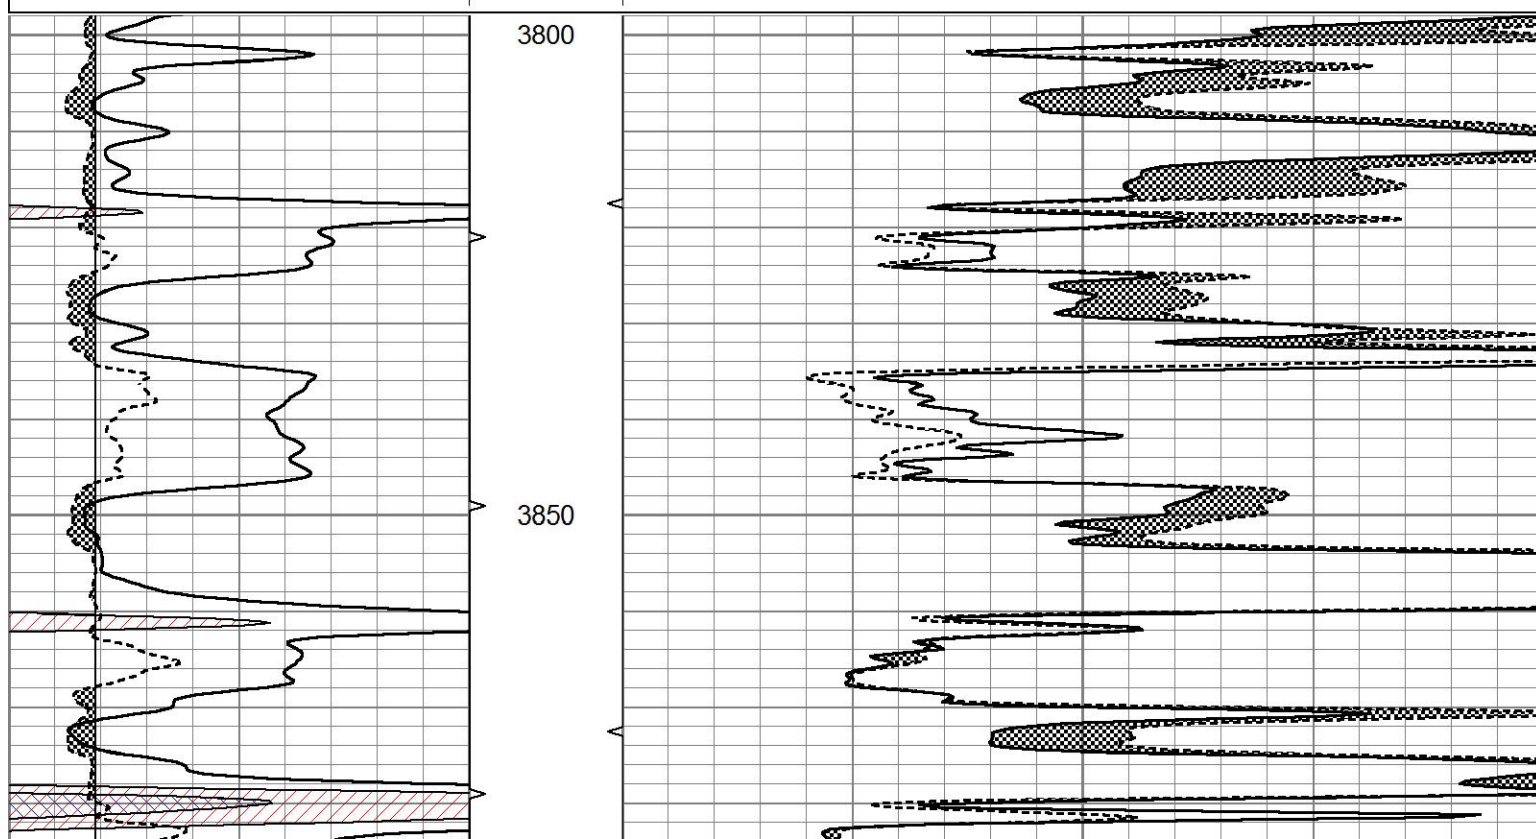

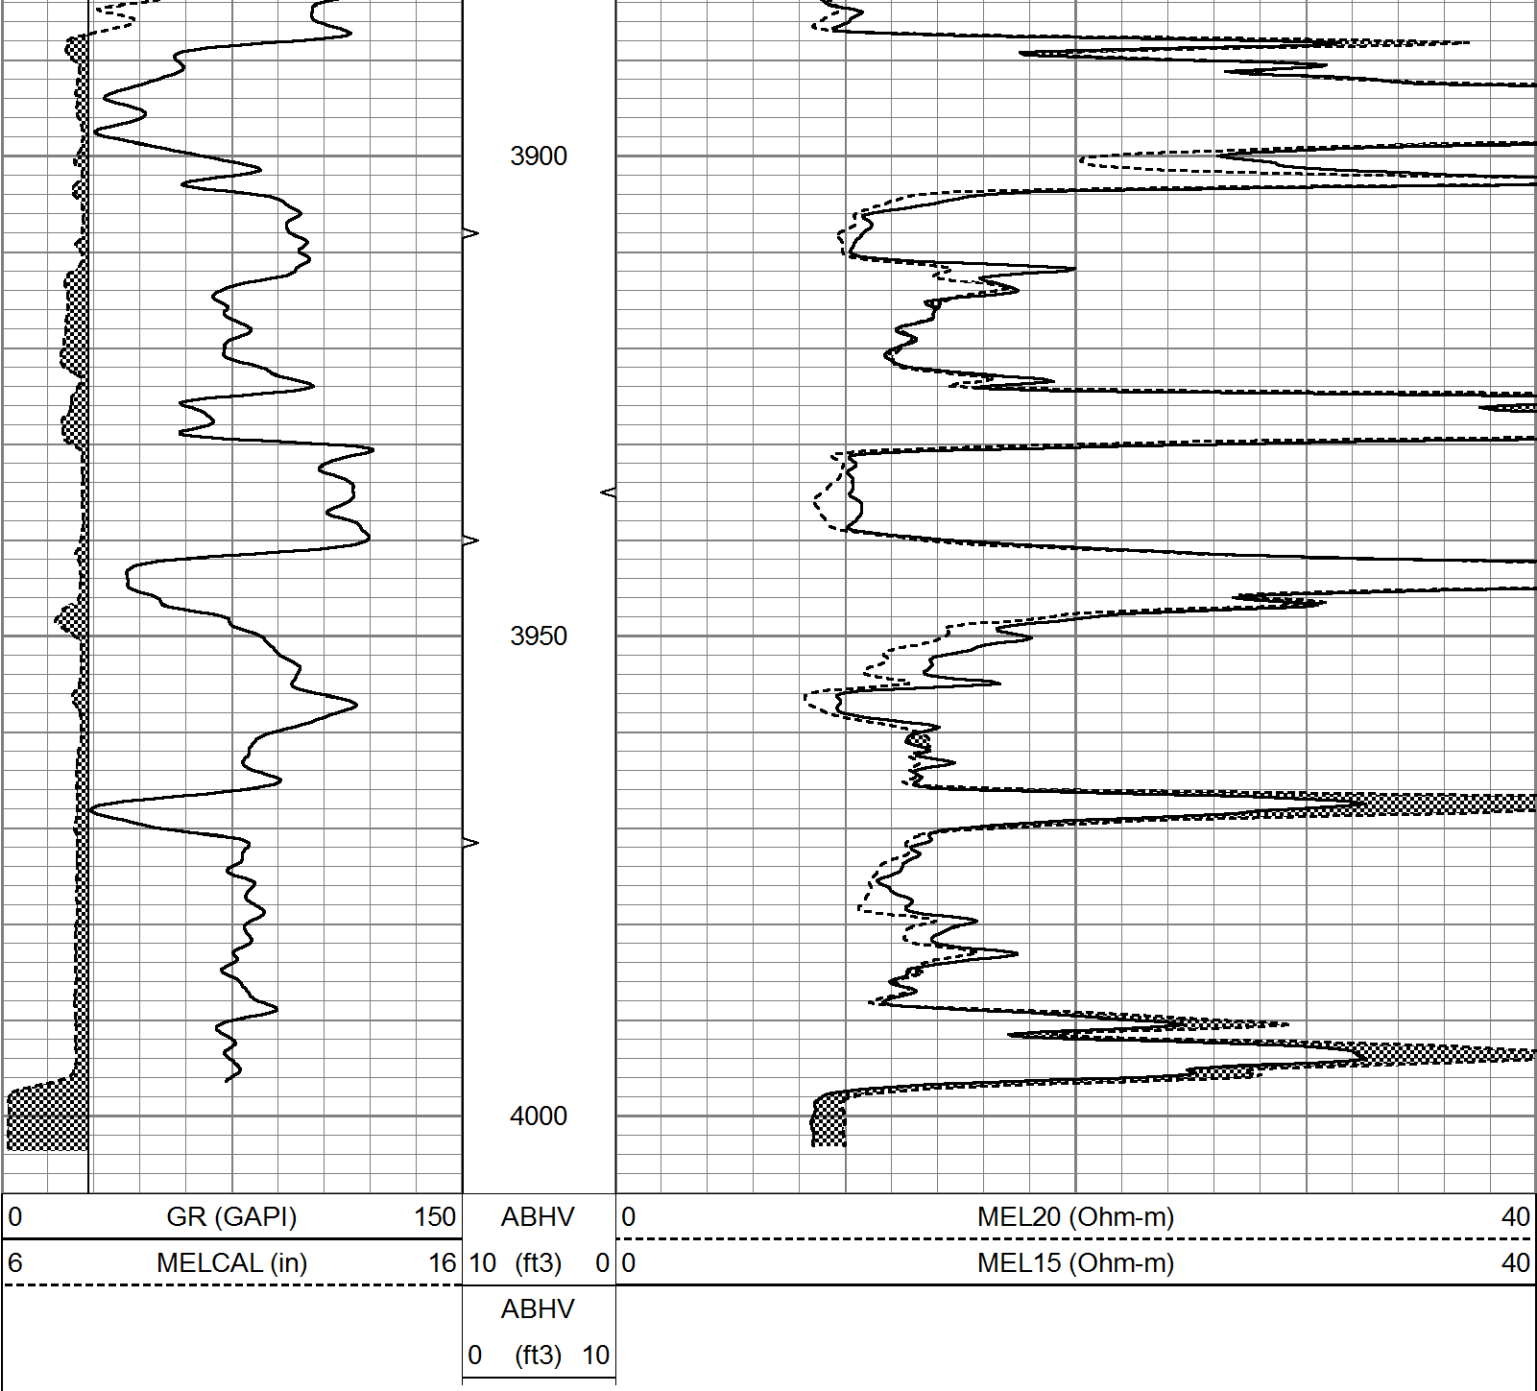

Calibration Report			
Database File	8954ddn.db		
Dataset Pathname	pass7.6		
Dataset Creation	Thu Oct 03 19:35:37 2024		
MICRO Calibration Report			
Serial Number:	070911		
Tool Model:	ProbeN		
Performed:	Thu Oct 03 18:29:47 2024		
Caliper Calibration:	Gain=6.723	Offset=-0.134	
References	Low Cal	High Cal	
	8.000	16.000	
	1.210	2.400	
1.5" Calibration:	Gain=125.000	Offset=-1.000	
References	Low Cal	High Cal	
	0.000	20.000	

Readings	0.017	1.218
2" Calibration:	Gain=100.000	Offset=-0.500
References	Low Cal 0.000	High Cal 20.000
Readings	0.015	1.051
Gamma Ray Calibration Report		
Serial Number:	070558	
Tool Model:	OPEN_GR	
Performed:	Thu Oct 03 18:29:43 2024	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.3200	GAPI/cps