MICRO LOG

Company PALOMINO PETROLEUM
Well THE GREEN MILE #1
Field
County SCOTT State KS

Company PALOMINO PETROLEUM
Well THE GREEN MILE #1
Field
County SCOTT
State KS

Location: API # : 15 171 21302

1374' FSL & 2073' FWL

SEC 30 TWP 20S RGE 33W

Other Services
CDNL
DIL

Permanent Datum	Ground Level	Elevation	2957
Log Measured From	KB 5' AGL		
Drilling Measured From	KB		

Elevation
K.B. 2962
D.F. 2960
G.L. 2957

Date	11/19/22		
Run Number	TWO		
Depth Driller	4856		
Depth Logger	4856		
Bottom Logged Interval	4854		
Top Log Interval	3400		
Casing Driller	8 5/8" @ 220		
Casing Logger	220		
Bit Size	7 7/8"		
Type Fluid in Hole	Chemical		
Density / Viscosity	9.6/48		
pH / Fluid Loss	9.5/10.4		
Source of Sample	Pit		
Rm @ Meas. Temp	1.1@70degf		
Rmf @ Meas. Temp	.83@70degf		
Rmc @ Meas. Temp	1.32@70degf		
Source of Rmf / Rmc	Calculated		
Rm @ BHT	.74@103degf		
Time Circulation Stopped	4:30 P.M.		
Time Logger on Bottom	6:00 PM		
Maximum Recorded Temperature	103degf		
Equipment Number	T605		
Location	Hays, KS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	KIM SHOEMAKER		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

SOUTH OF SCOTT CITY TO COUNTY LINE WEST TO FALCON RD
NORTH 1 MILE, EAST INTO.

Thank You for using Gemini Wireline LLC
785-625-1182

MAIN PASS

Database File	ppthegreenmile#1oh.db
Dataset Pathname	pass6
Presentation Format	kml
Dataset Creation	Sat Nov 19 20:43:32 2022
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50

0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

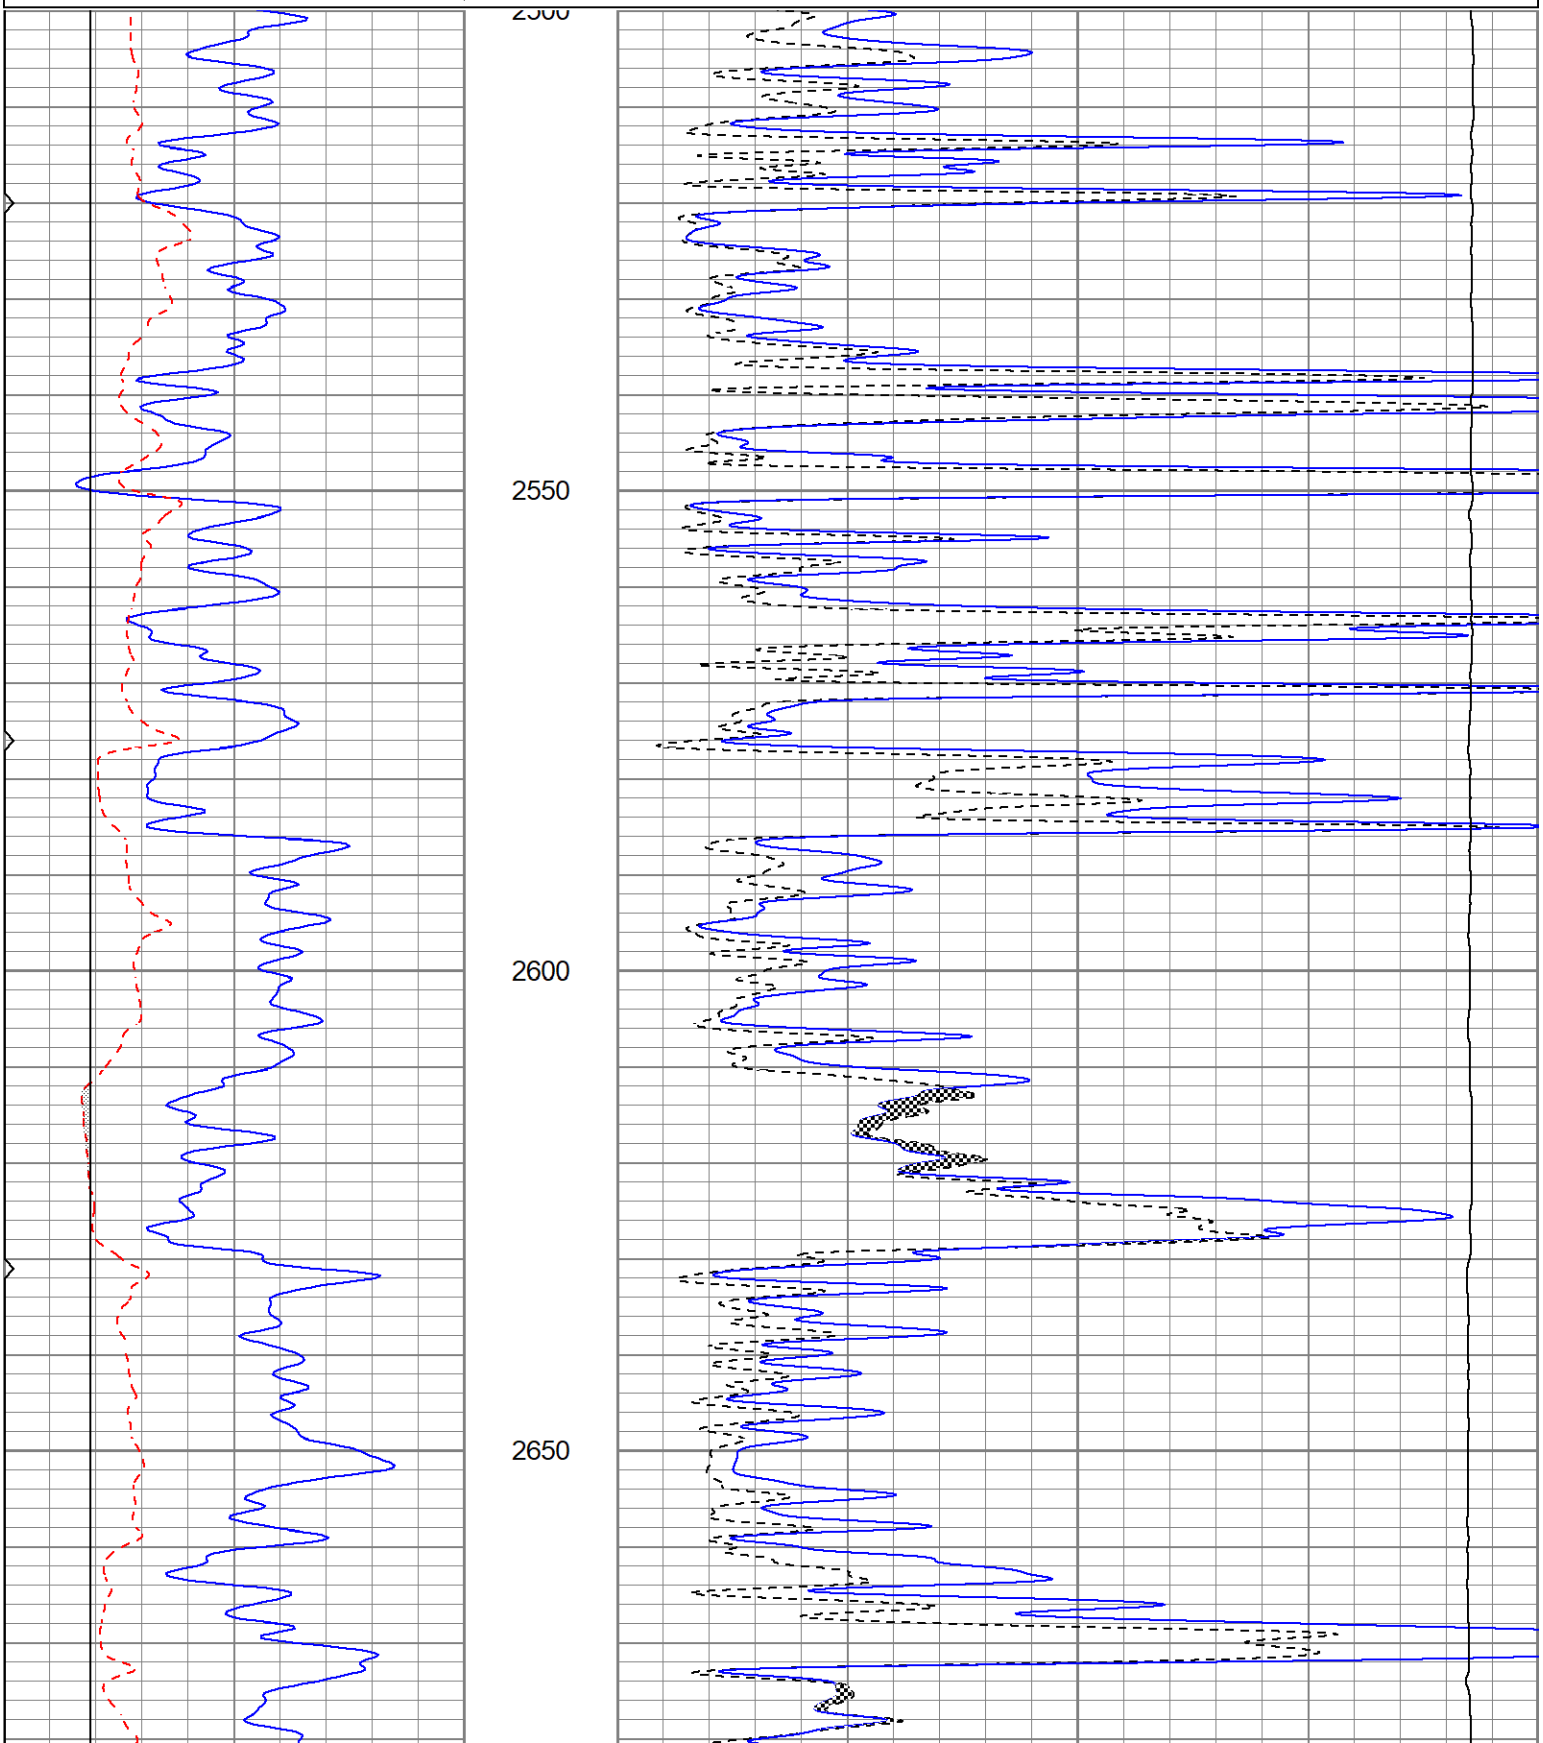

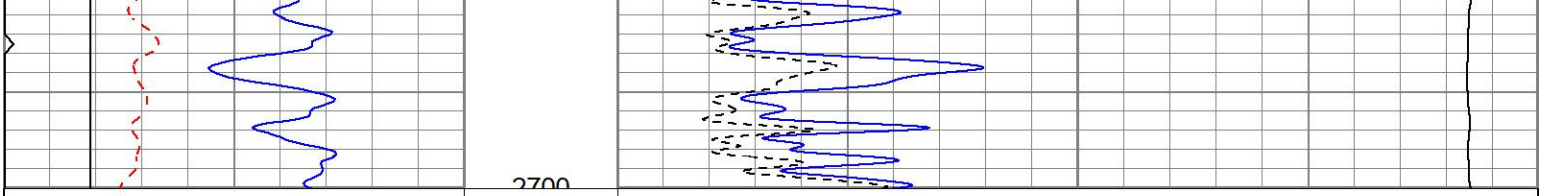

0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50

0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

MAIN PASS

Database File	ppthegreenmile#1oh.db
Dataset Pathname	pass5
Presentation Format	kml
Dataset Creation	Sat Nov 19 20:12:43 2022
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50

0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

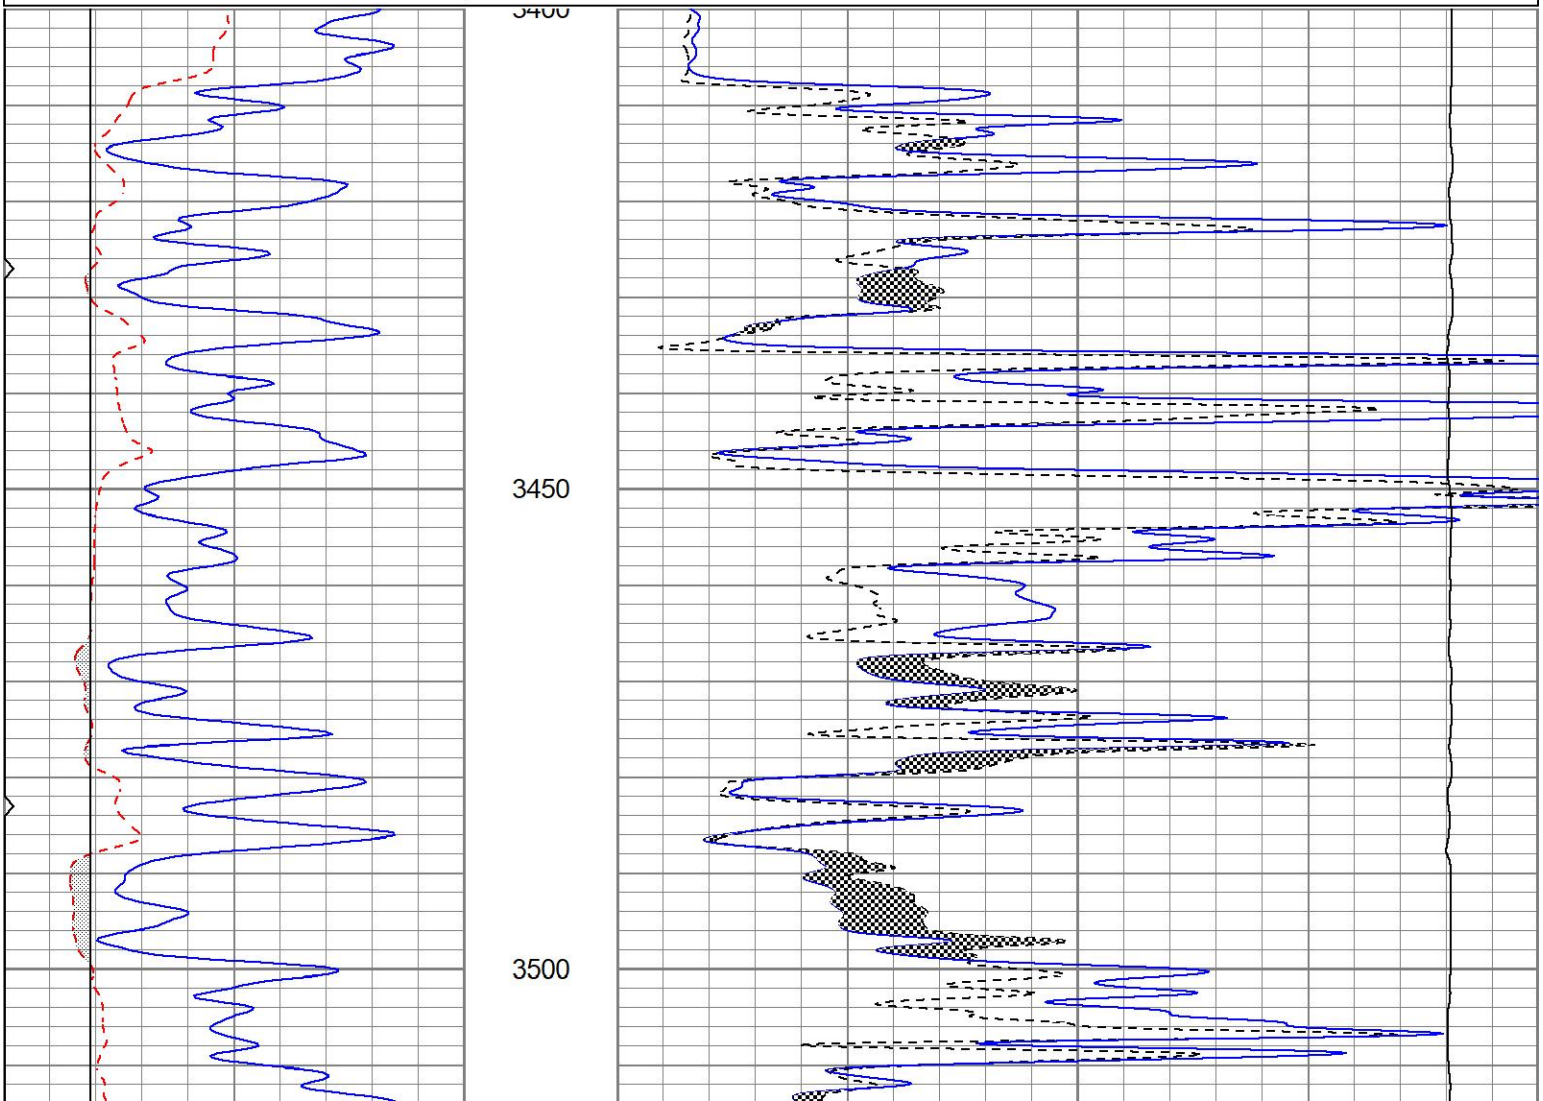

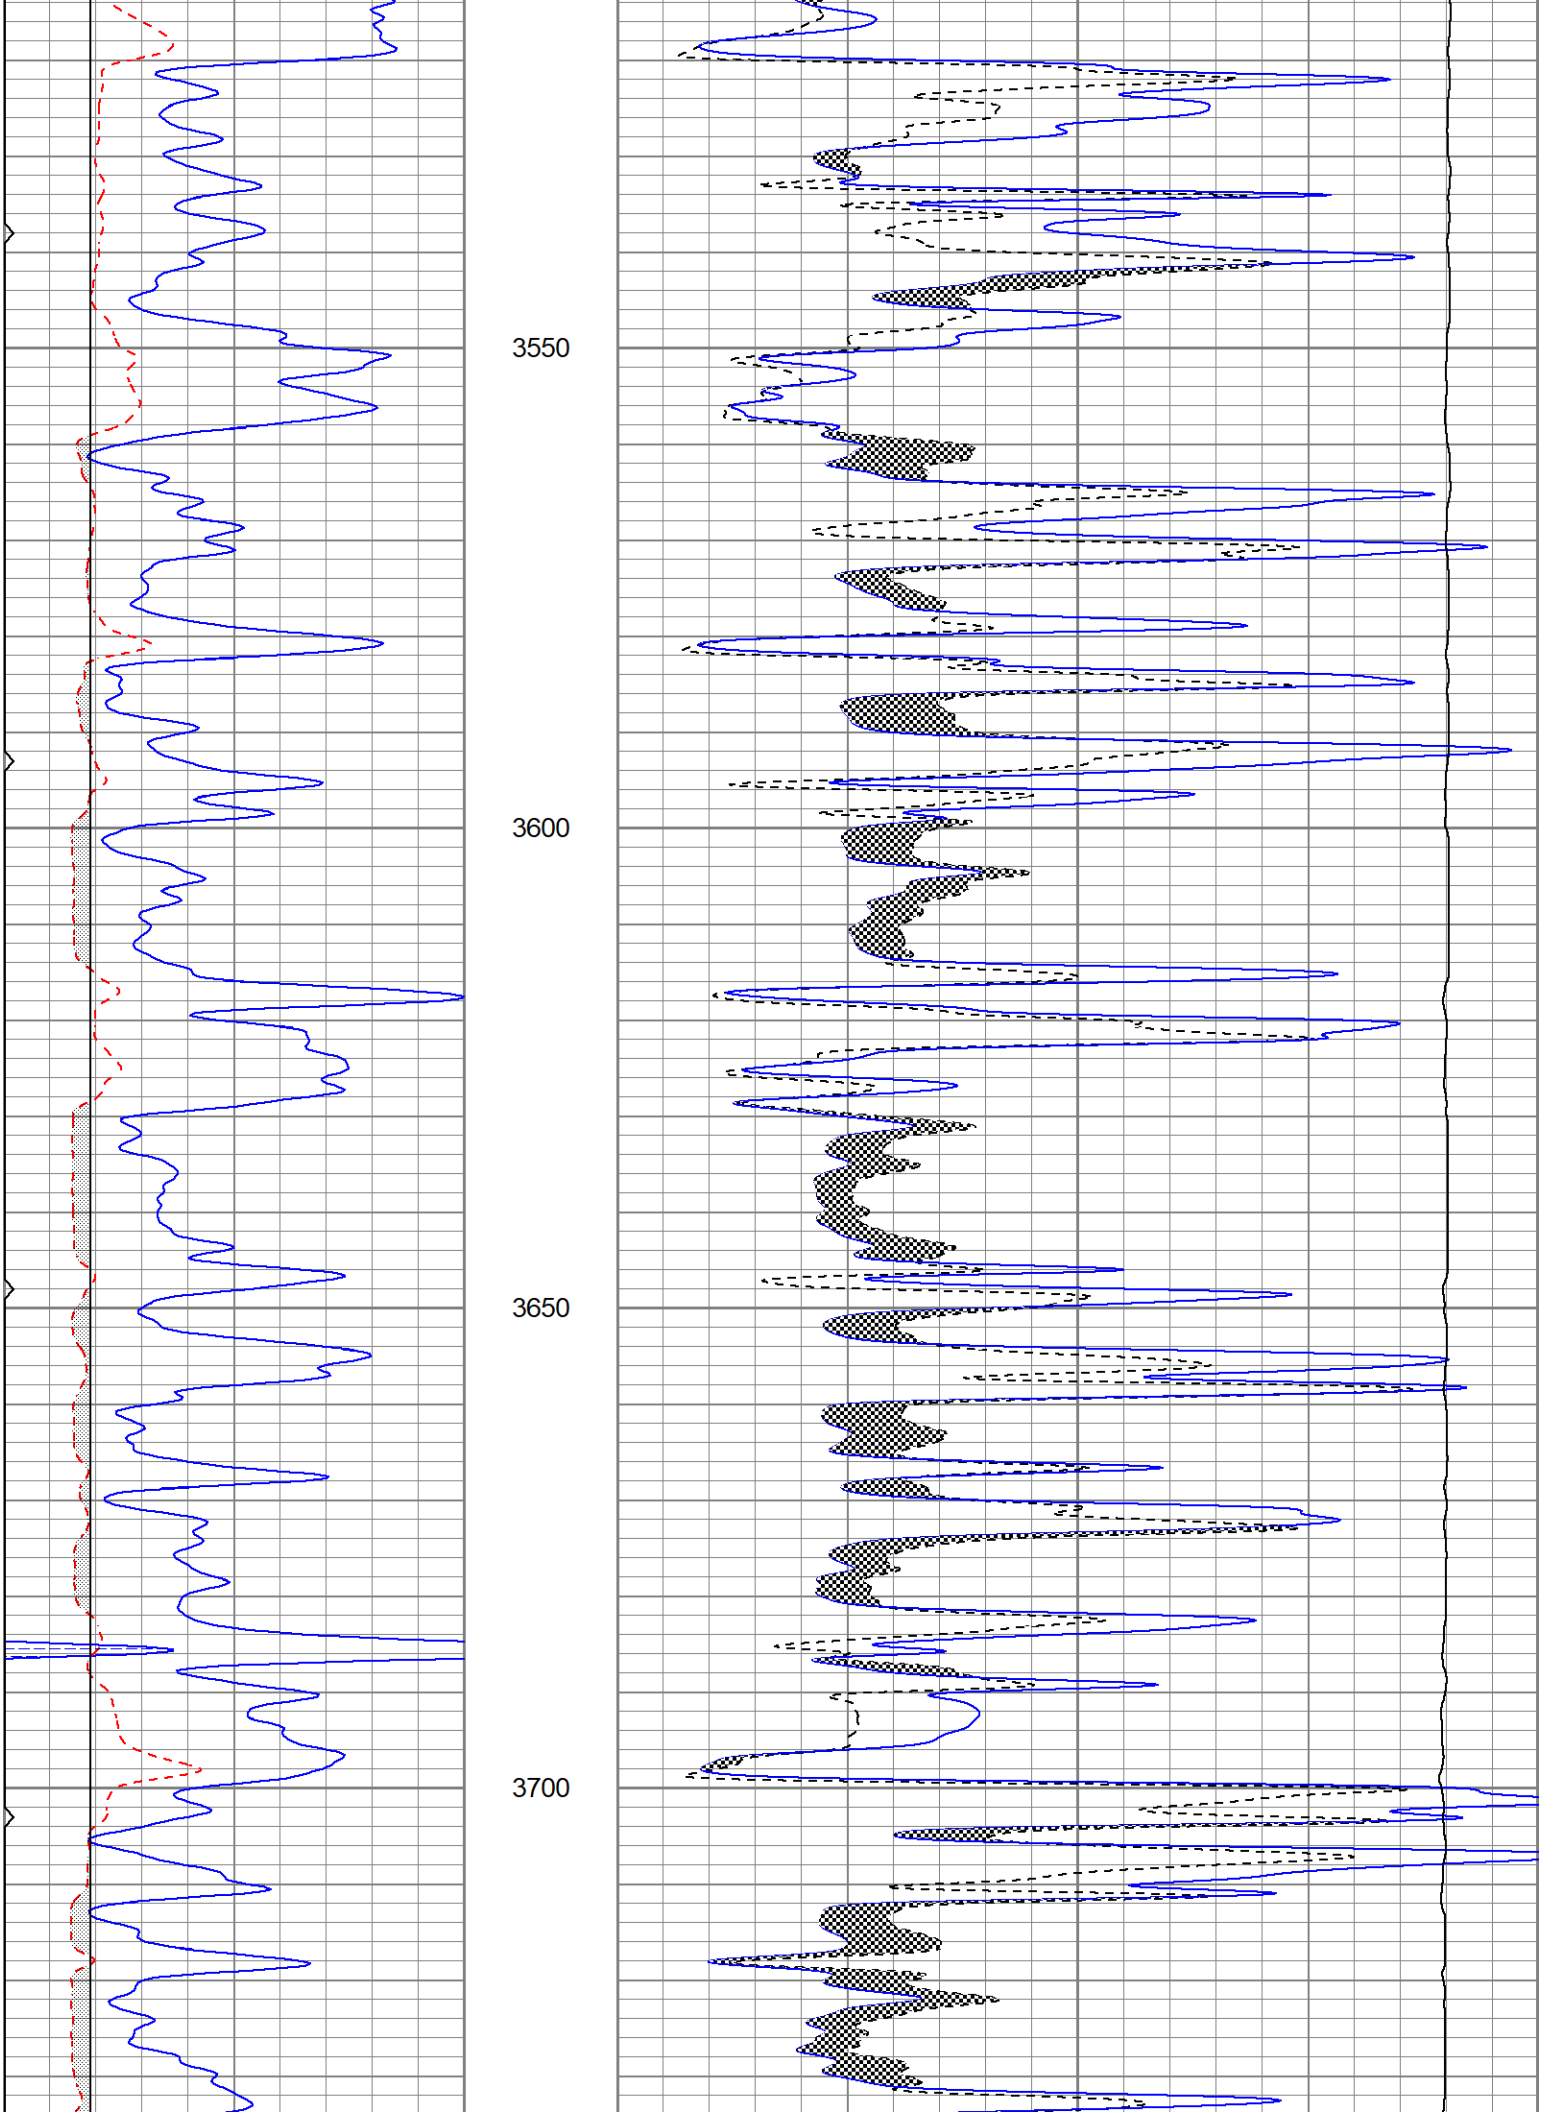
3550
3600
3650
3700

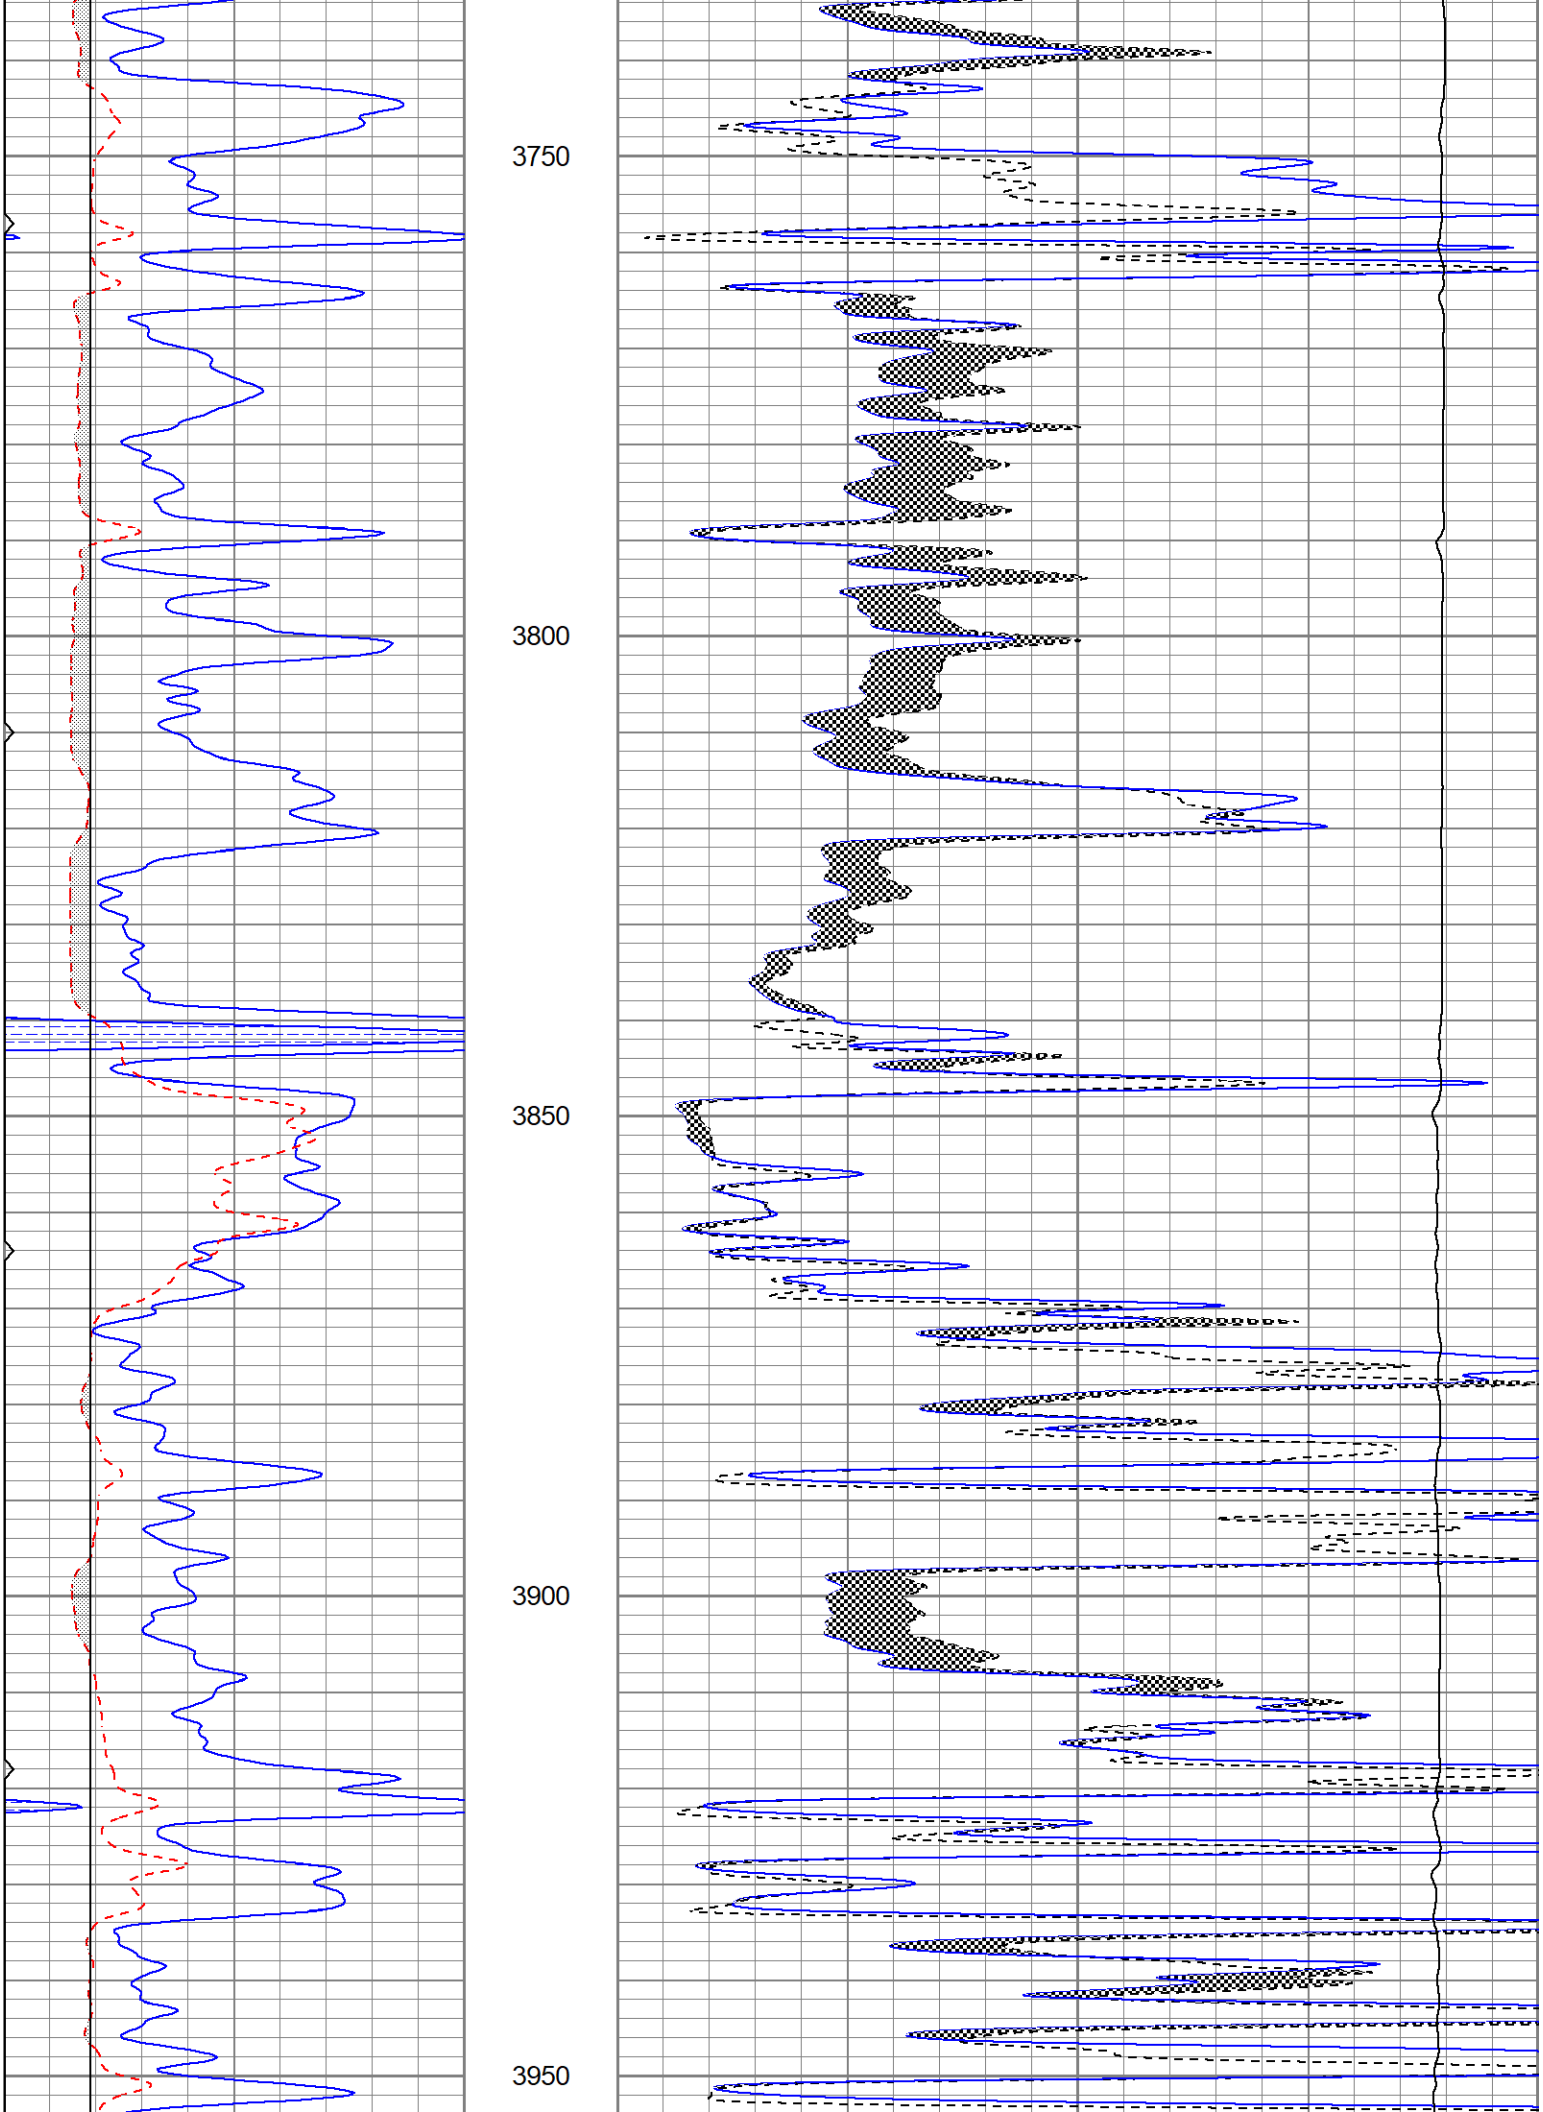
3750
3800
3850
3900
3950

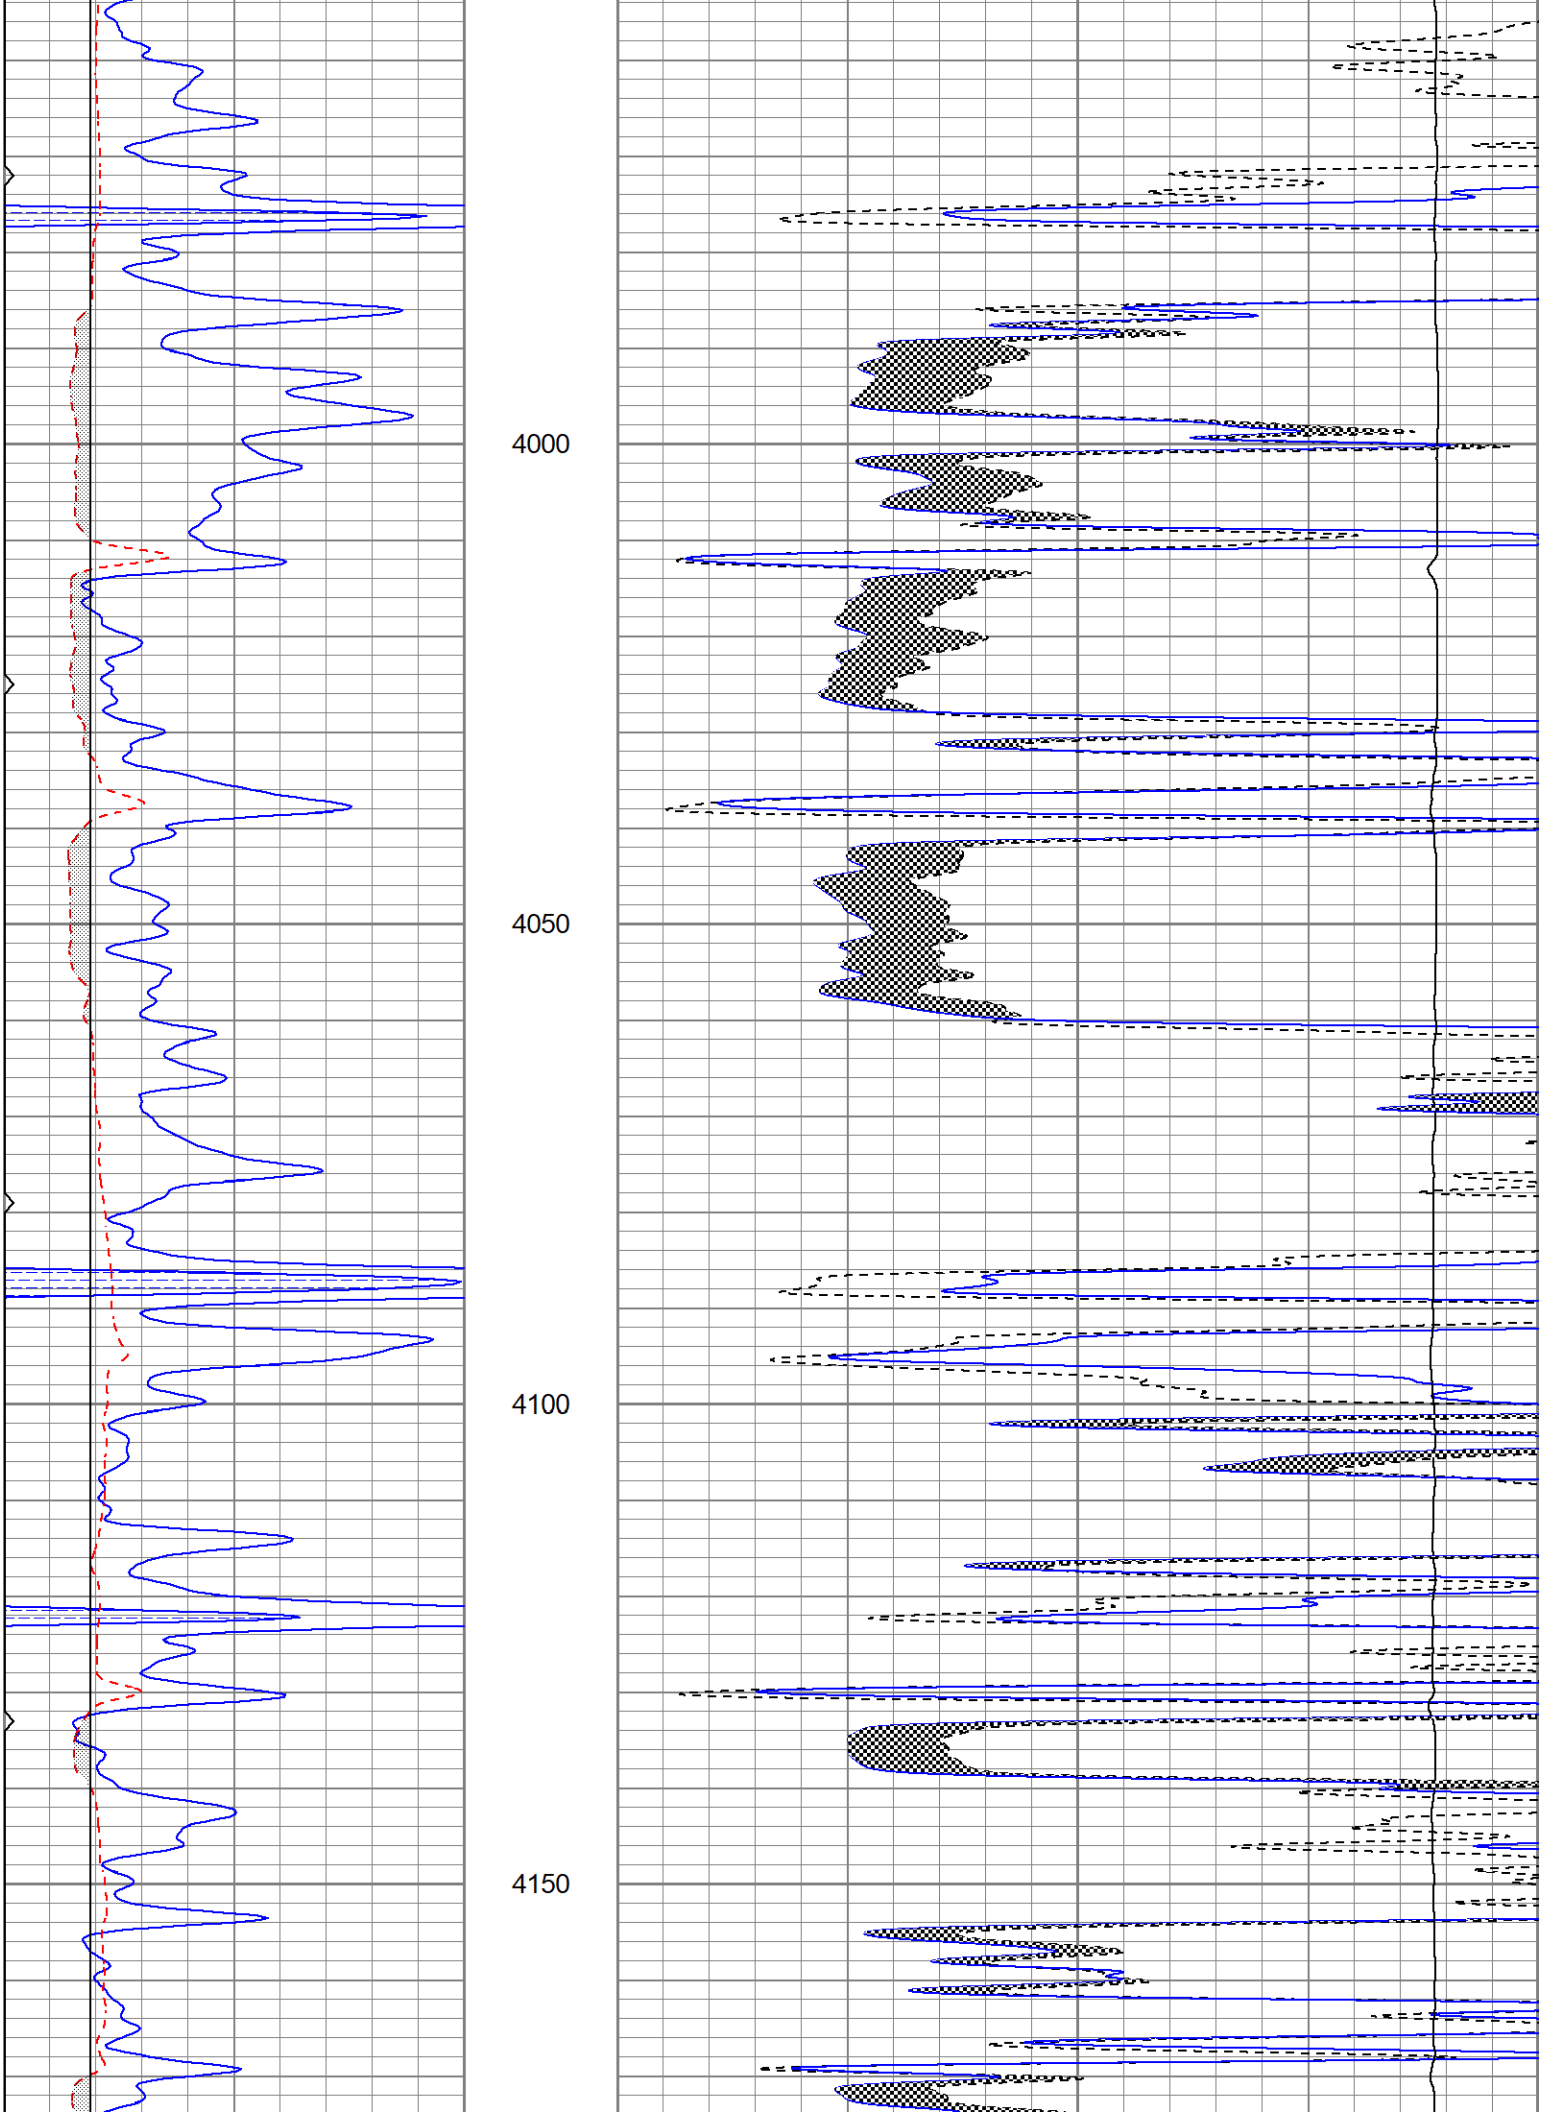
4000
4050
4100
4150

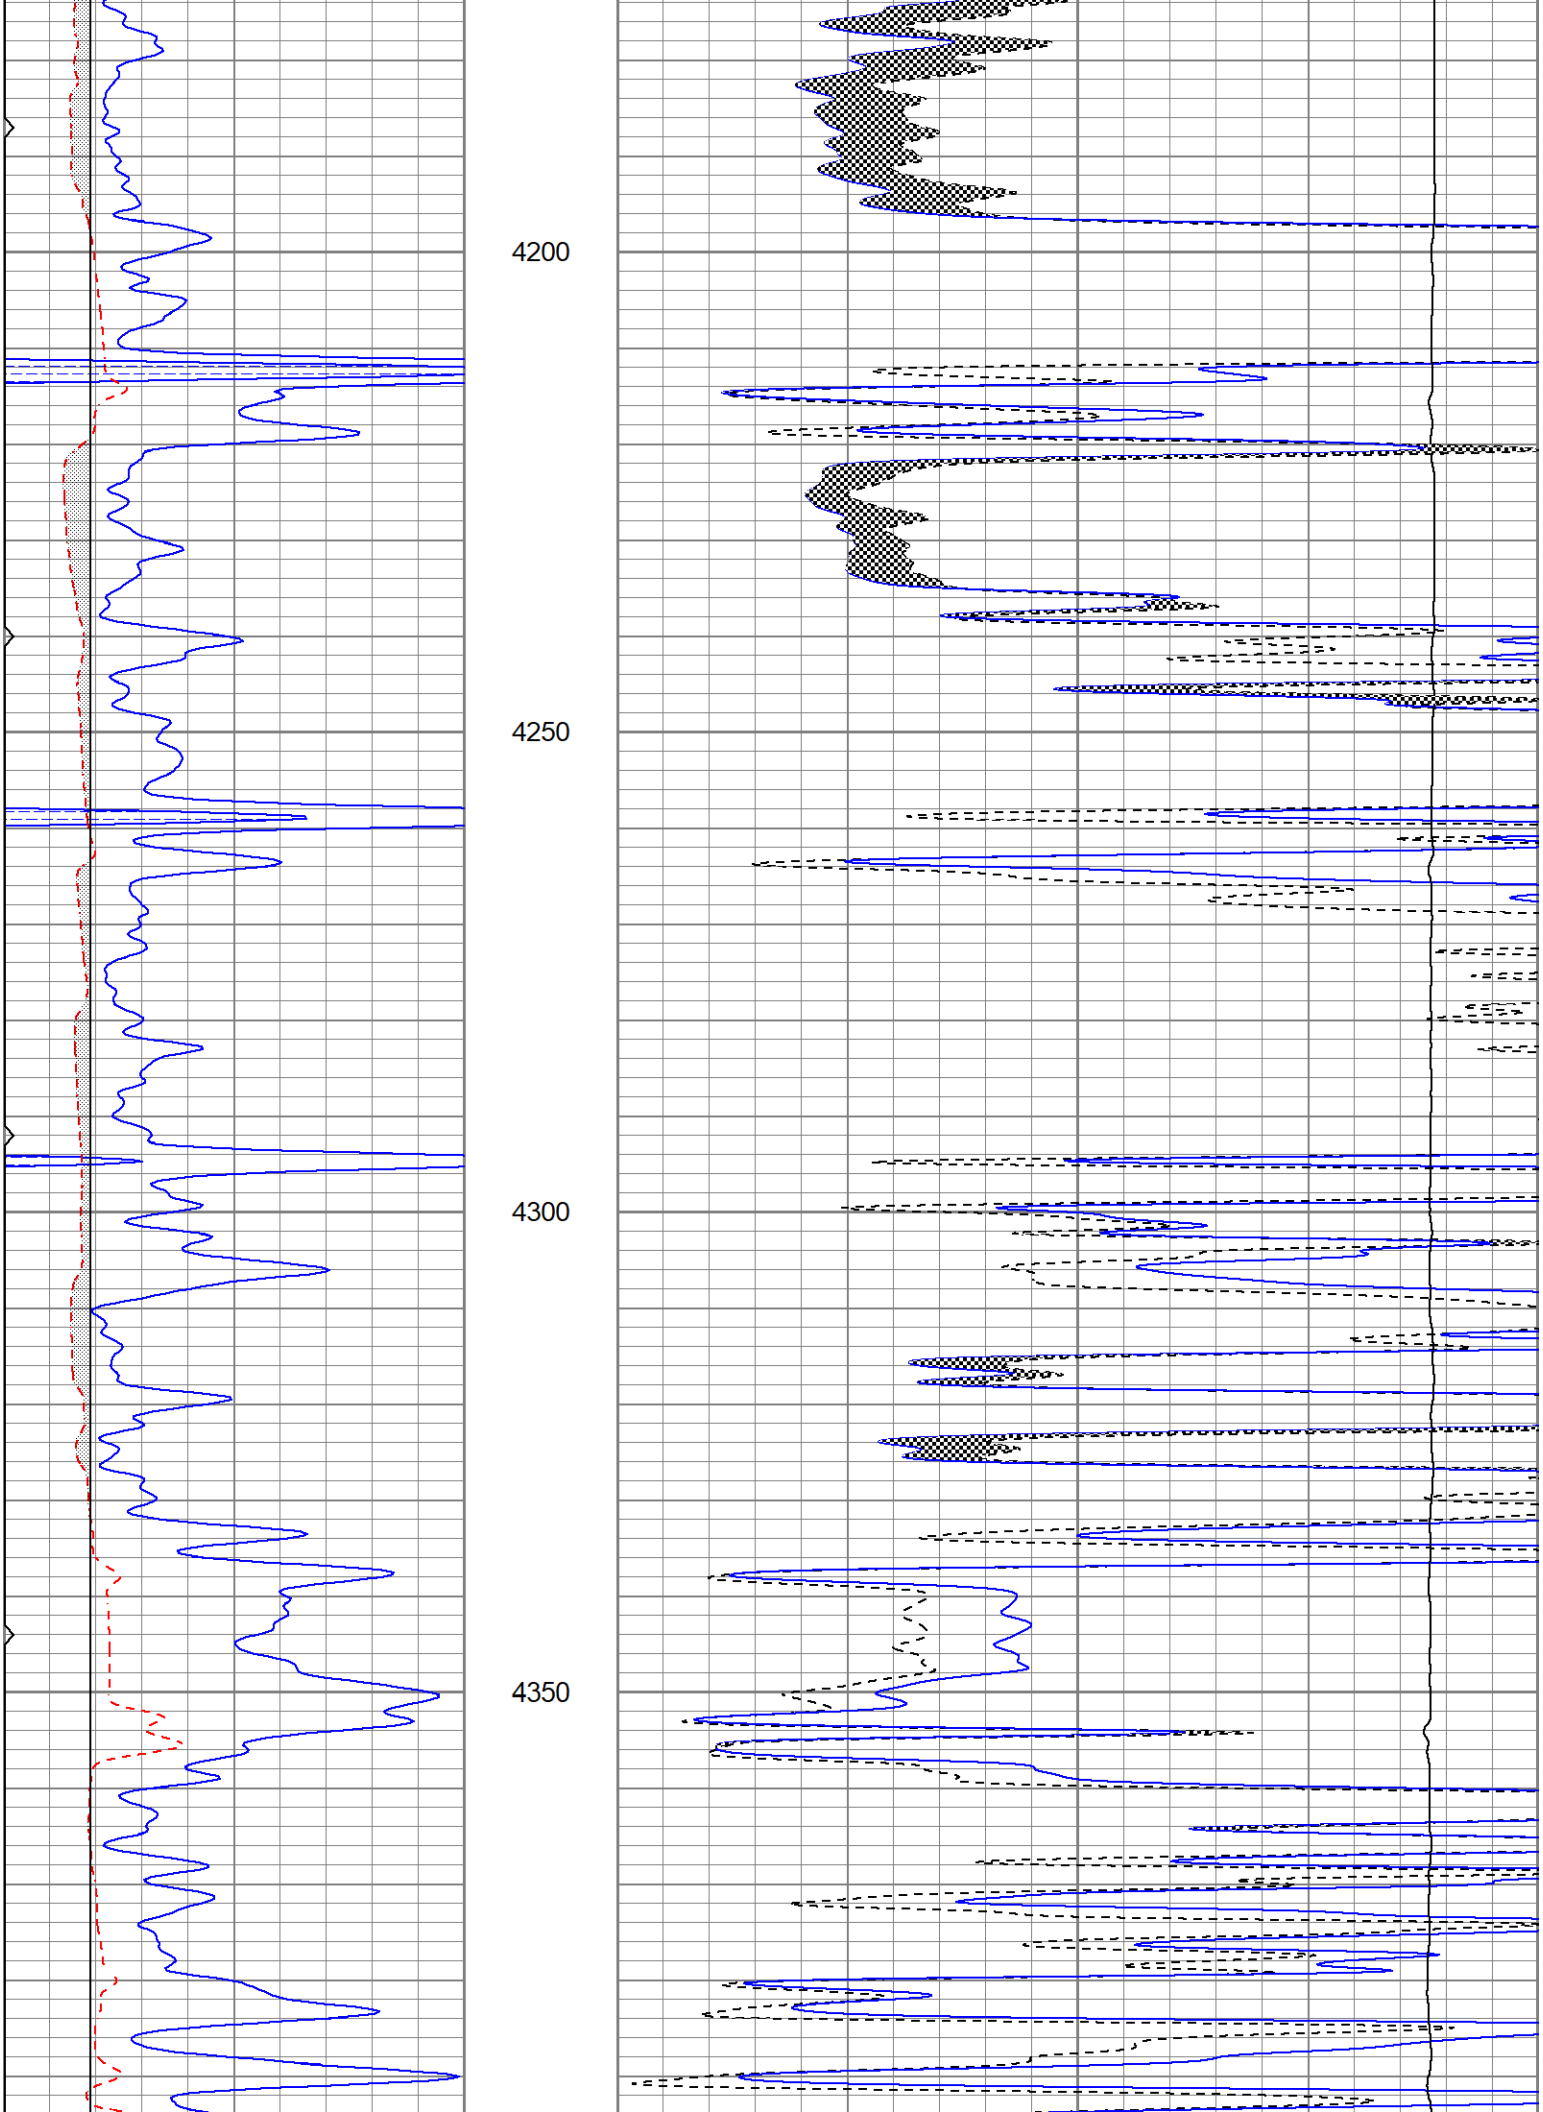
4200
4250
4300
4350

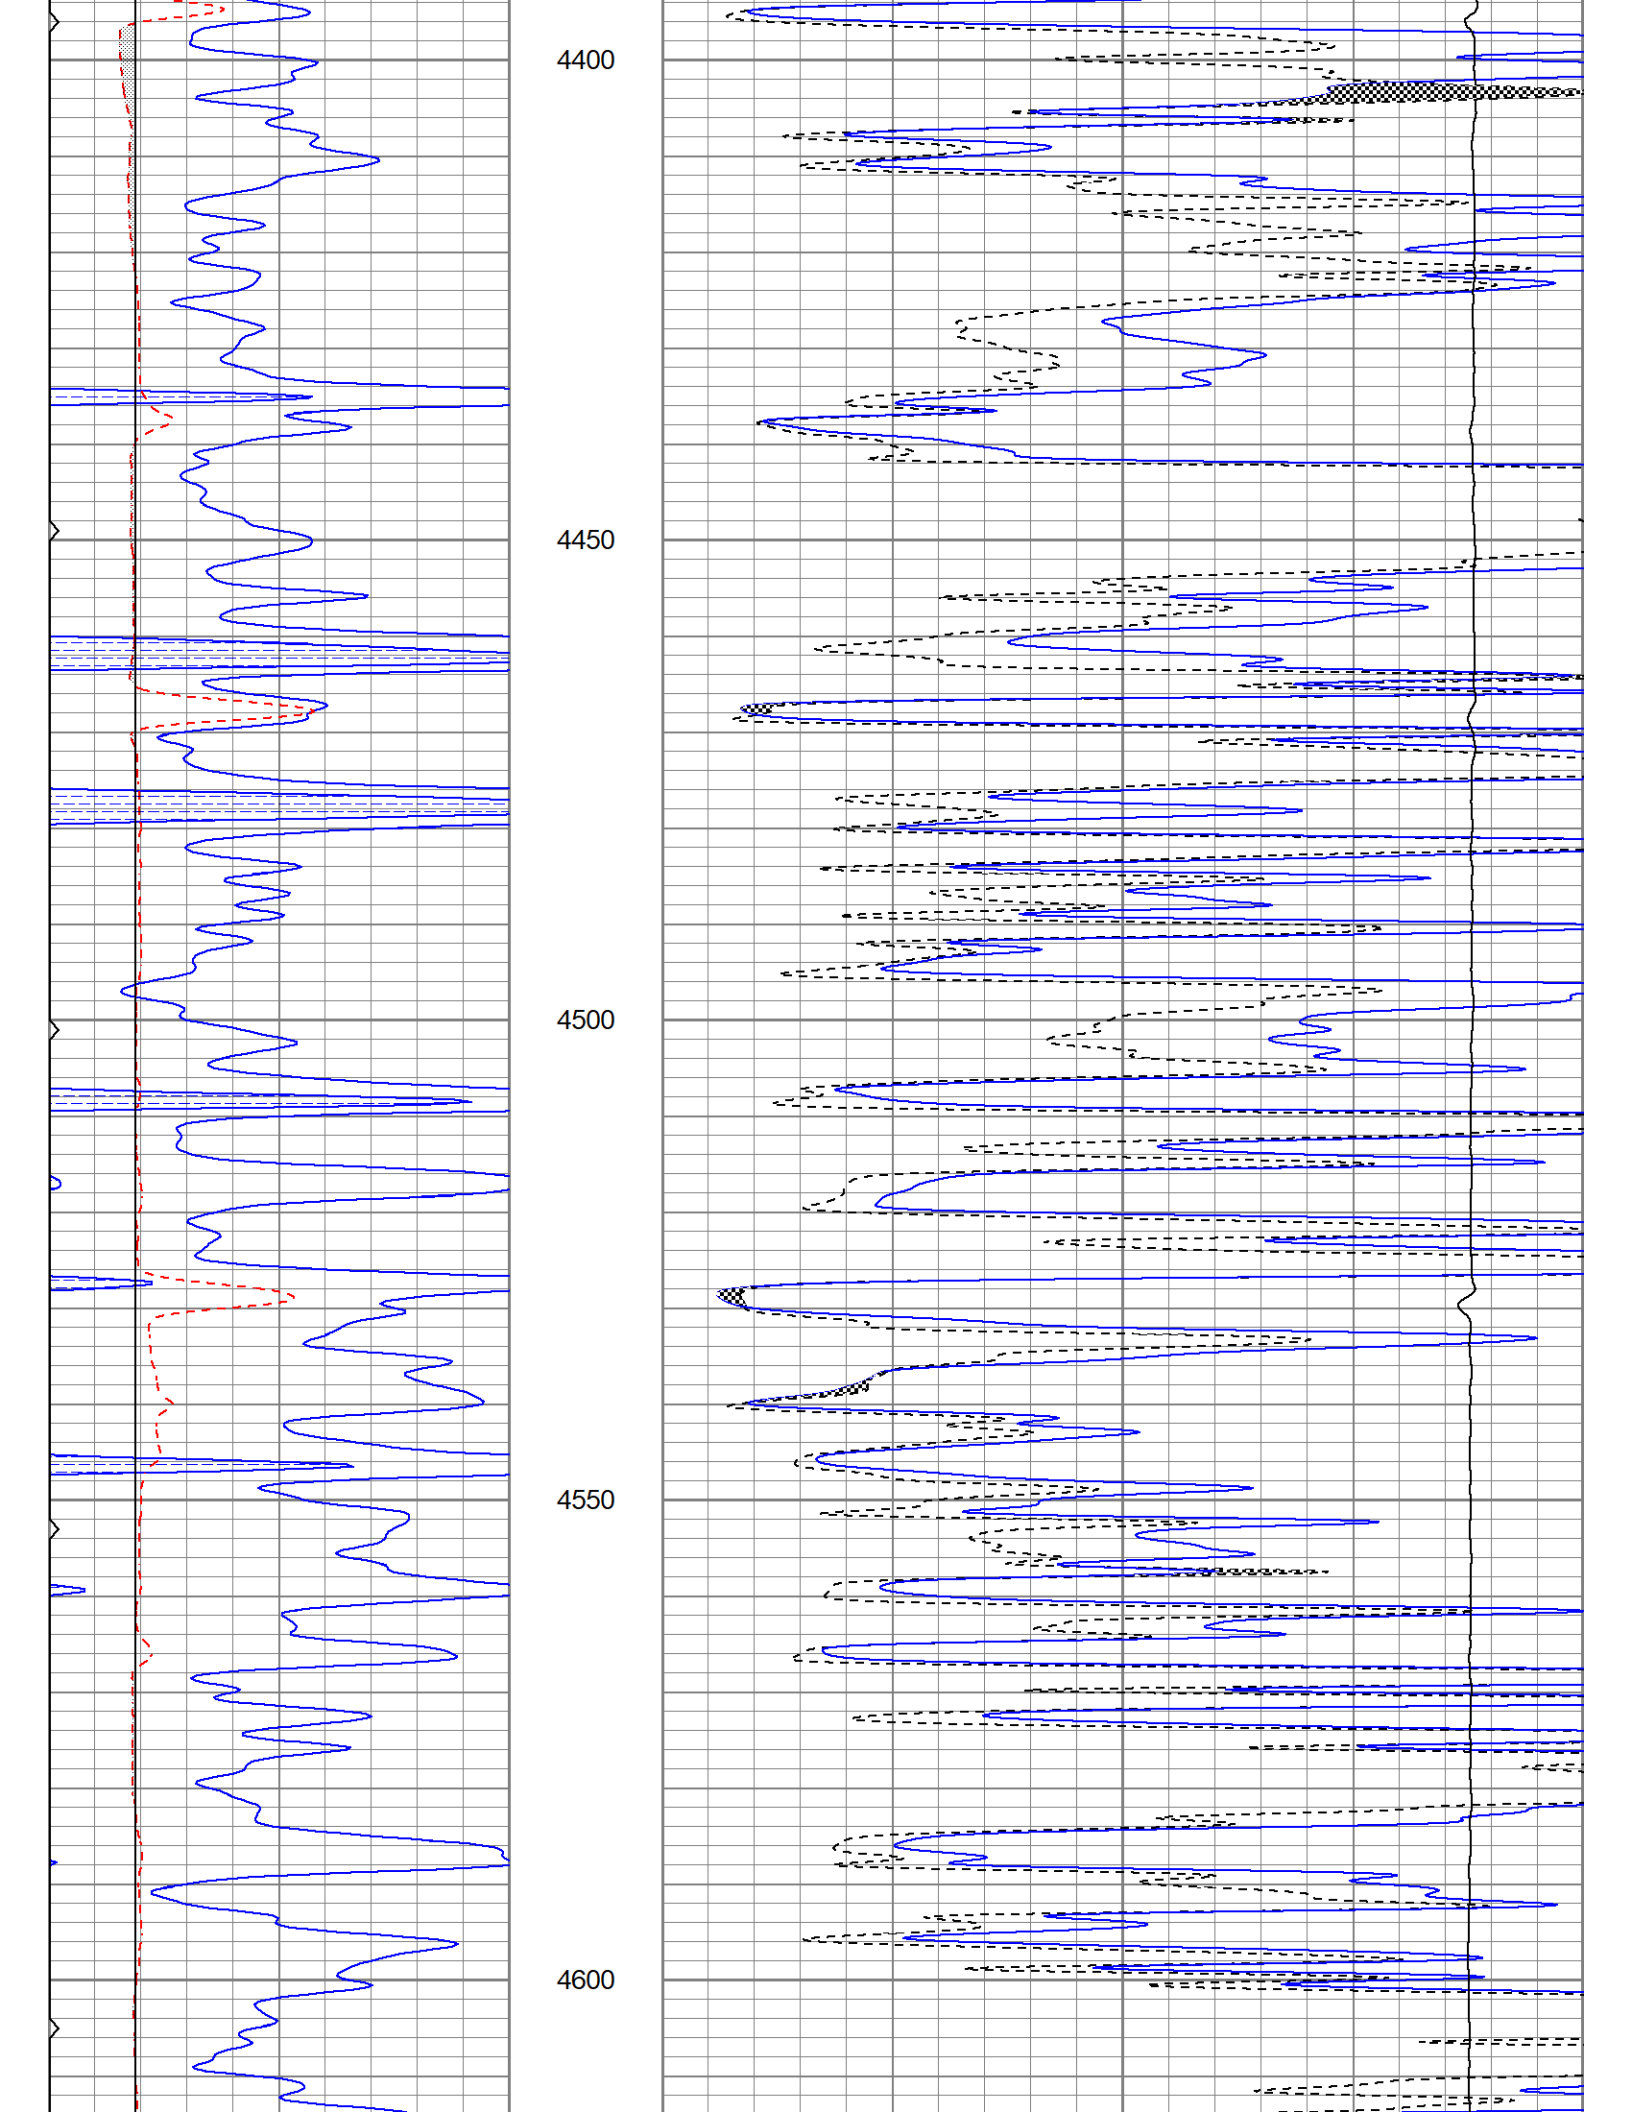
4400
4450
4500
4550
4600

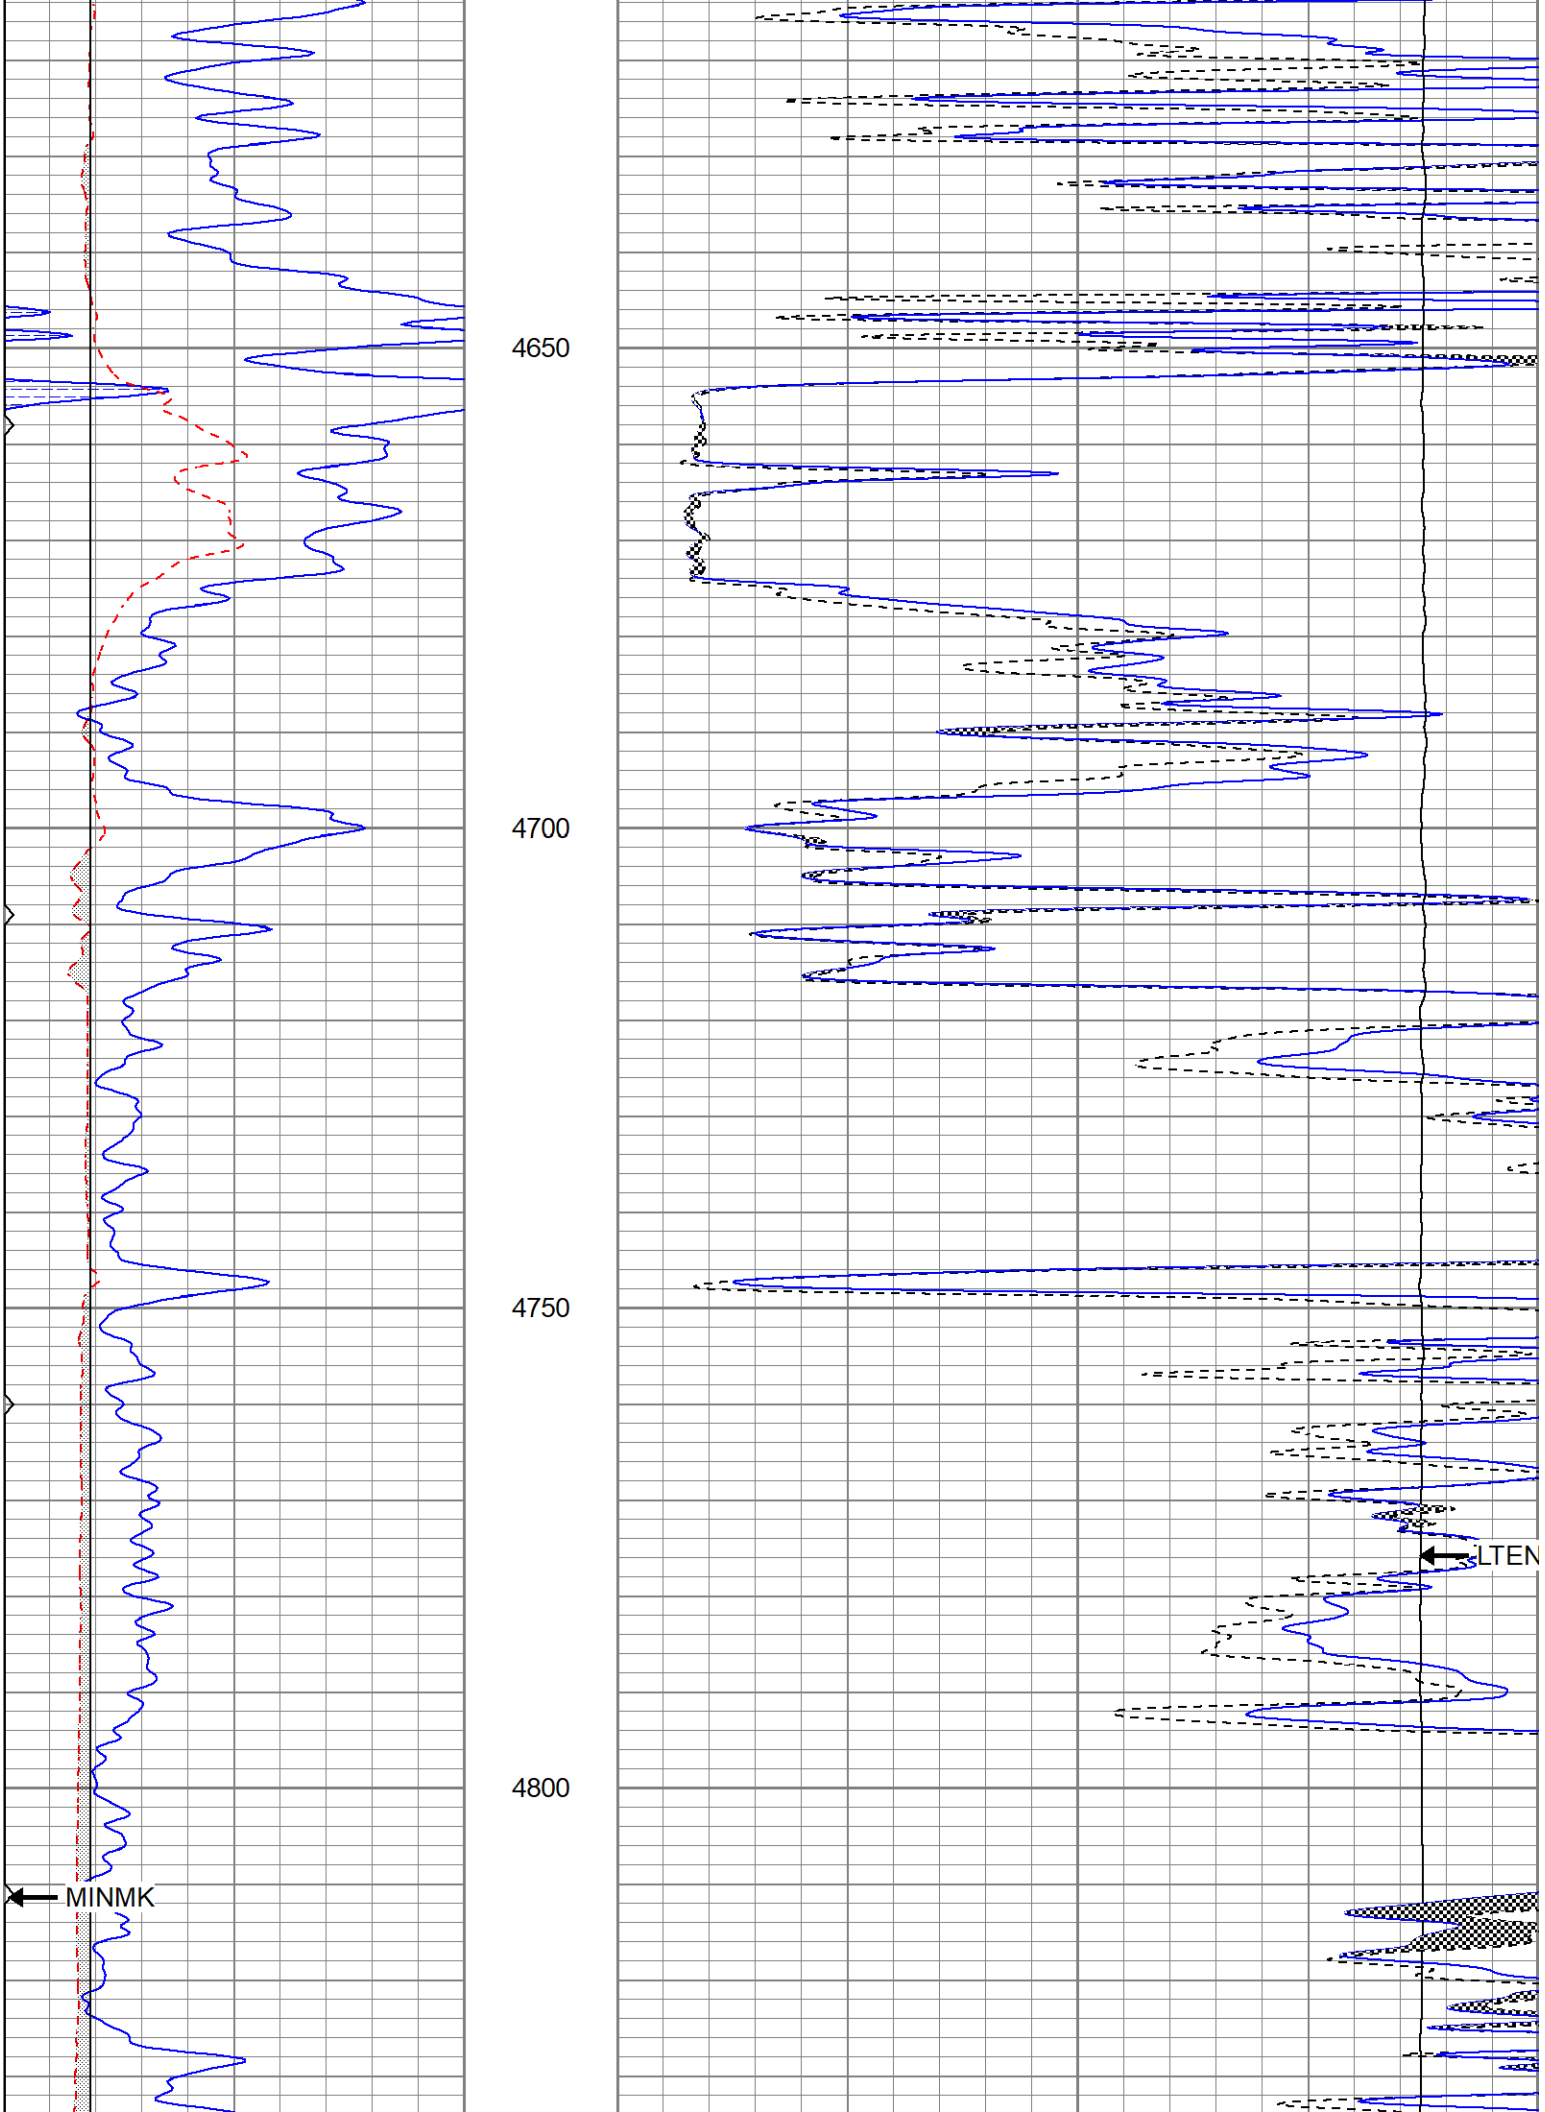
4650
4700
4750
4800
MINMK
LTEN

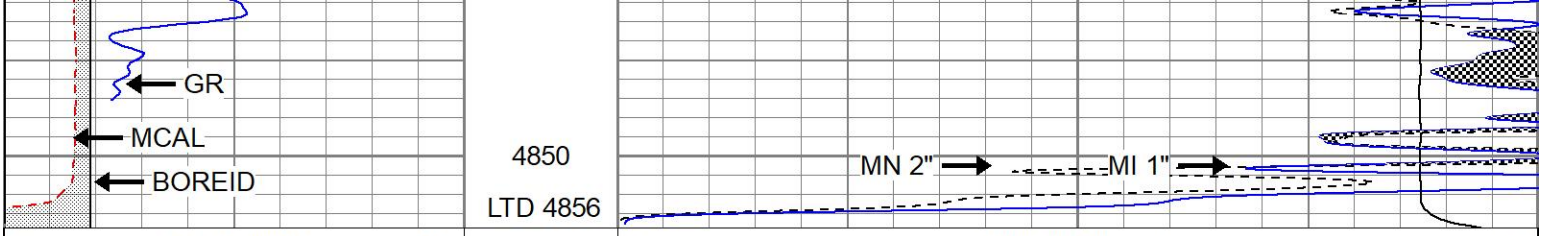

0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50

0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

REPEAT SECTION

Database File	ppthegreenmile#1oh.db
Dataset Pathname	pass4RP
Presentation Format	kml
Dataset Creation	Sat Nov 19 20:47:00 2022
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50

0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

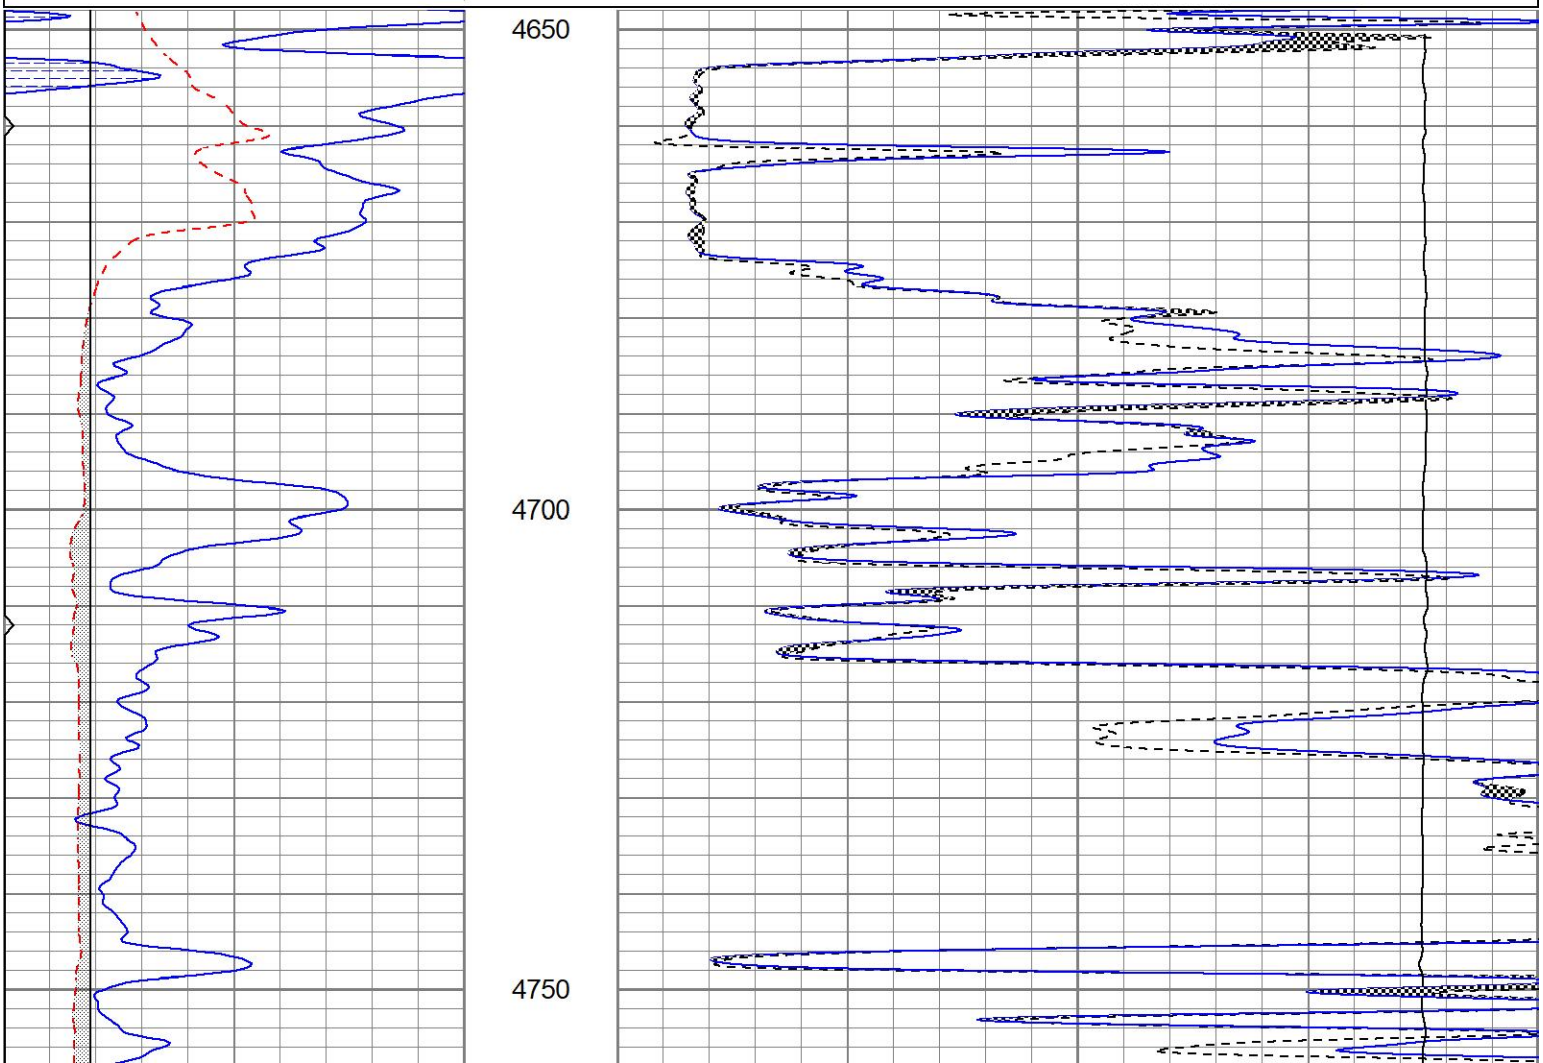

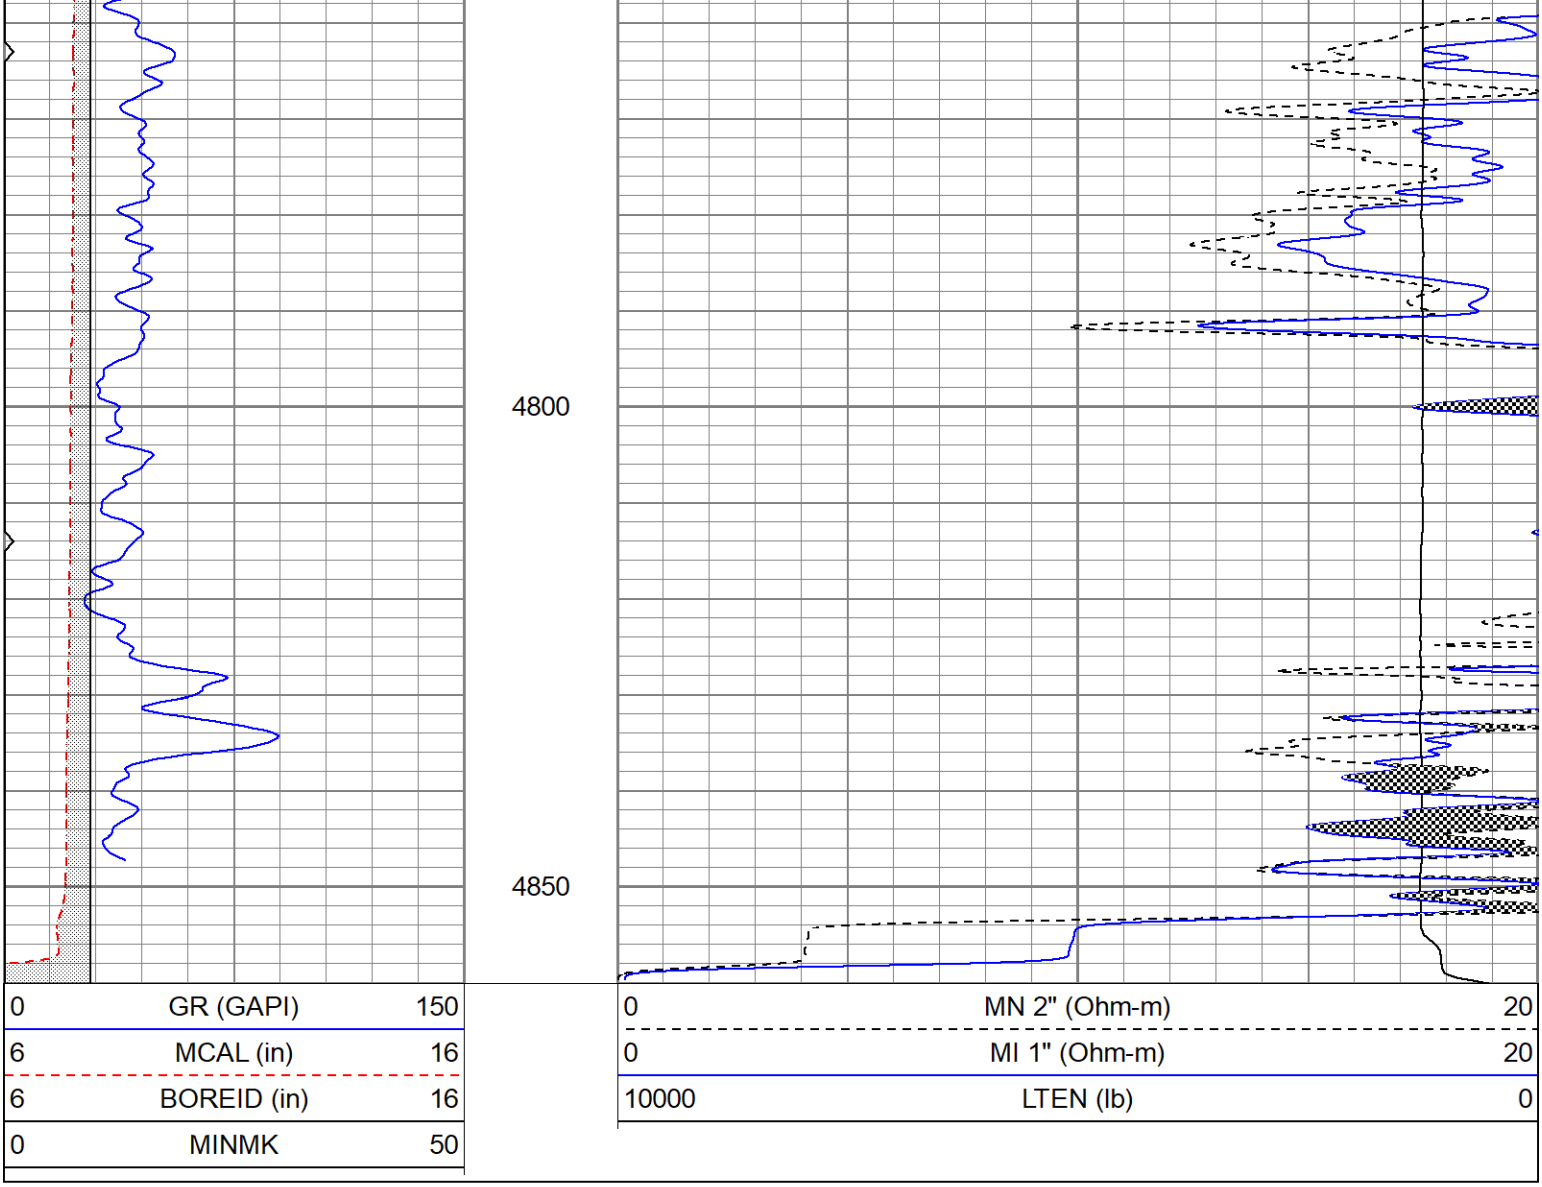

Calibration Report

Database File	ppthegreenmile#1oh.db
Dataset Pathname	pass4RP
Dataset Creation	Sat Nov 19 20:47:00 2022

Microlog Calibration Report

Serial-Model:	9151-Gerhart
Performed:	Tue Nov 8 22:42:02 2022

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	-0.0005	0.4781	V	0.0000	10.0000	Ohm-m	20.8940	0.0097
Inverse	-0.0100	0.6323	V	0.0000	10.0000	Ohm-m	15.5701	0.1555
Caliper	0.9057	2.2211	V	8.4000	15.0000	in	5.0175	2.9555

Gamma Ray Calibration Report

Serial Number:	2001	
Tool Model:	OH	
Performed:	Wed Jun 15 13:37:15 2022	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps

Sensitivity:	0.8200	GAPI/cps