

MICRO LOG

Company JASPAR COMPANY, INC.		Company JASPAR COMPANY, INC.	
Well	BJW #4	Well BJW #4	
Field	EDGAR SOUTHWEST	Field EDGAR SOUTHWEST	
County	ROOKS	County	ROOKS
State	KANSAS	State	KANSAS
Location:		API #: 15-163-24485-0000	Other Services
Permanent Datum		SEC 10 TWP 6S RGE 20W	CDL/CNL DIL/SON
Log Measured From		GROUND LEVEL Elevation	Elevation
Drilling Measured From		KELLY BUSHING 7' A.G.L	K.B. 2166 D.F. 2164 G.L. 2159
Date		7/17/23	
Run Number	TWO		
Depth Driller	3650		
Depth Logger	3644		
Bottom Logged Interval	3628		
Top Log Interval	3000		
Casing Driller	8 5/8 @ 218		
Casing Logger	218		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 900 PPM	
Density / Viscosity	9.2/58		
pH / Fluid Loss	11/7.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.40 @ 74F		
Rmf @ Meas. Temp	1.05 @ 74F		
Rmc @ Meas. Temp	1.68 @ 74F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.917 @ 113F		
Time Circulation Stopped	4 HOURS		
Time Logger on Bottom	10:30 P.M.		
Maximum Recorded Temperature	113F		
Equipment Number	8916		
Location	HAYS, KANSAS		
Recorded By	COLE ROBBEN		
Witnessed By	CAMERON BRIN		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395

DIRECTIONS:


NINE MILES NORTH OF STOCKTON, KANSAS TO 'A' ROAD, WEST THIRTEEN MILES ON 'A' ROAD TO 5 ROAD, SOUTH ON 5 ROAD ONE MILE AND A HALF, WEST INTO




MAIN SECTION

Database File	7704ddn.db
Dataset Pathname	pass6D
Presentation Format	_micro
Dataset Creation	Mon Jul 17 22:58:11 2023
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

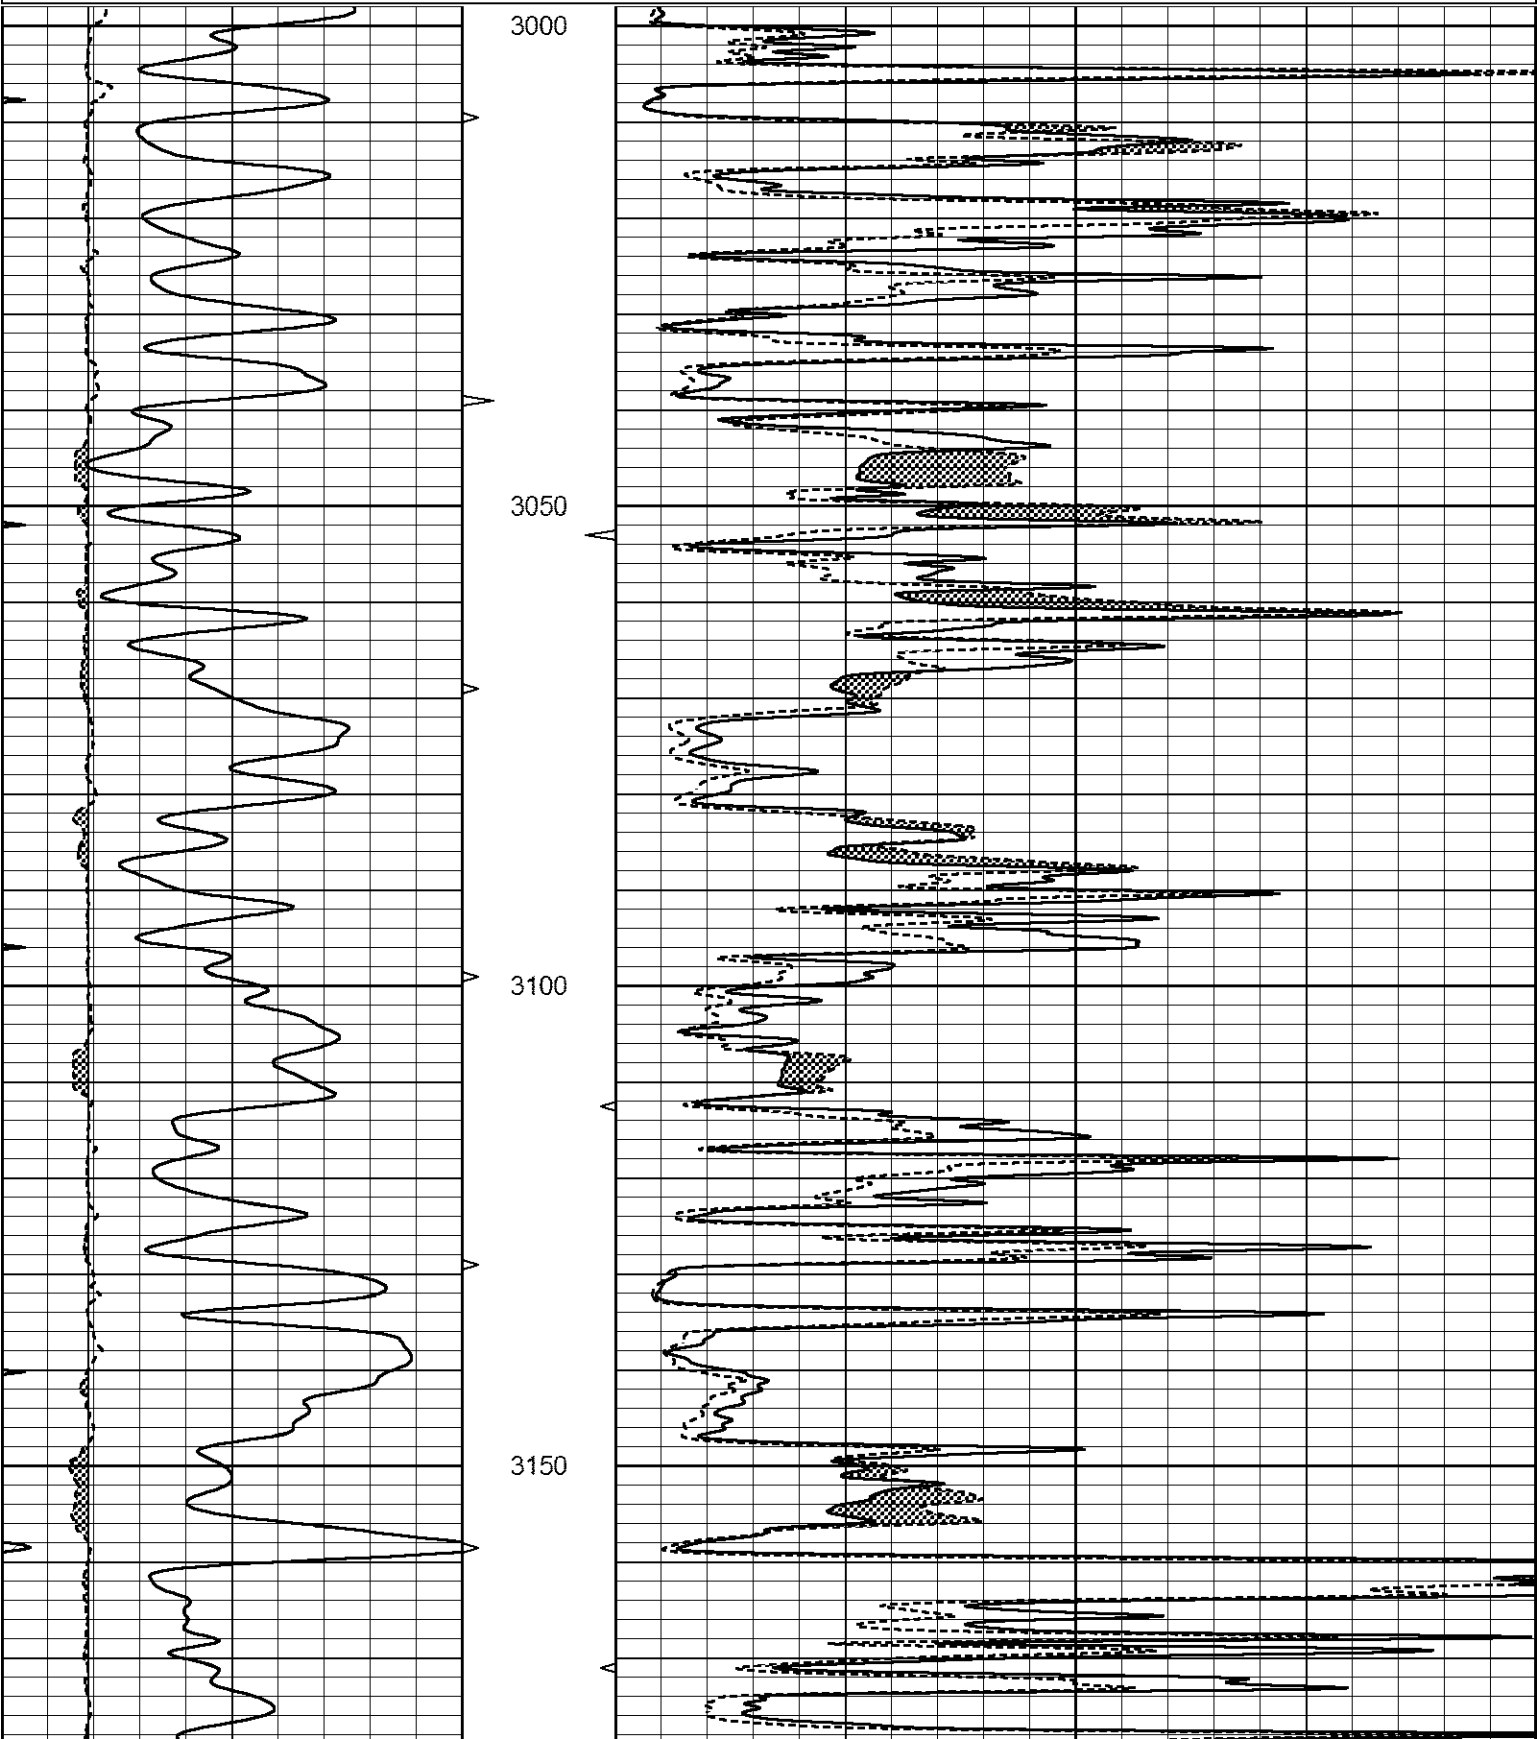

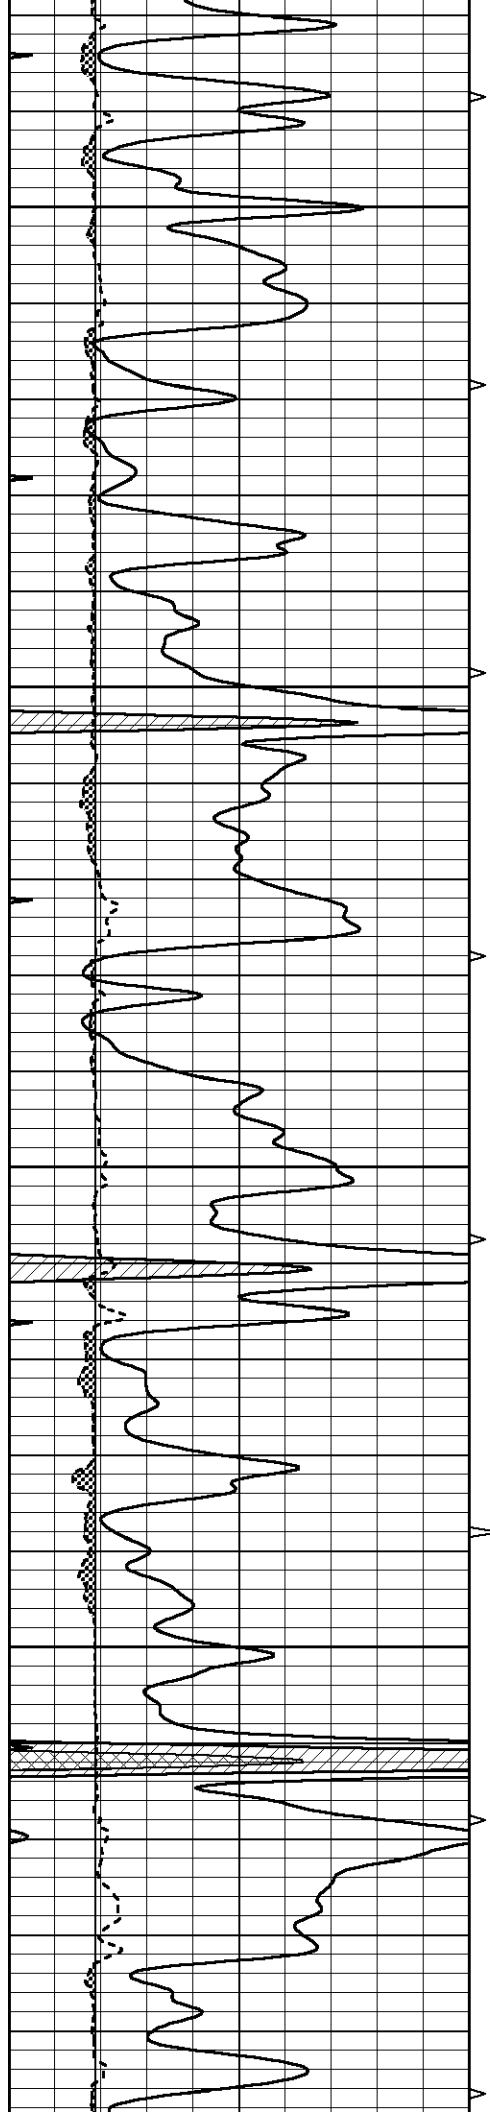



3200

3250

3300

3350

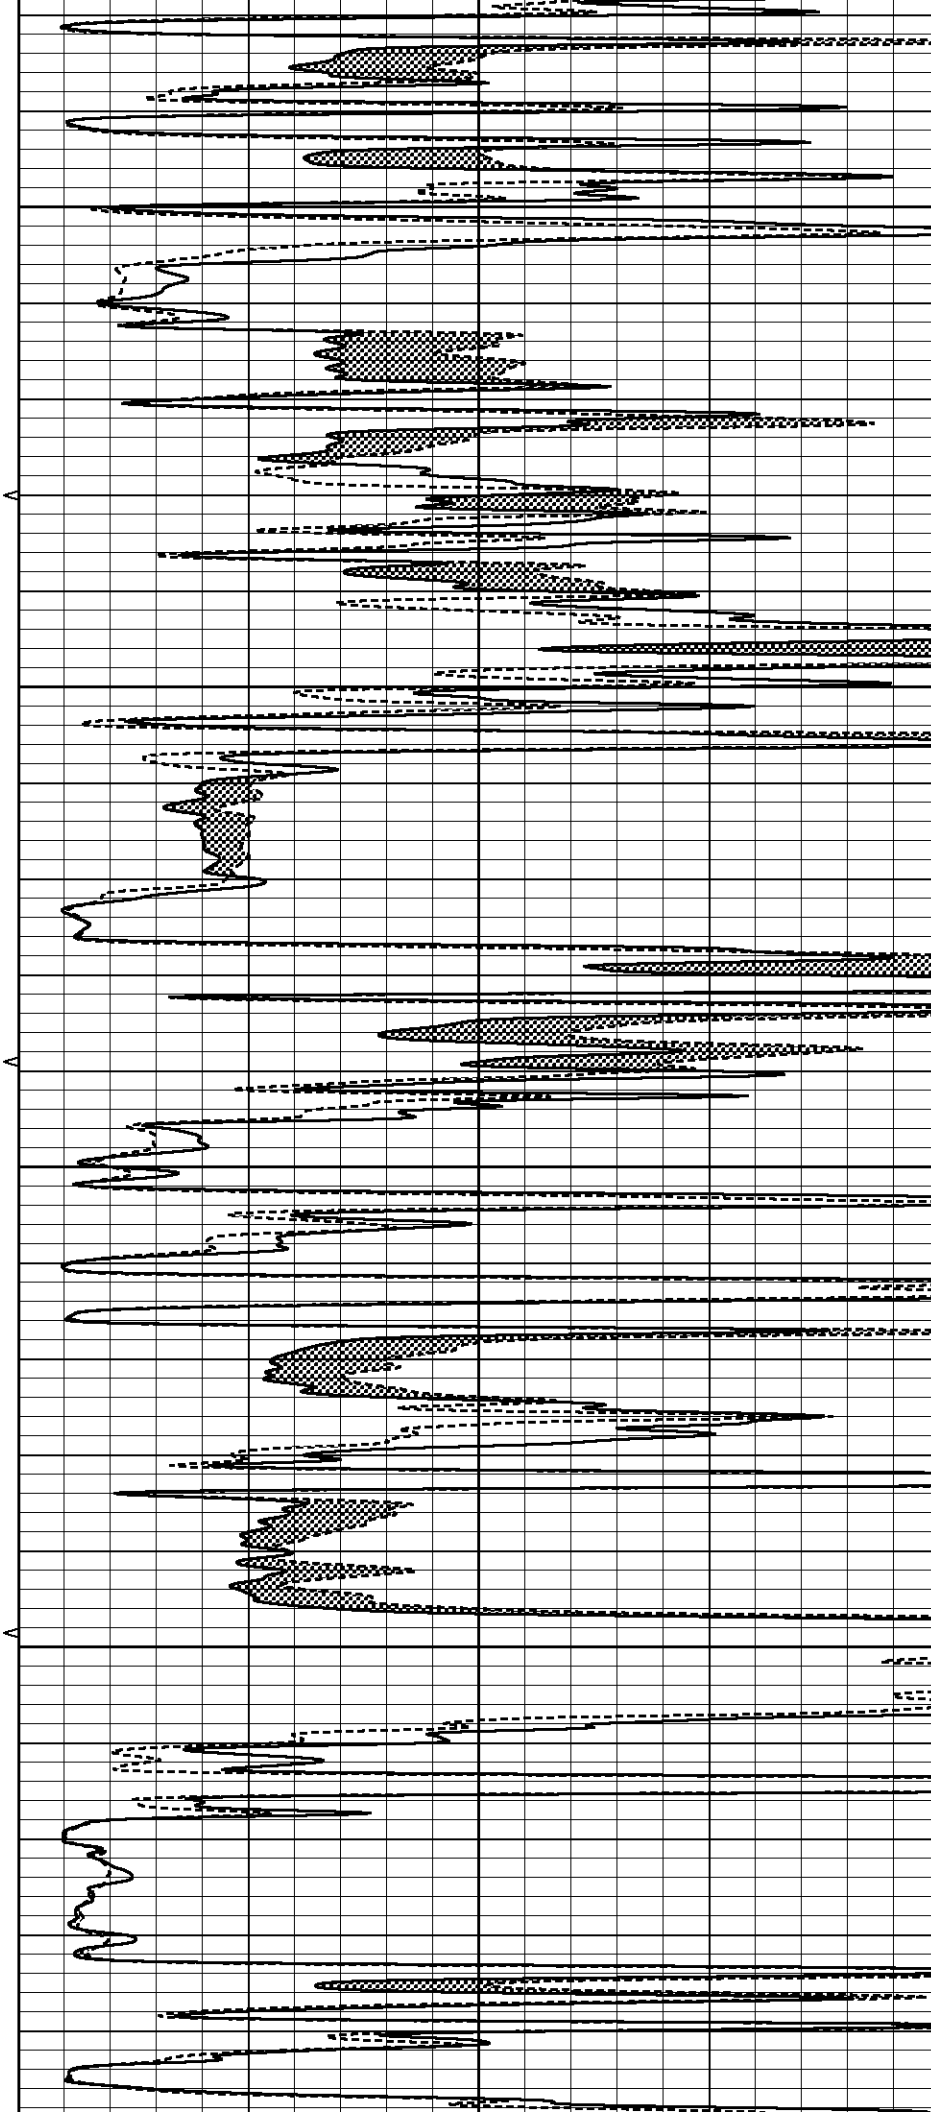

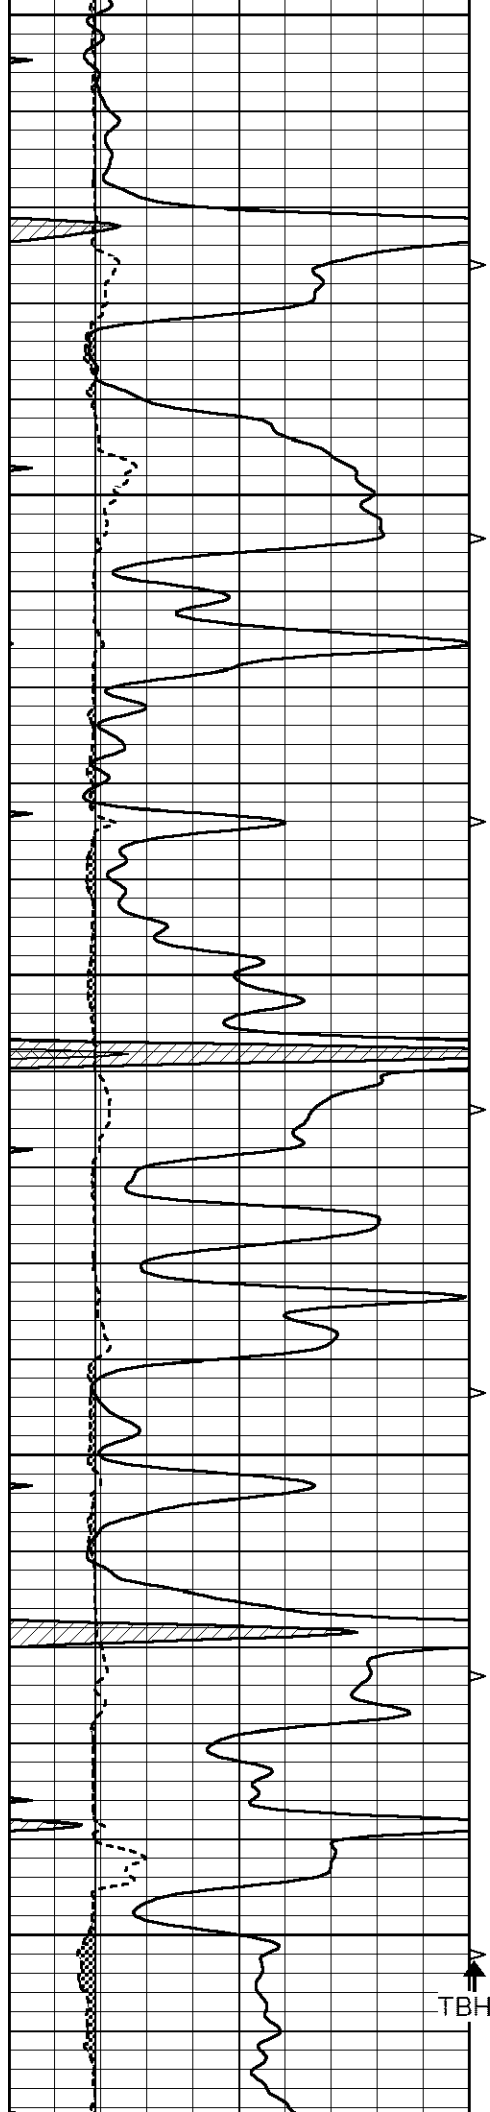

3400

3450


3500



3550

3600

5.5" ABHV



TBHV

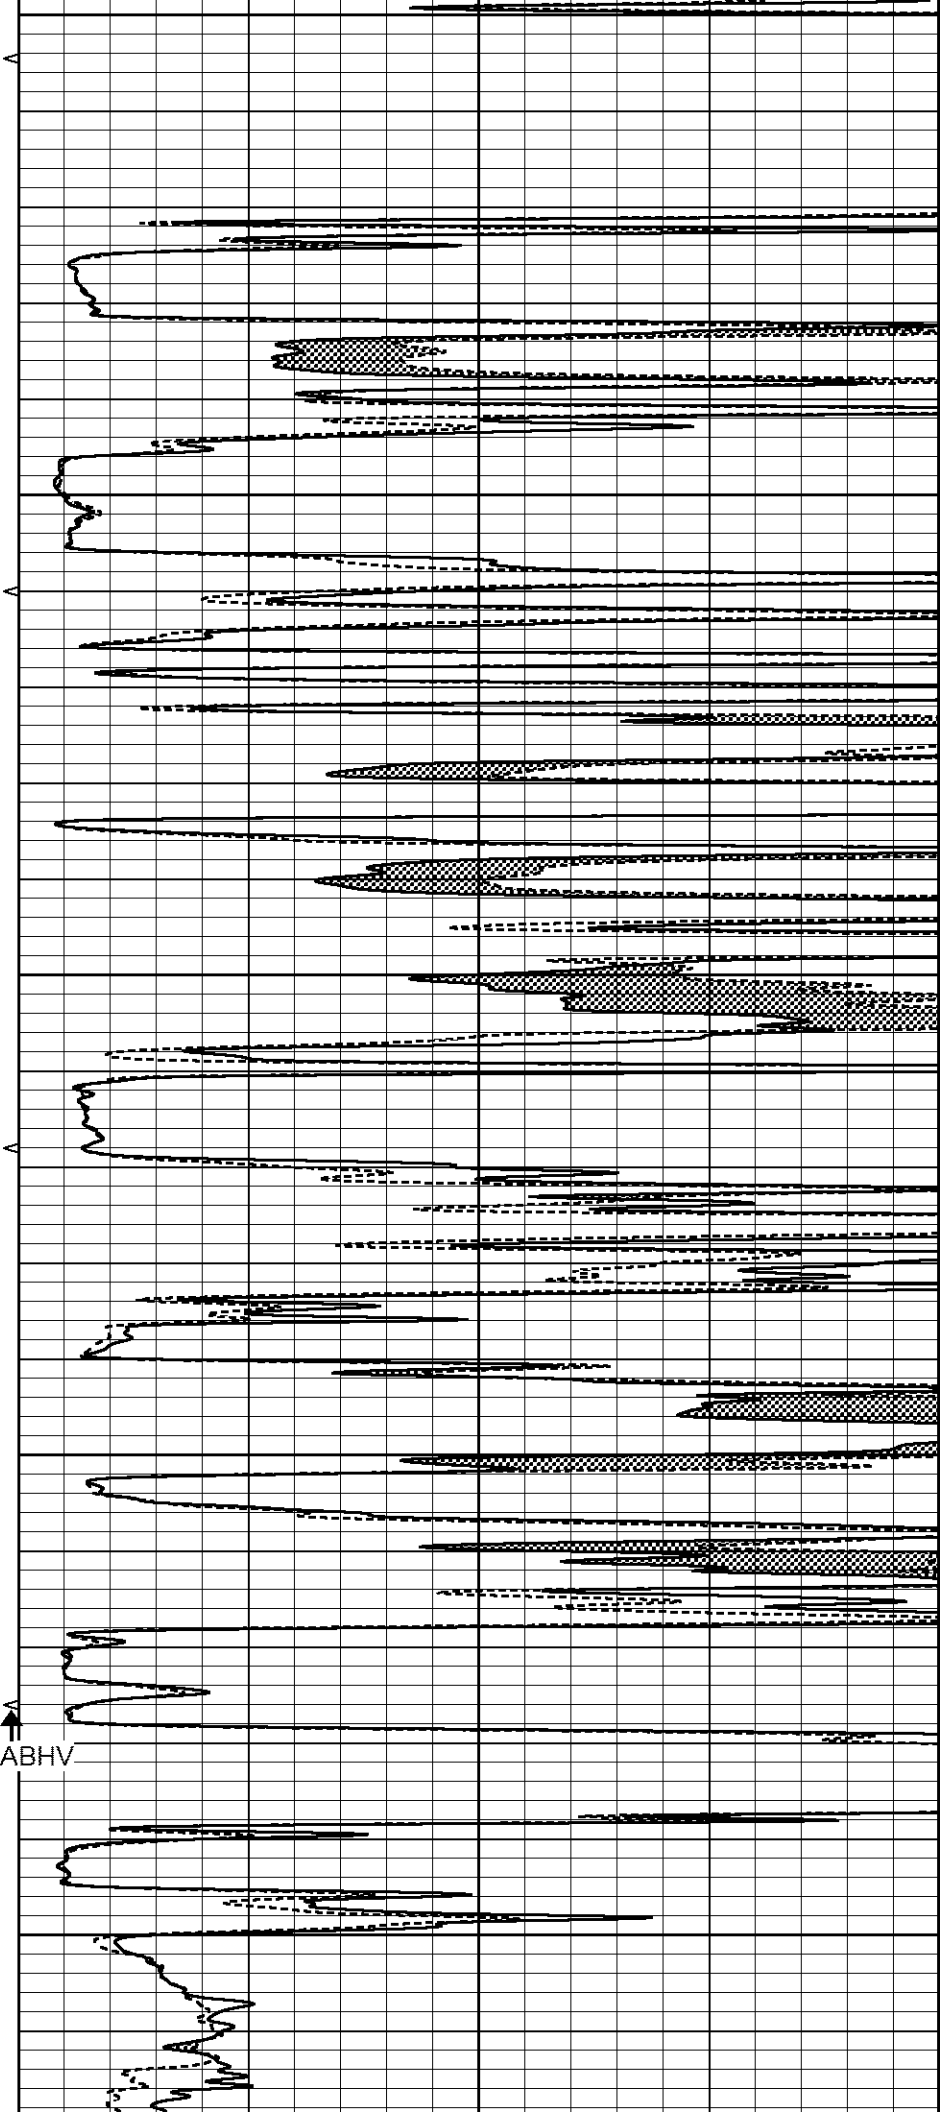


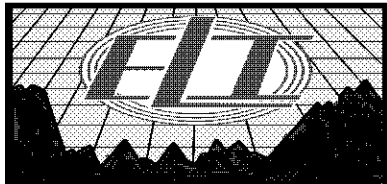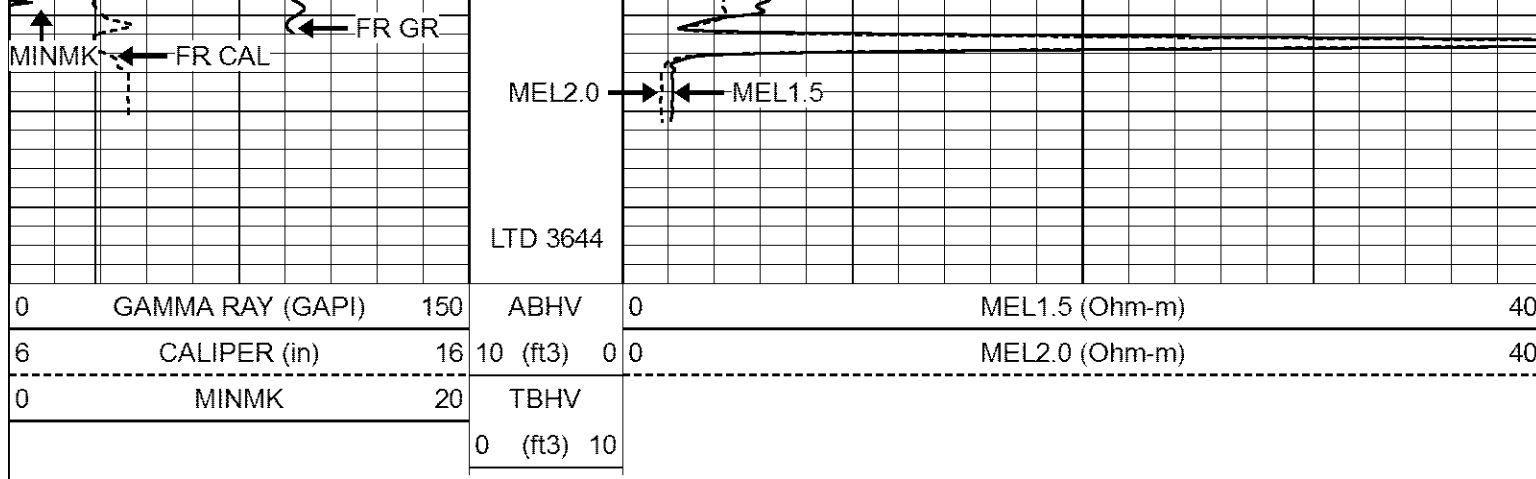

REPEAT SECTION

Database File 7704ddn.db
 Dataset Pathname pass5.1
 Presentation Format _micro
 Dataset Creation Mon Jul 17 23:02:29 2023
 Charted by Depth in Feet scaled 1:240

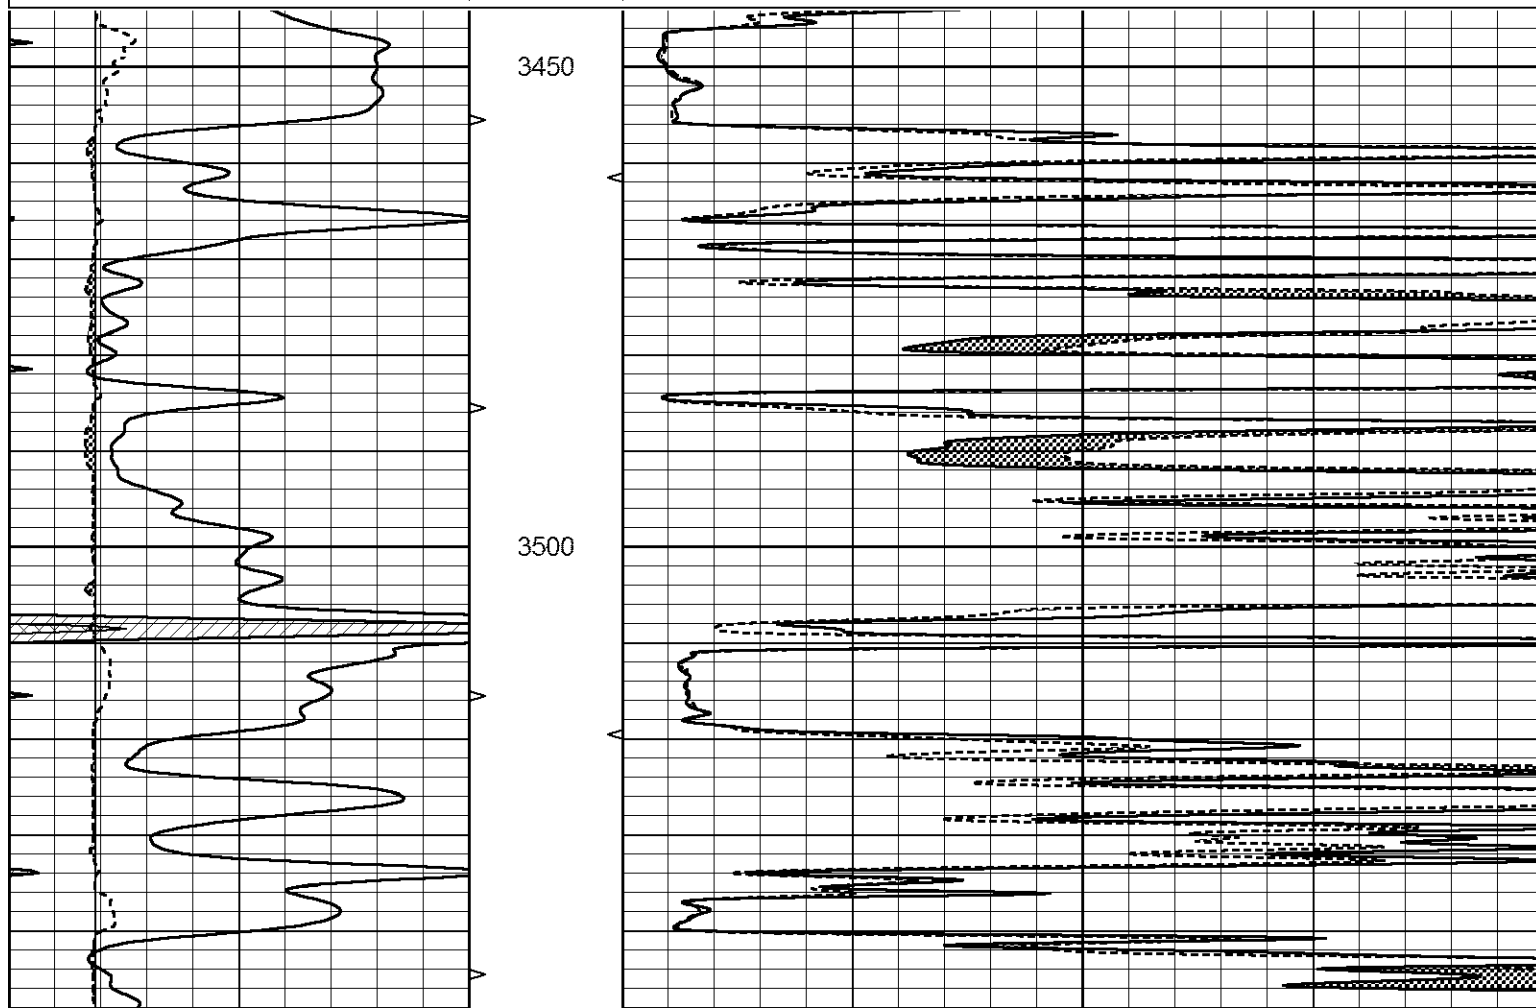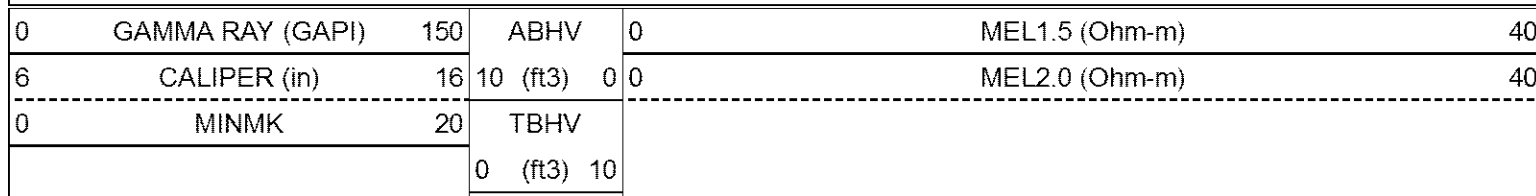

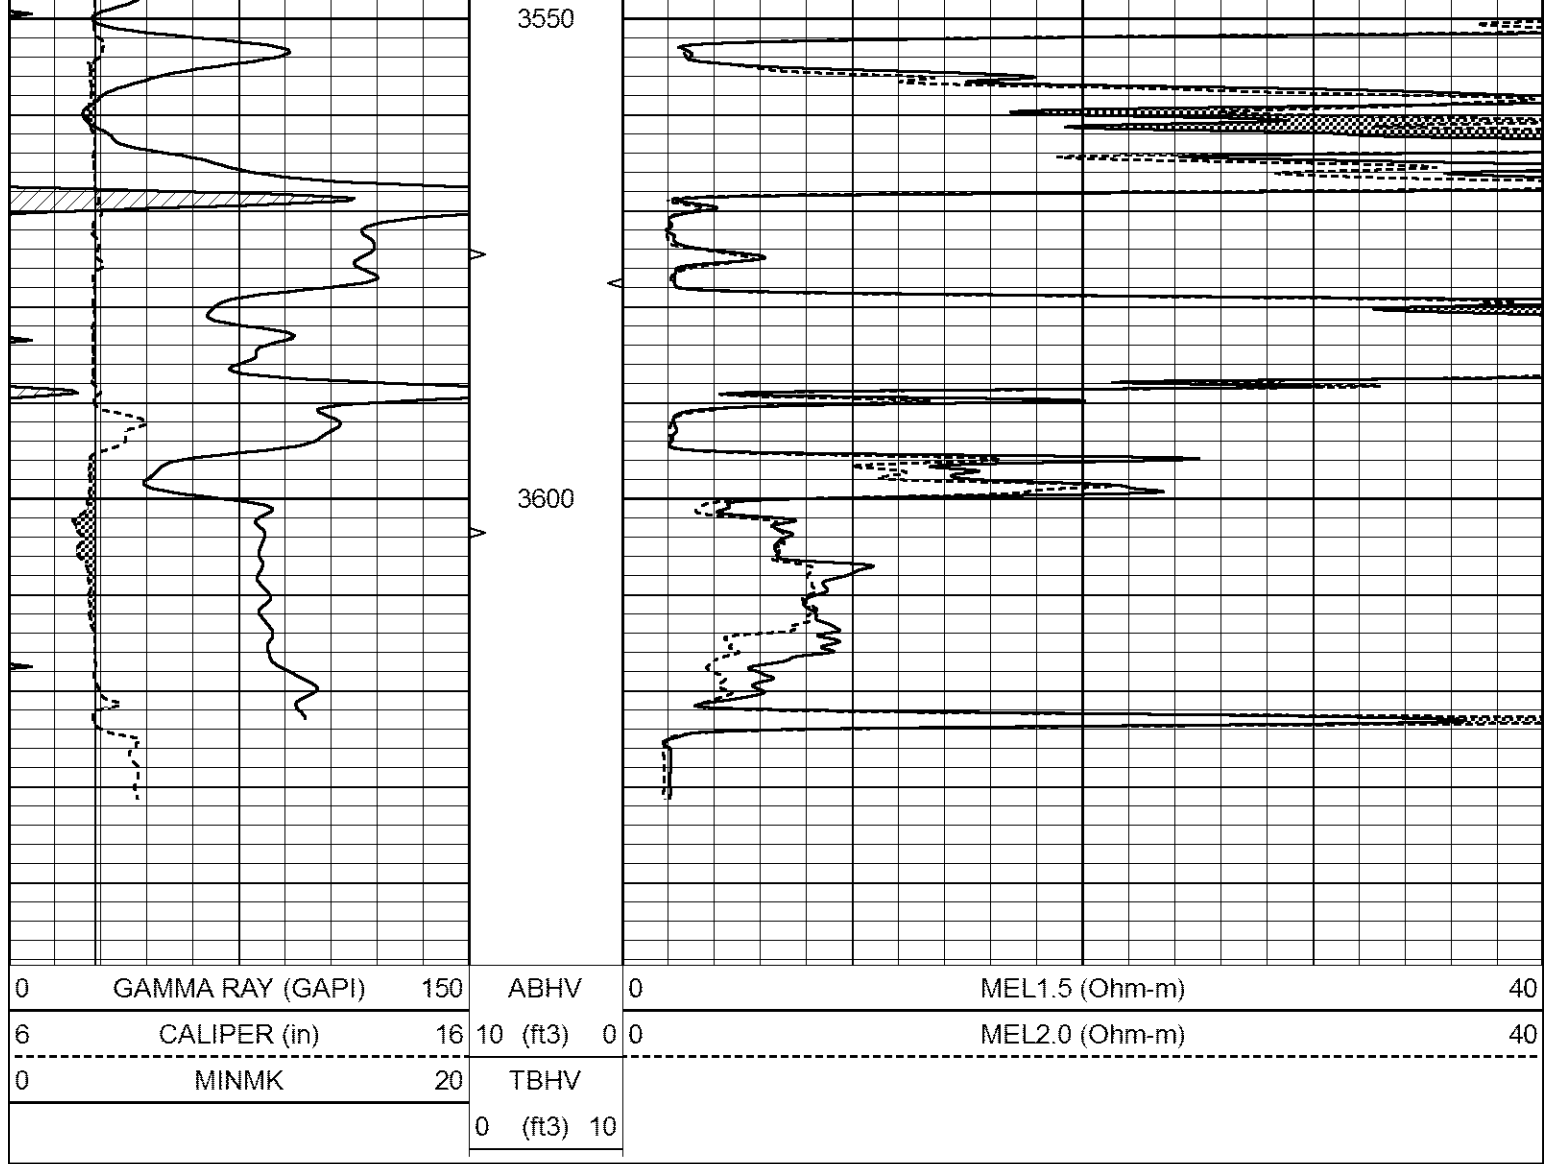

Calibration Report			
Database File	7704ddn.db		
Dataset Pathname	pass6D		
Dataset Creation	Mon Jul 17 22:58:11 2023		
MICRO_USR Calibration Report			
Serial Number:	070911		
Tool Model:	ProbeL		
Performed:	Tue Jun 27 10:27:40 2023		
Caliper Calibration:	Gain=4.500	Offset=0.160	
	Low Cal	High Cal	
References	8.000	14.000	
Readings	1.451	3.049	
1.5" Calibration:	Gain=30.000	Offset=-0.500	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.004	0.843	
2" Calibration:	Gain=38.000	Offset=-0.500	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.021	0.810	

Microlog Calibration Report

Serial-Model:
Performed:070911-ProbeL
Sat May 14 04:48:25 2022

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0002	0.4836	V	0.0000	10.0000	Ohm-m	20.6908	-0.0051
Inverse	0.0018	0.6297	V	0.0000	10.0000	Ohm-m	15.9263	-0.0282
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000

Gamma Ray Calibration Report

Serial Number: 070558
Tool Model: Probe1
Performed: Mon Jul 17 10:21:25 2023

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps
Calibrator Reading: 1.0 cps

Sensitivity: 0.2900 GAPI/cps