



MICRO LOG

Company	RJM COMPANY	Company	RJM COMPANY
Well	AMES UNIT #17	Well	AMES UNIT #17
Field	AMES	Field	AMES
County	BARTON	County	BARTON
State	KANSAS	State	KANSAS
Location:	API # : 15-009-26415-0000	Other Services	CDL/CNL DIL
Permanent Datum	GROUND LEVEL	Elevation	1771
Log Measured From	KELLY BUSHING 10' A.G.L	Elevation	K.B. 1781 D.F. 1779 G.L. 1771
Drilling Measured From	KELLY BUSHING		
Date	4/23/24		
Run Number	TWO		
Depth Driller	3325		
Depth Logger	3324		
Bottom Logged Interval	3322		
Top Log Interval	2700		
Casing Driller	8.625@250		
Casing Logger	266		
Bit Size	7.785		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES	8,000 PPM
Density / Viscosity	9.1/55		
pH / Fluid Loss	8.5/11.6		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.420@62F		
Rmf @ Meas. Temp	.315@62F		
Rmc @ Meas. Temp	.504@62F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.237@110F		
Time Circulation Stopped	9.5 HOURS		
Time Logger on Bottom	11:15 P.M.		
Maximum Recorded Temperature	110F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	JIM MUSGROVE		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-009-26415-0000

Comments


THANK YOU FOR USING ELI WIRELINE HAYS. KANSAS (785) 628-6395
DIRECTIONS
CLAFLIN, KS. & HWY 4, 5S. ON BLKTOP, 1E., 1/2S., W. INTO




MAIN SECTION

Database File	8492ddn.db
Dataset Pathname	pass6.1
Presentation Format	micro
Dataset Creation	Wed Apr 24 00:27:17 2024
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

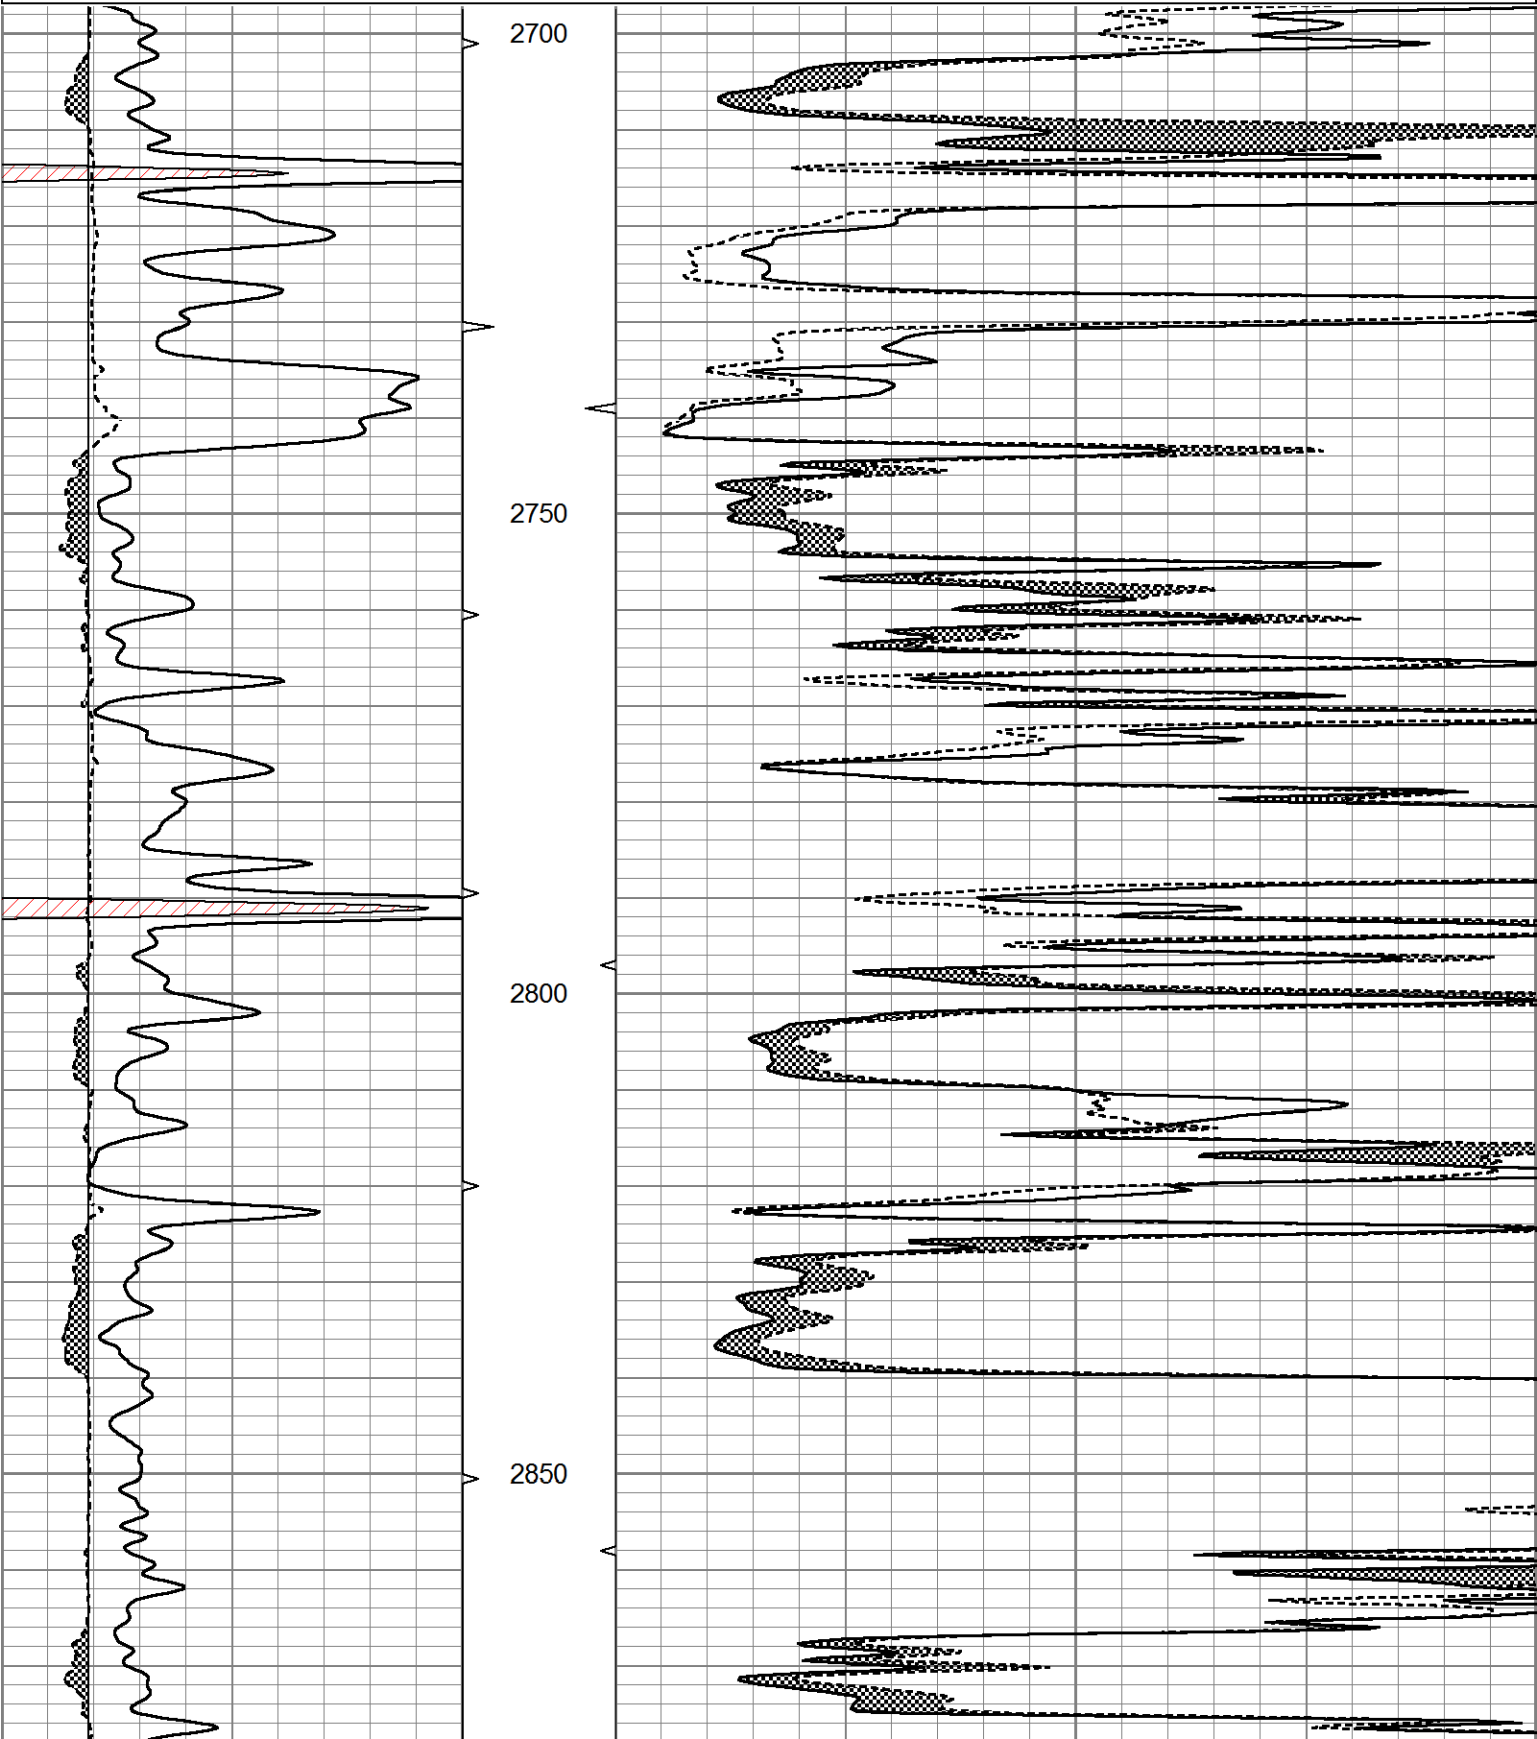

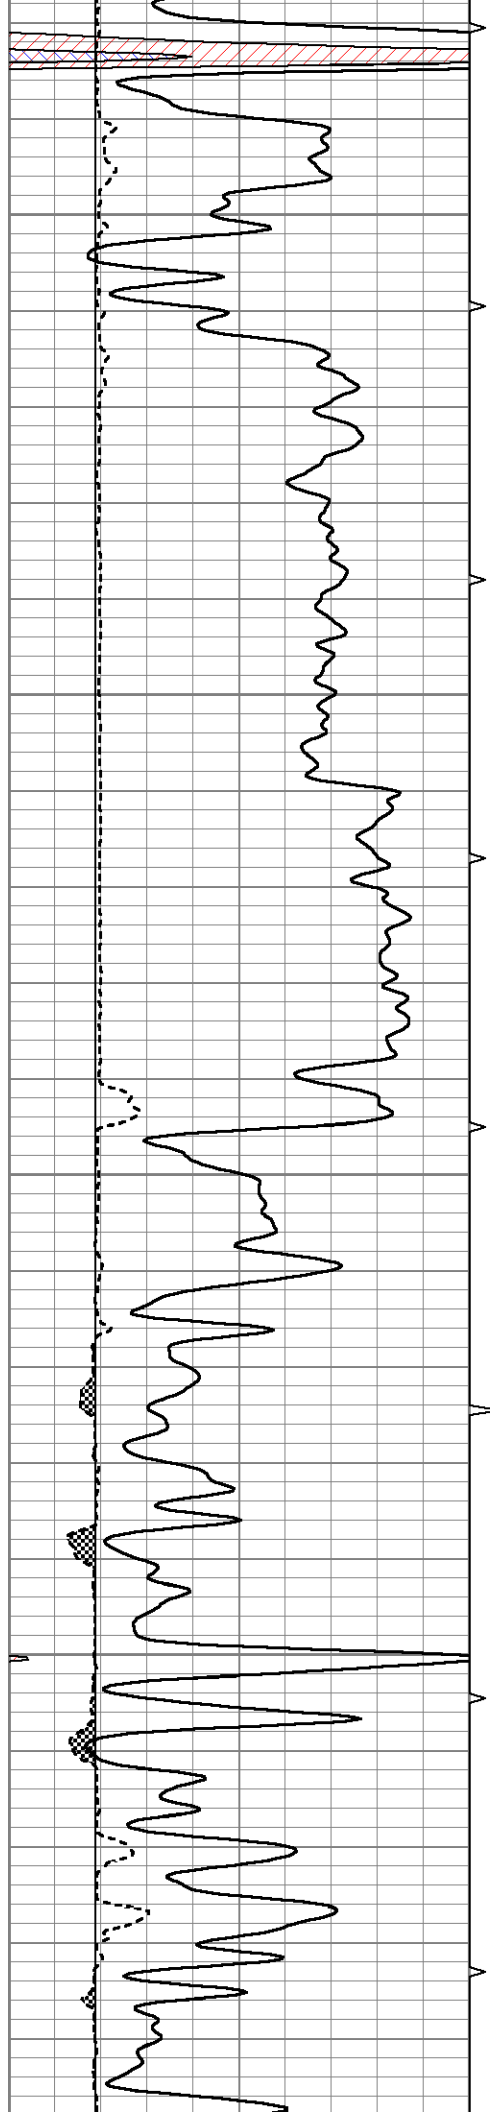



2900


2950

3000

3050


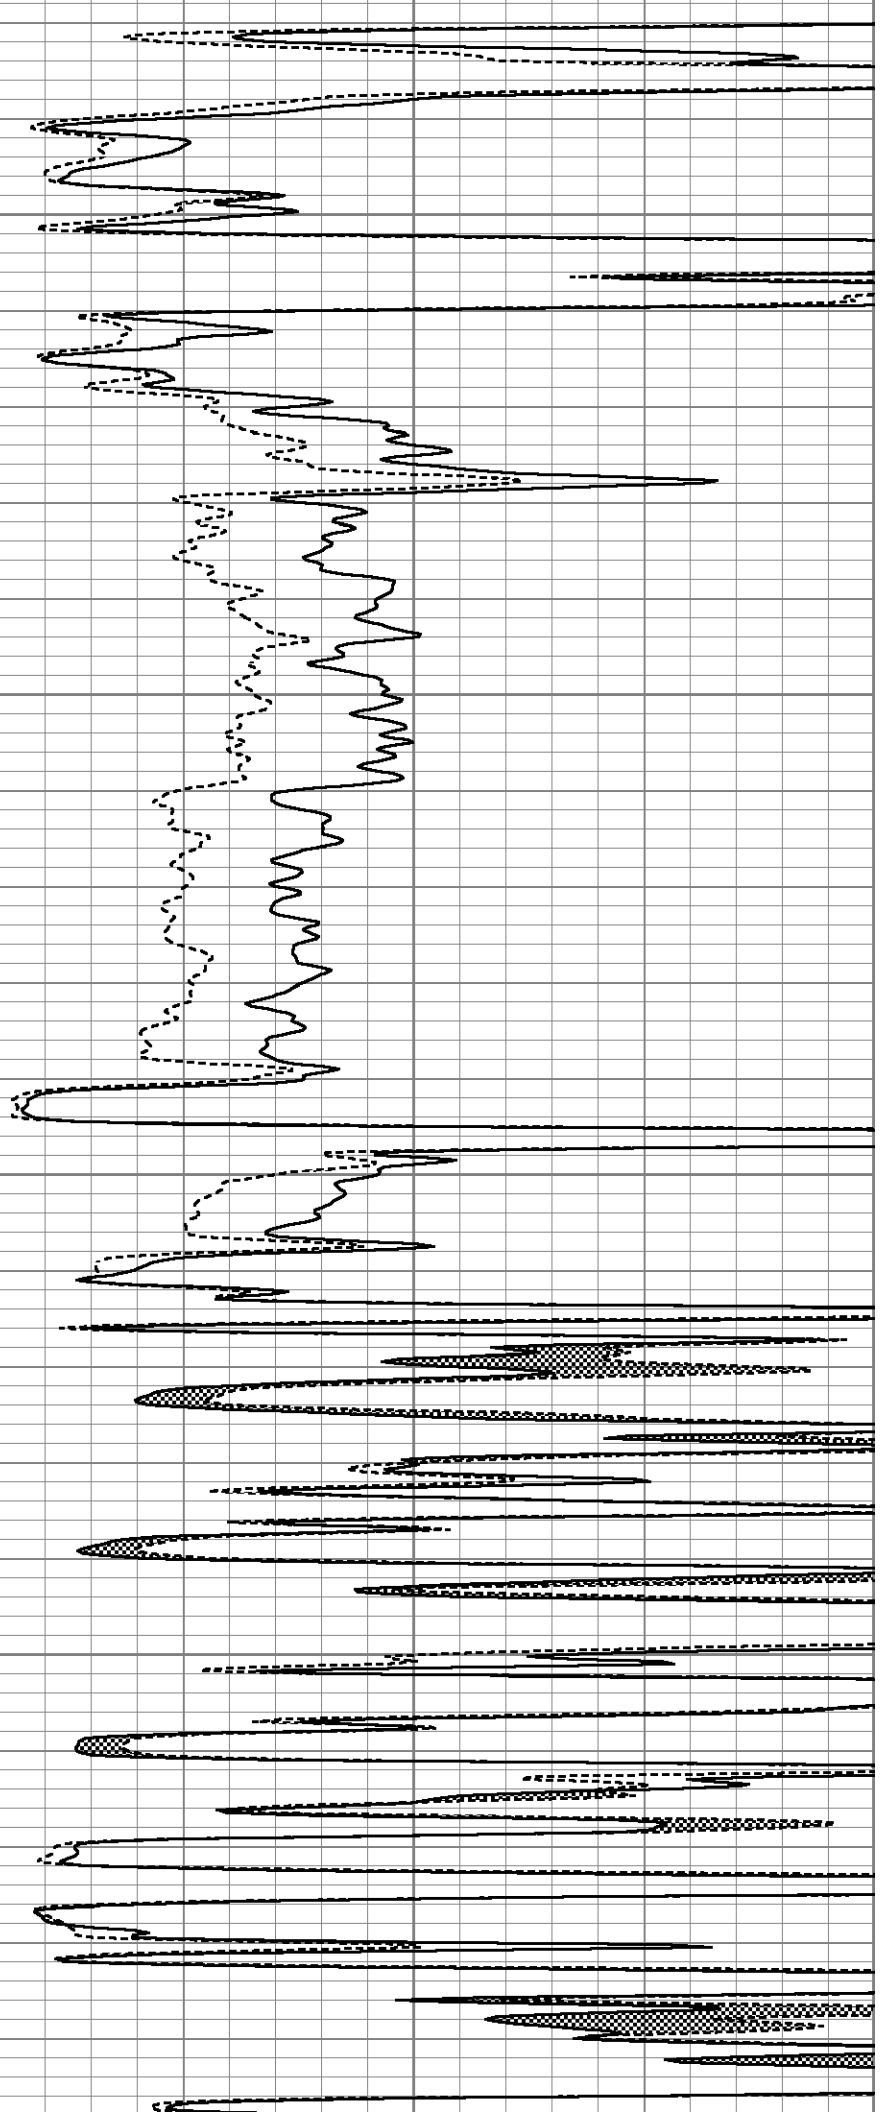


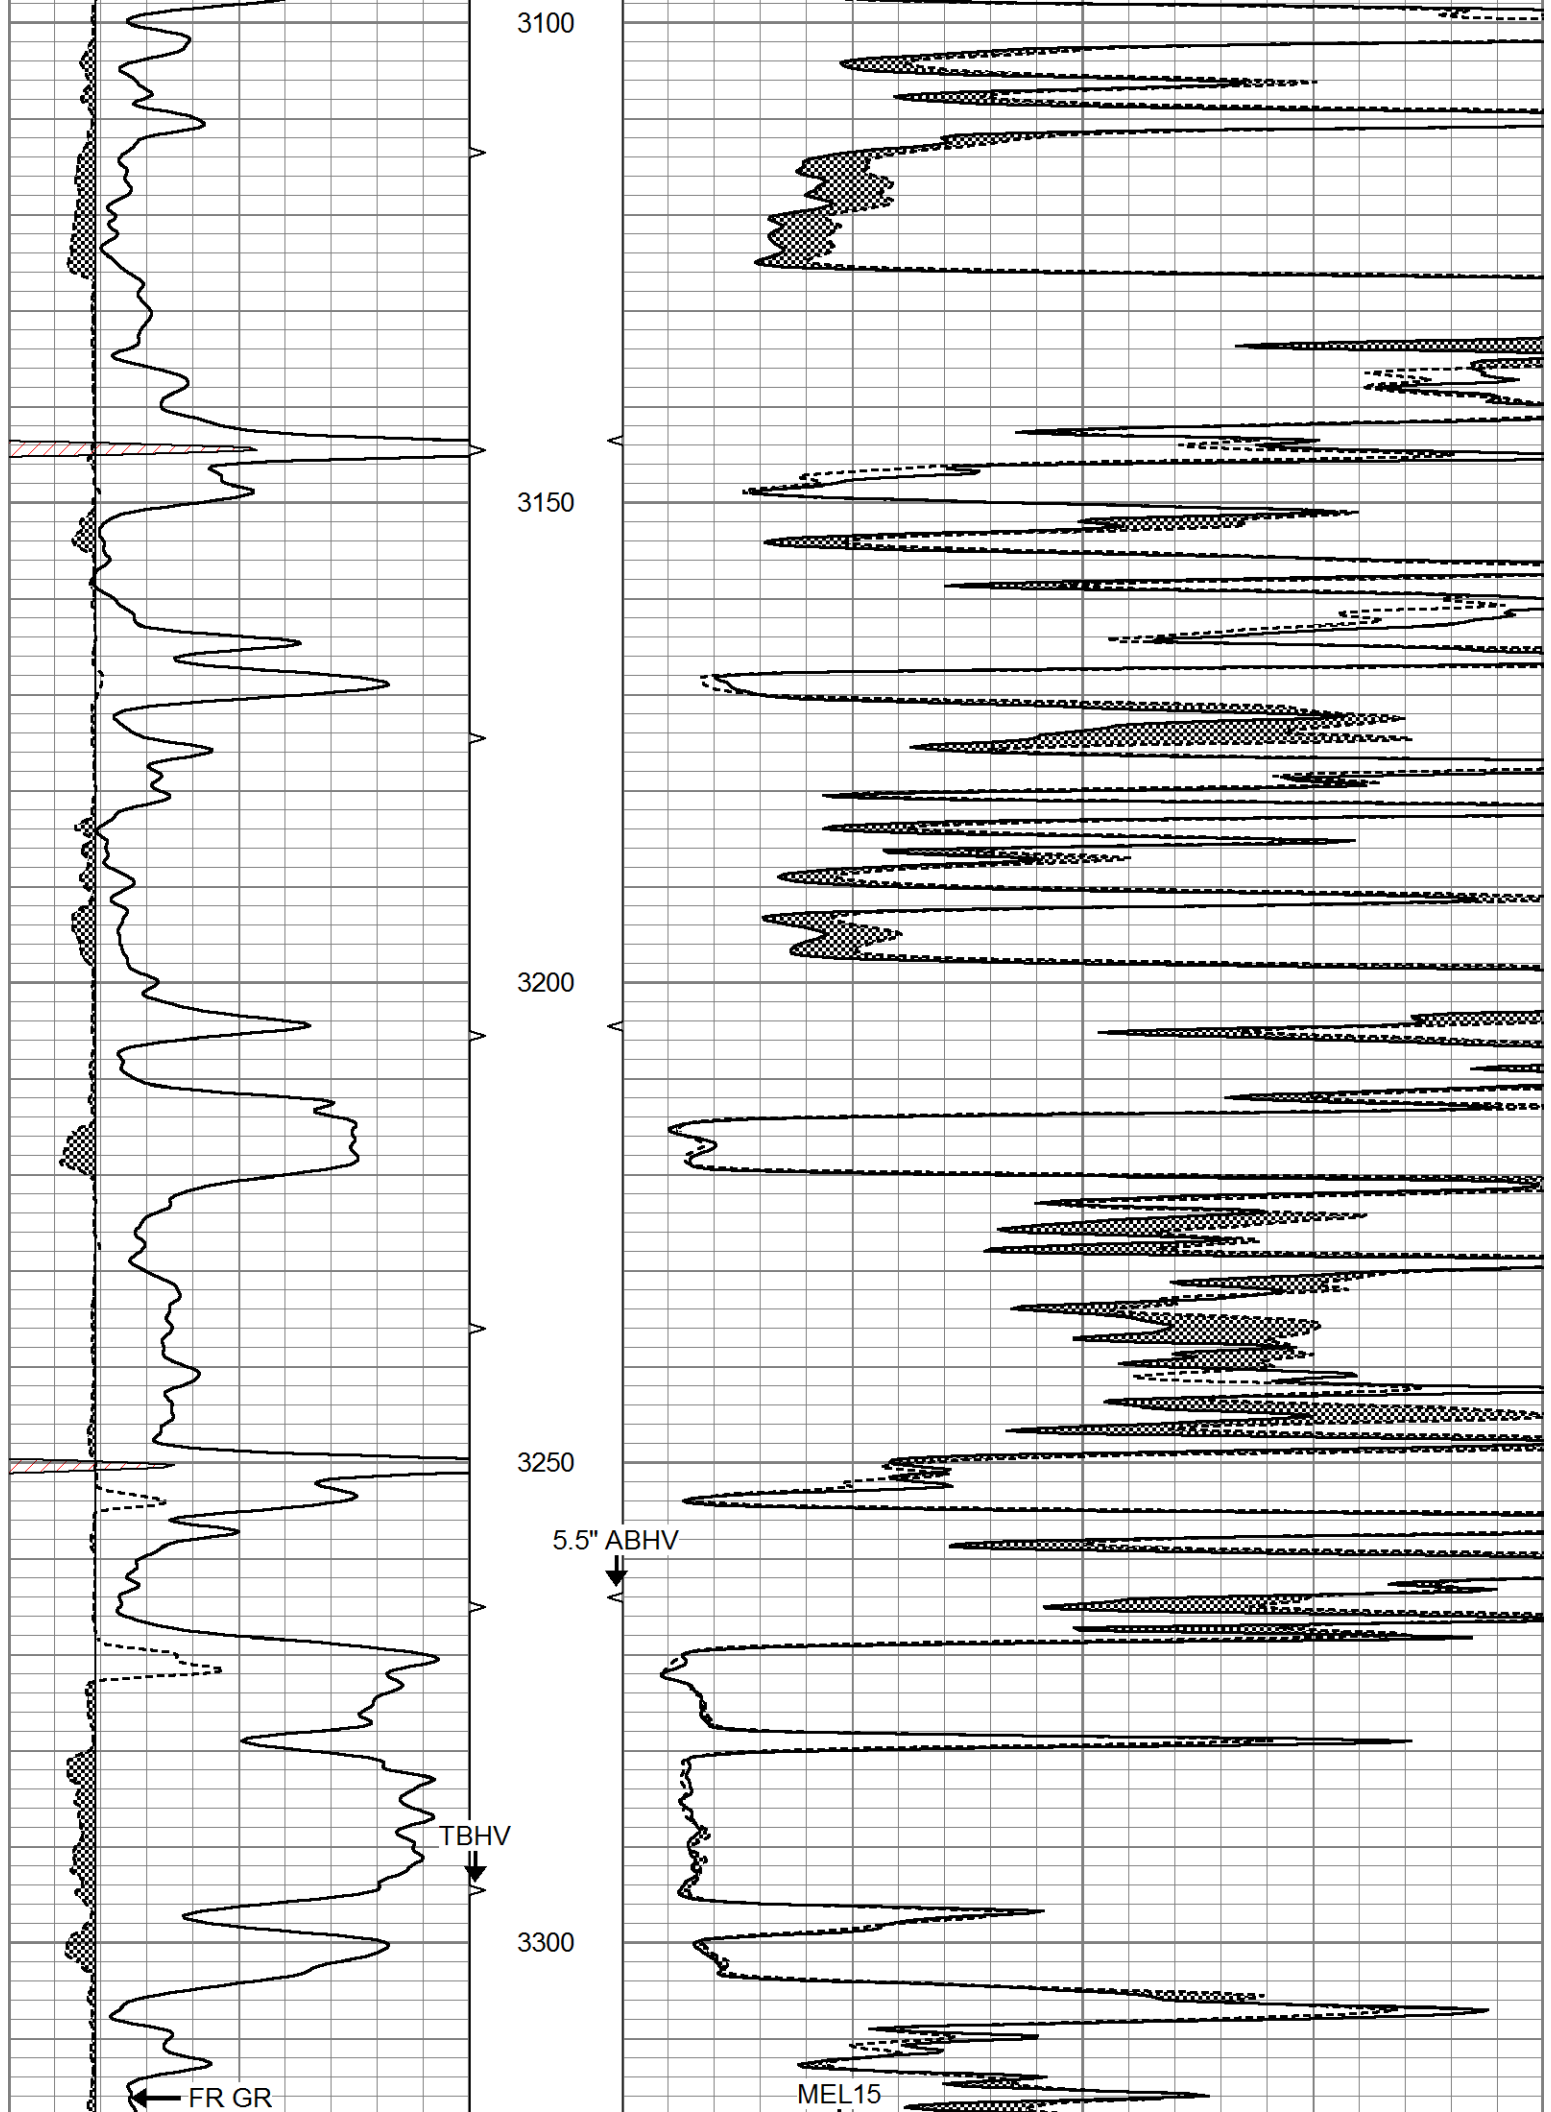


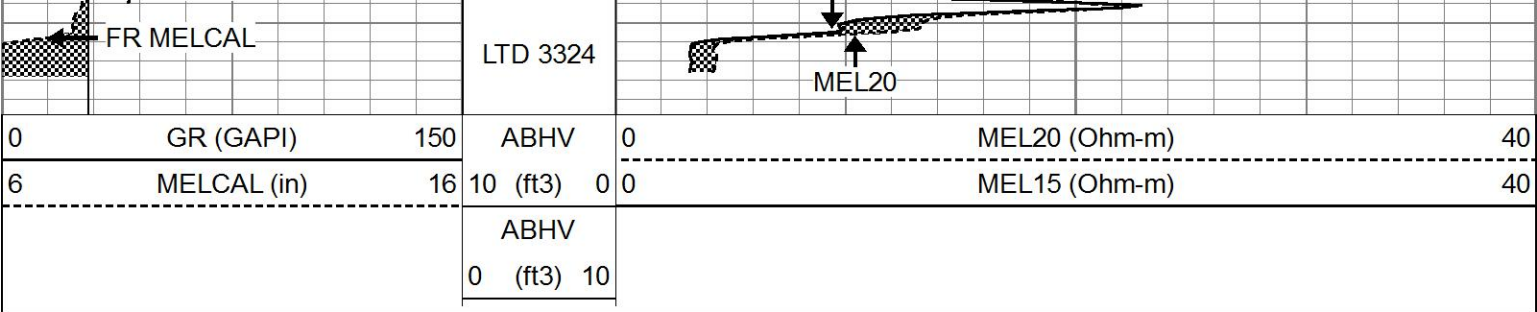

REPEAT SECTION

Database File	8492ddn.db
Dataset Pathname	pass5.1
Presentation Format	micro
Dataset Creation	Wed Apr 24 00:35:03 2024
Charted by	Depth in Feet scaled 1:240

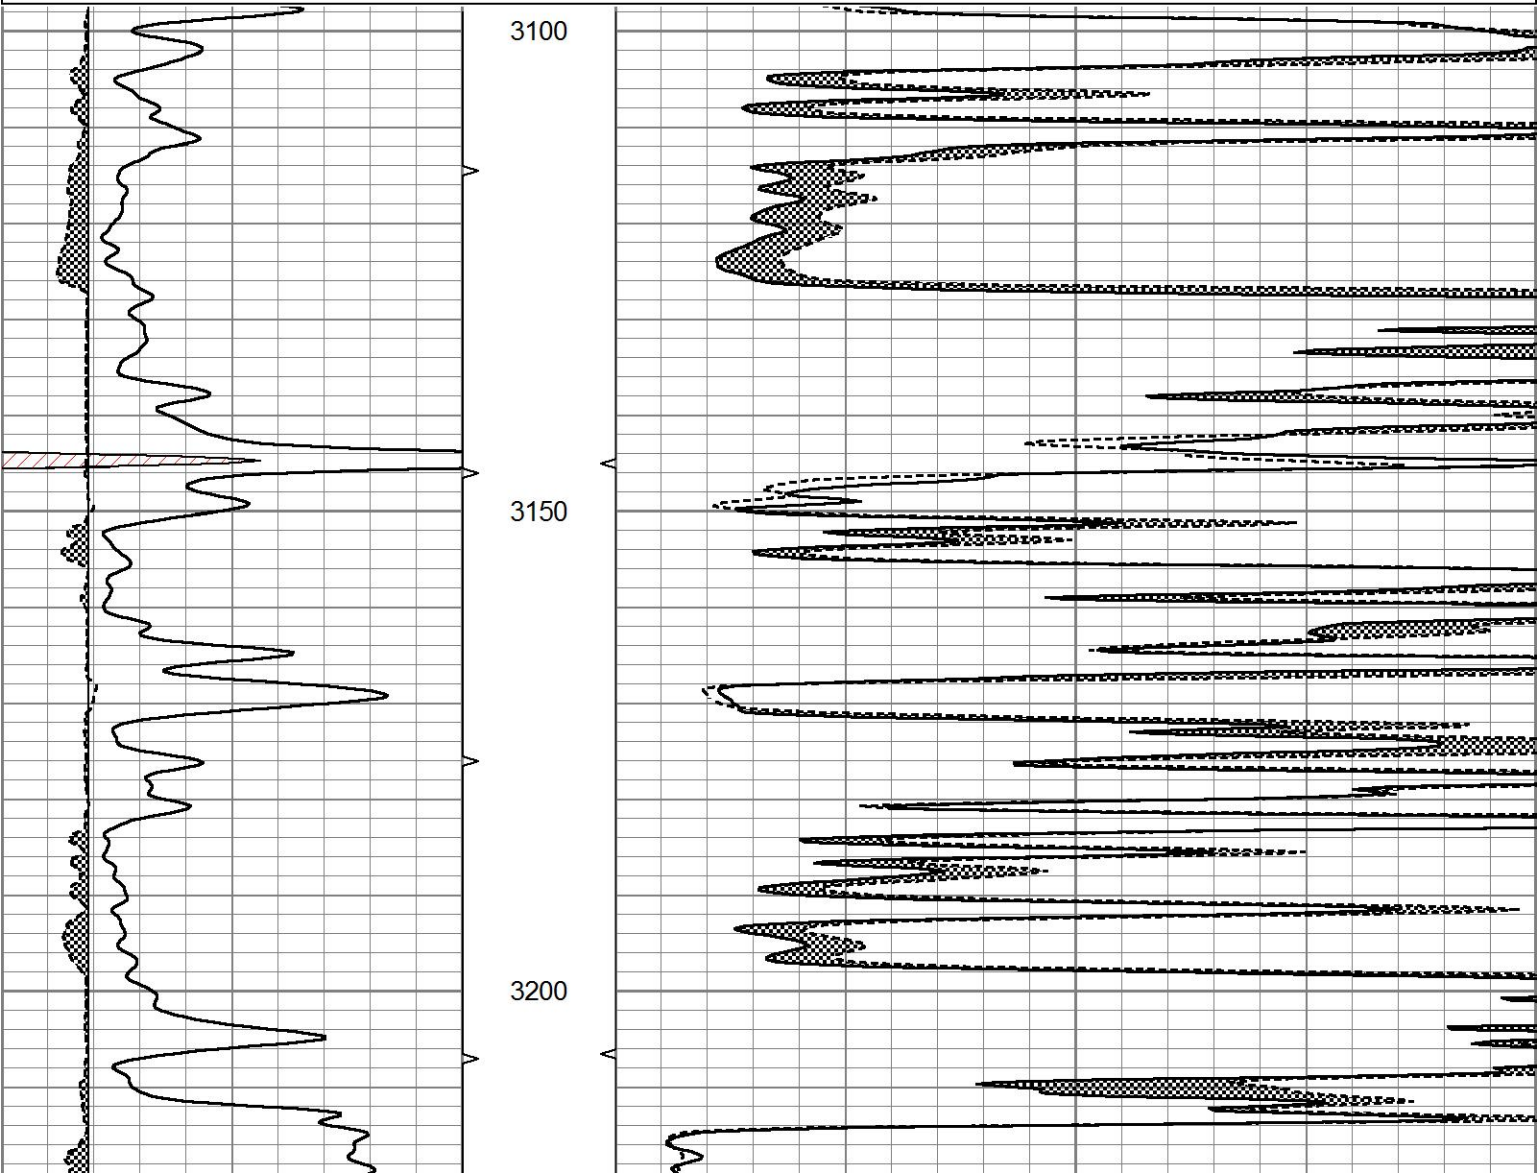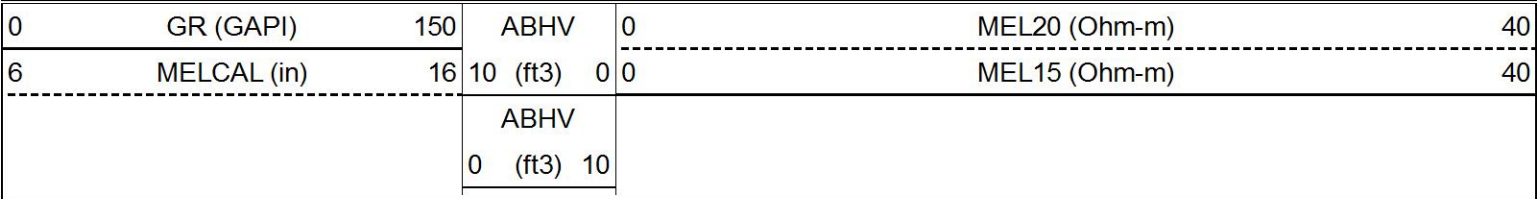

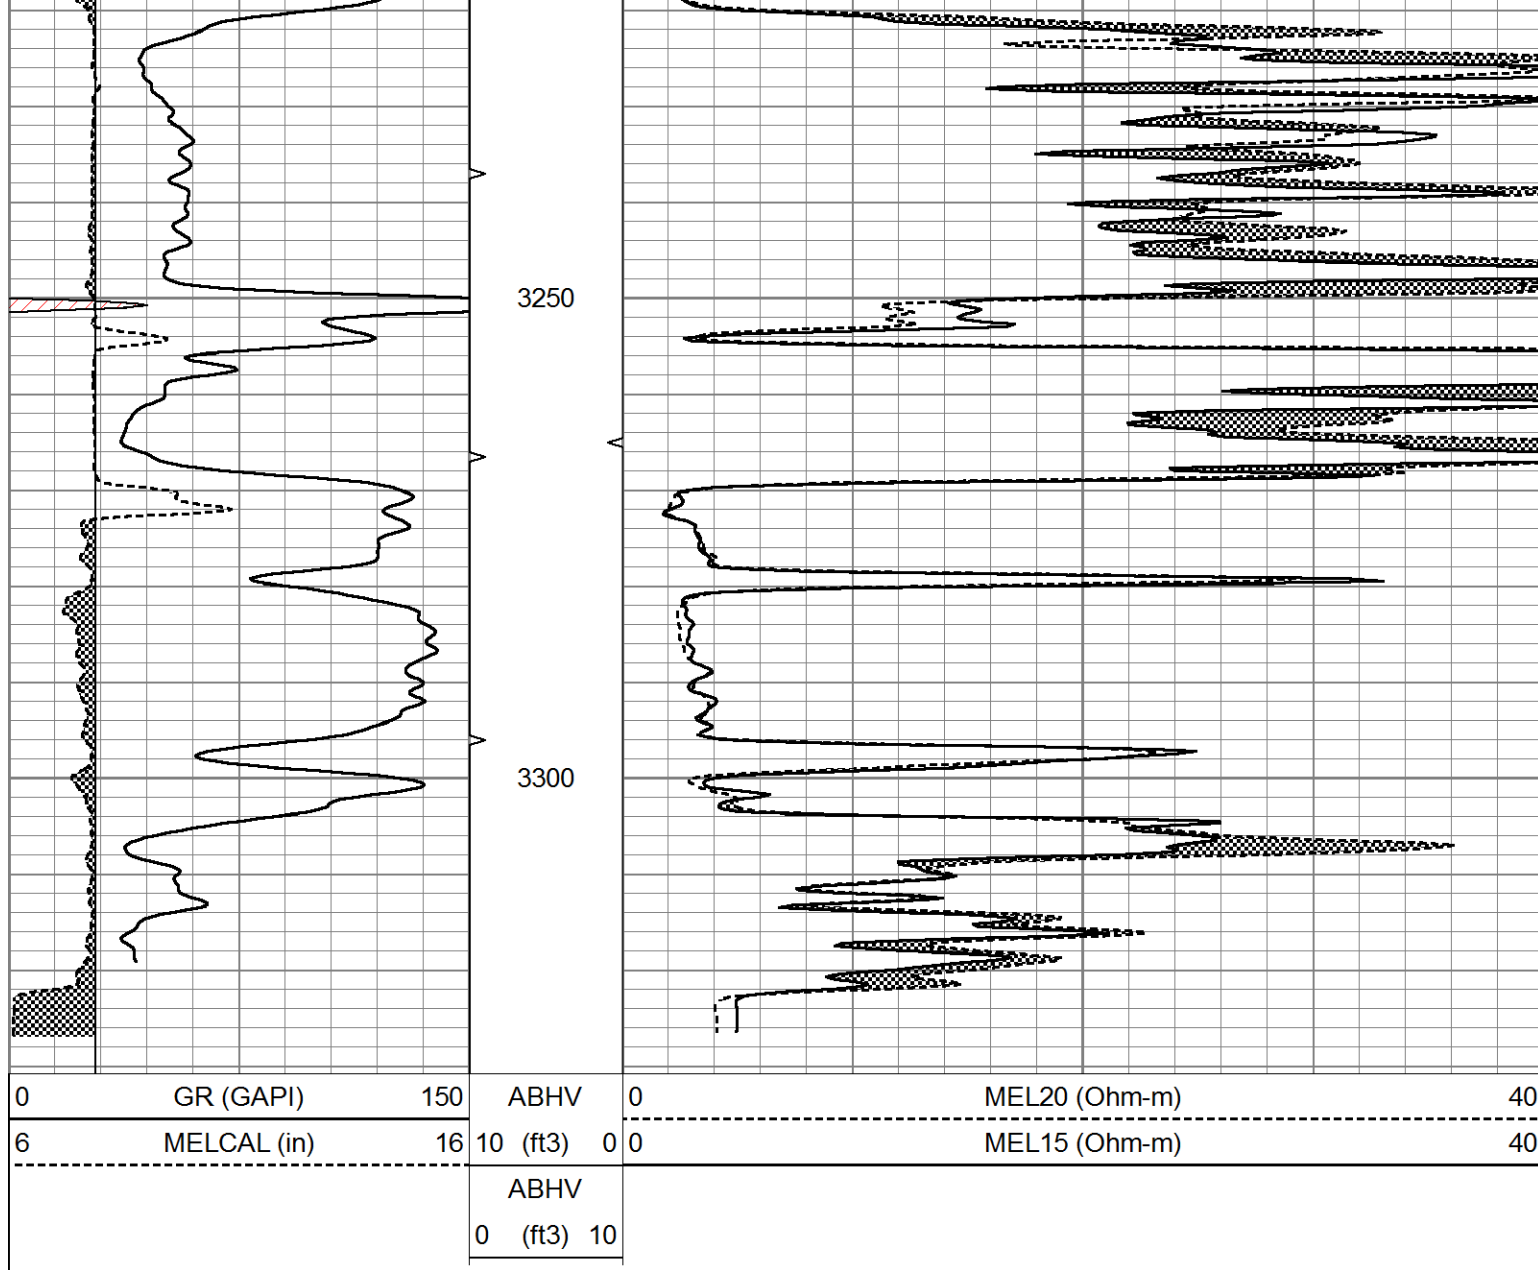

Calibration Report			
Database File	8492ddn.db		
Dataset Pathname	pass6.1		
Dataset Creation	Wed Apr 24 00:27:17 2024		
MICRO Calibration Report			
Serial Number:	070910		
Tool Model:	ProbeN		
Performed:	Wed Apr 24 00:06:34 2024		
Caliper Calibration:	Gain=3.404	Offset=2.383	
References	Low Cal	High Cal	
Readings	8.000	16.000	
	1.650	4.000	
1.5" Calibration:	Gain=62.000	Offset=0.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.000	1.216	
2" Calibration:	Gain=70.000	Offset=-0.500	

References	Low Cal	High Cal
Readings	0.000	20.000
	0.002	1.053
Gamma Ray Calibration Report		
Serial Number:	070559	
Tool Model:	OPEN_GR	
Performed:	Sun Mar 31 16:20:41 2024	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.3000	GAPI/cps