



MIDWEST SURVEYS
LOGGING - PERFORATING - CONSULTING SERVICES
P.O. Box 66, Osawatomie, KS 66064
913 / 755 - 2428

GAMMA RAY / NEUTRON / CCL

File No.	Company TDR Construction, Inc.									
	Well Moldenhauer No. 1-A									
	Field Paola - Rantoul									
	County Franklin		State		Kansas					
API # 15-059-27,536	Location				Other Services					
	4286' FSL & 3595' FEL NWSW-NE-NW				Perforate					
	Sec. 32		Twp. 15s		Rge. 21e		Elevation			
	Permanent Datum		GL		GL		Elevation		K.B. NA D.F. NA	
	Log Measured From		GL		GL		1006'		G.L. 1006'	
	Drilling Measured From				GL					
Date	05-01-2026									
Run Number	One									
Depth Driller	820.0									
Depth Logger	771.2									
Bottom Logged Interval	770.2									
Top Log Interval	20.0									
Fluid Level	Full									
Type Fluid	Water									
Density / Viscosity	NA									
Salinity - PPM Cl	NA									
Max Recorded Temp	NA									
Estimated Cement Top	0.0									
Equipment No.	Location		104		Osawatimie					
Recorded By	Steve Windisch									
Witnessed By	Lance Town									
RUN	BORE-HOLE RECORD				CASING RECORD					
No.	BIT	FROM	TO	SIZE	WG.T.	FROM	TO			
One	12.00"	0.0	20.0	8.625"	28.0	0.0	20.0			
Two	6.75"	20.0	820.0	3.50"	8.5	0.0	806.1			
				Baffle	Set	At	774.3			
<<< Fold Here >>>										


<< Fold Here >>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Drilling Contractor :
TDR Construction, Inc.

Database File: moldenhauer 1a.db
Dataset Pathname: pass1
Presentation Format: gr-n-ccl
Dataset Creation: Fri May 01 13:45:03 2026 by Log SCH 111116
Charted by: Depth in Feet scaled 1:240

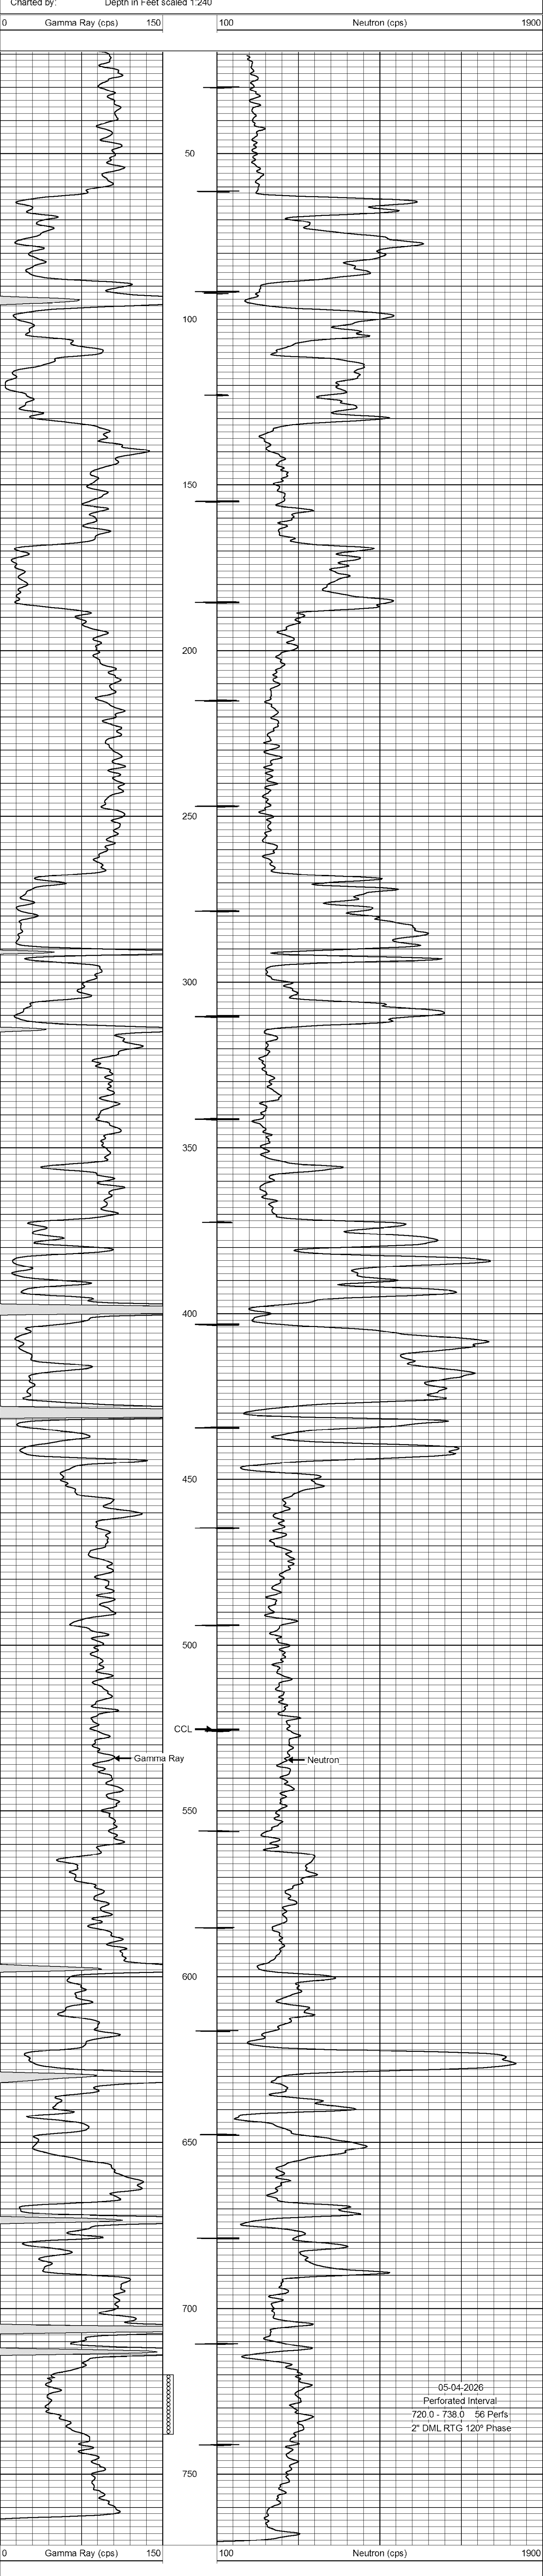

05-04-2026
Perforated Interval
720.0 - 738.0 56 Perfs
2" DML RTG 120° Phase