



MICRO LOG

Company JOHN O. FARMER, INC.				Company JOHN O. FARMER, INC.			
Well FINNEY #3				Well FINNEY #3			
Field RAINBOW RIDGE				Field RAINBOW RIDGE			
County LYON				County LYON			
State KS				State KS			
Location:		API # : 15-111-20571		Other Services			
SEC 6 TWP 17S RGE 10E		330' FNL & 2235' FWL		DIL			
				CDNL			
Permanent Datum		Ground Level		Elevation		Elevation	
Log Measured From		KB 12' AGL				K.B. 1320	
Drilling Measured From		KB				D.F. 1318	
						G.L. 1308	
Date	7/11/24						
Run Number	Two						
Depth Driller	3160						
Depth Logger	3160						
Bottom Logged Interval	3158						
Top Log Interval	2300						
Casing Driller	8 5/8" @ 260'						
Casing Logger	260'						
Bit Size	7 7/8"						
Type Fluid in Hole	Chemical Mud						
Density / Viscosity	9.3/48						
pH / Fluid Loss	10/8.7						
Source of Sample	Pit						
Rm @ Meas. Temp	1.5@70degf						
Rmf @ Meas. Temp	1.13@70degf						
Rmc @ Meas. Temp	1.8@70degf						
Source of Rmf / Rmc	Calculated						
Rm @ BHT	0.98@107degf						
Time Circulation Stopped	1:00 AM						
Time Logger on Bottom	3:30 AM						
Maximum Recorded Temperature	107degf						
Equipment Number	T-605						
Location	HAYS, KS.						
Recorded By	COLBY DREILING						
Witnessed By	AUSTIN KLAUS						

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

FROM COUNCIL GROVE, GO SOUTH ON S 5TH STREET, THEN TURN LEFT ONTO DUNLAP RD, THEN GO SOUTH UNTIL Y AVENUE, THEN EAST 3.5 MILES, SOUTH INTO.

Thank you for using Gemini Wireline
785-625-1182





MAIN PASS

Database File	joffinney#3oh.db
Dataset Pathname	pass5
Presentation Format	kml
Dataset Creation	Mon Jun 24 12:27:14 2024
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50

0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

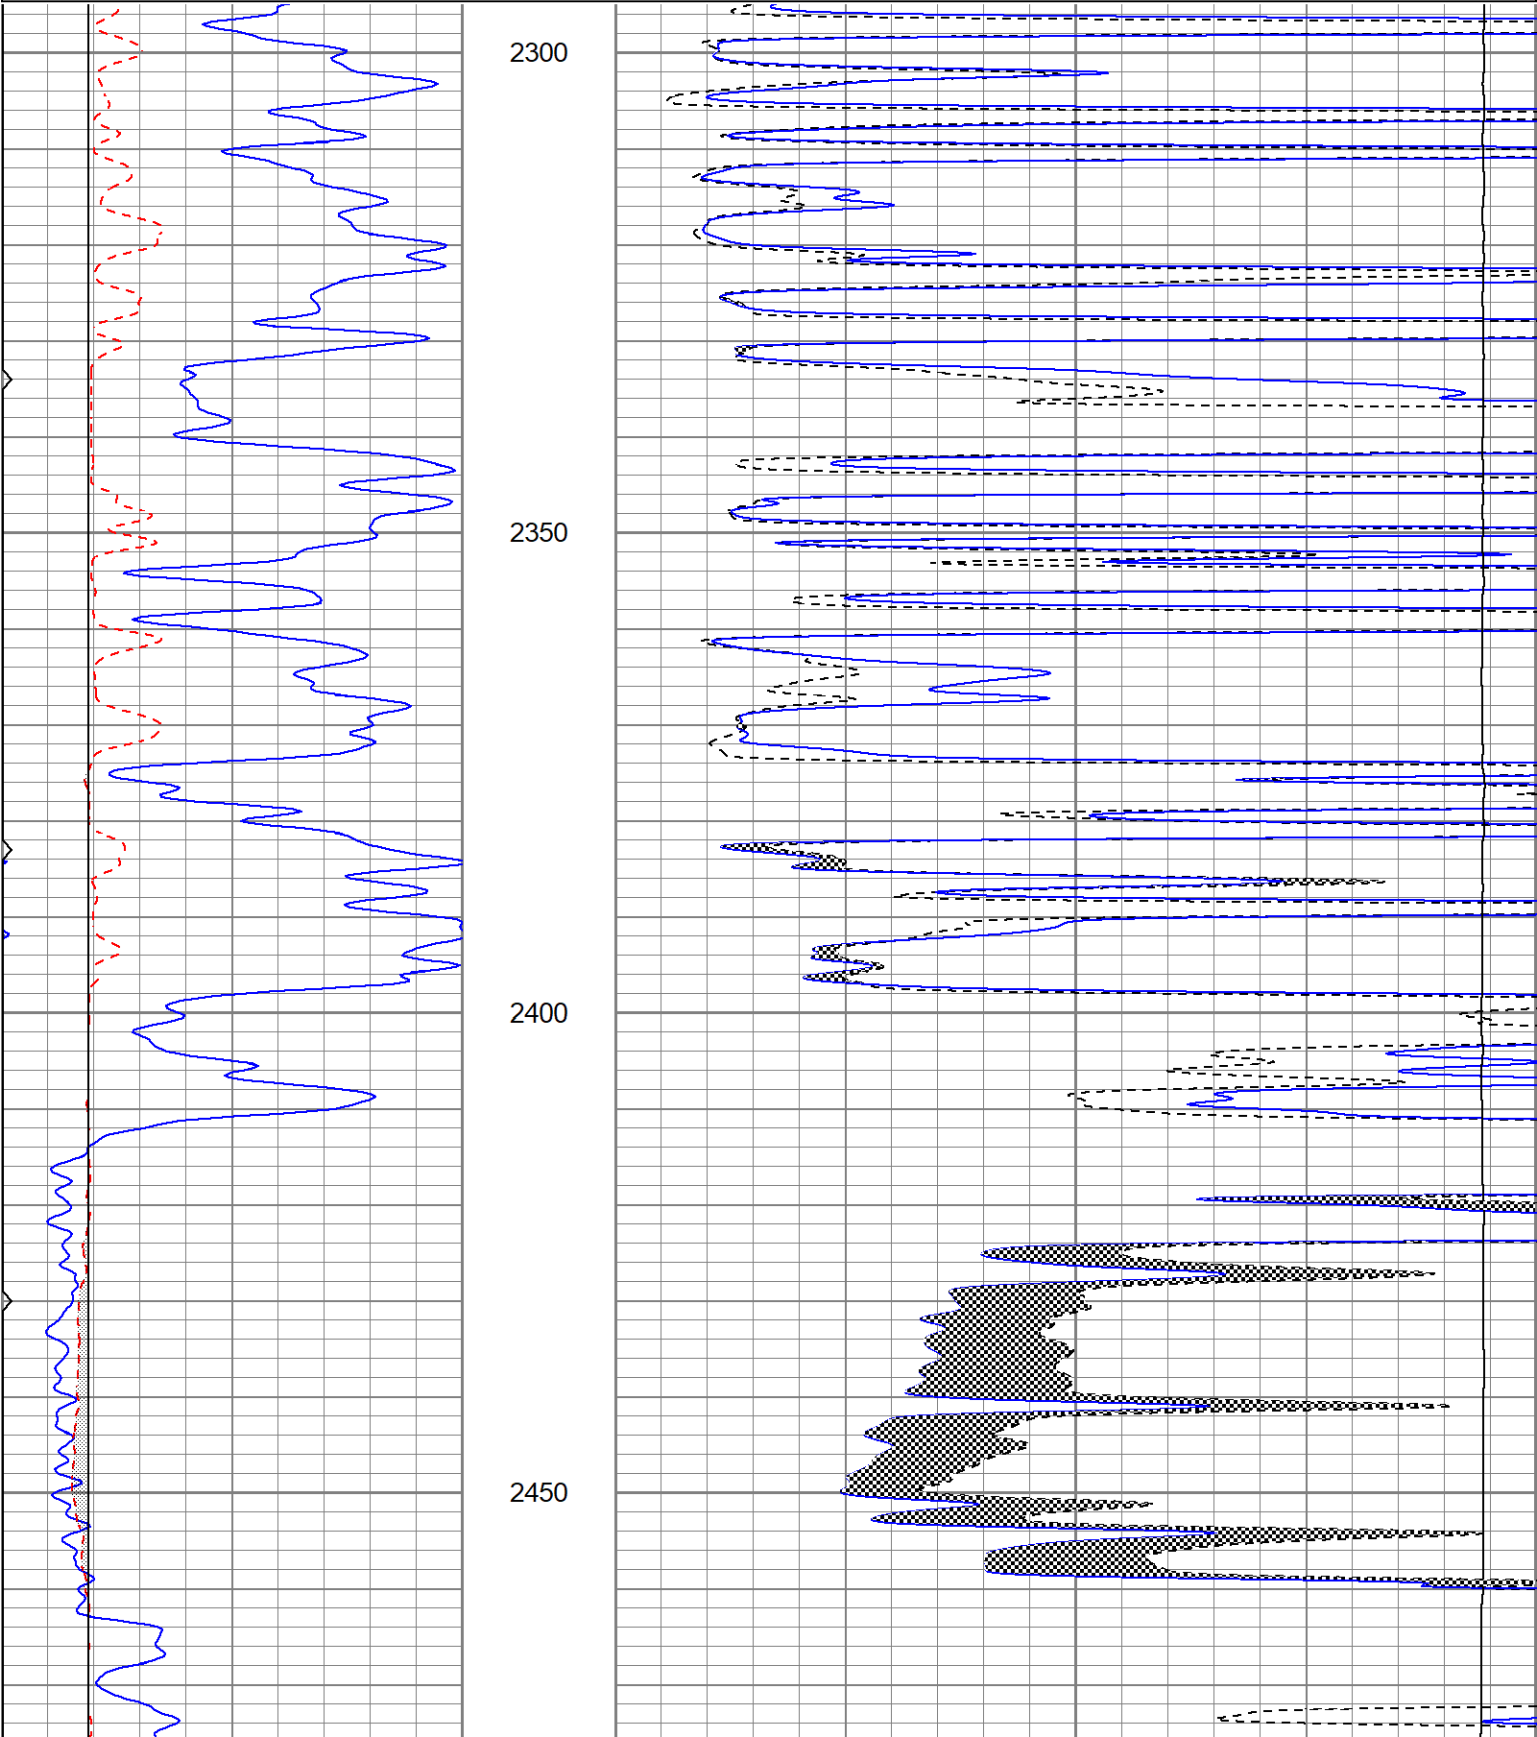

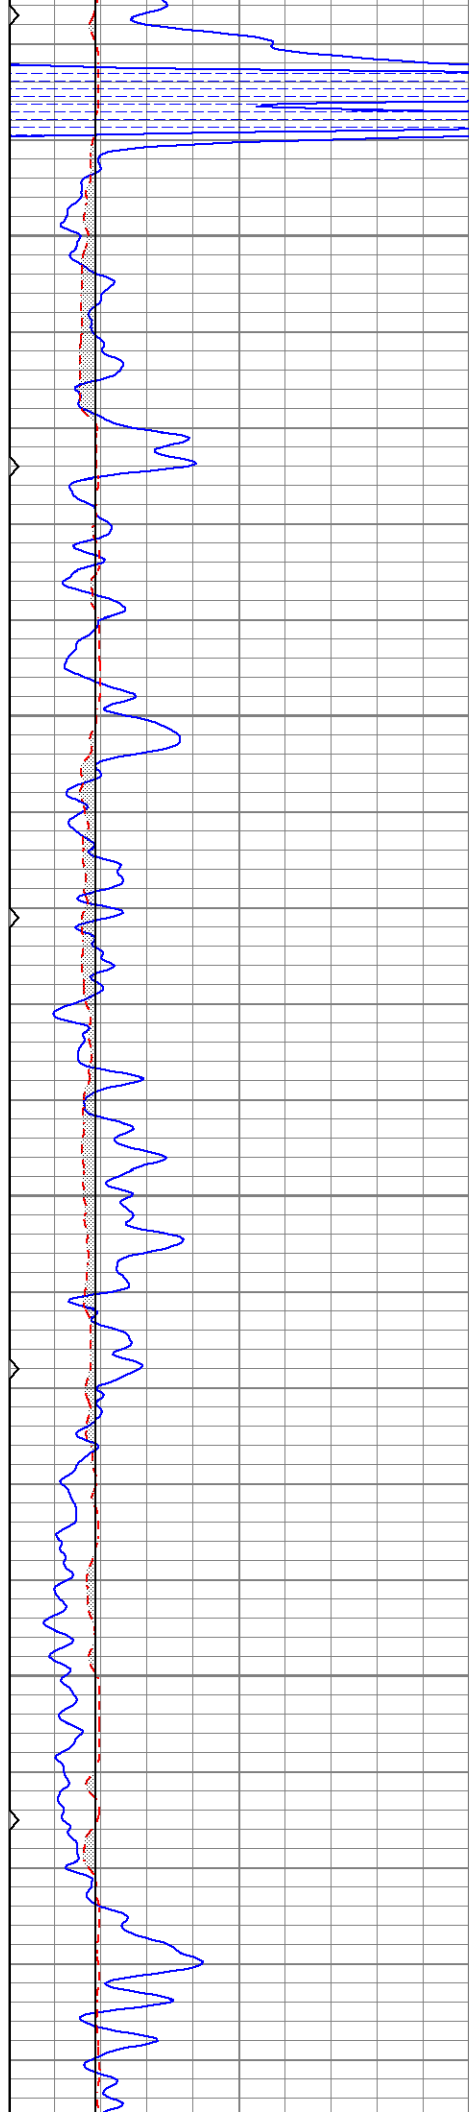



2500

2550

2600

2650

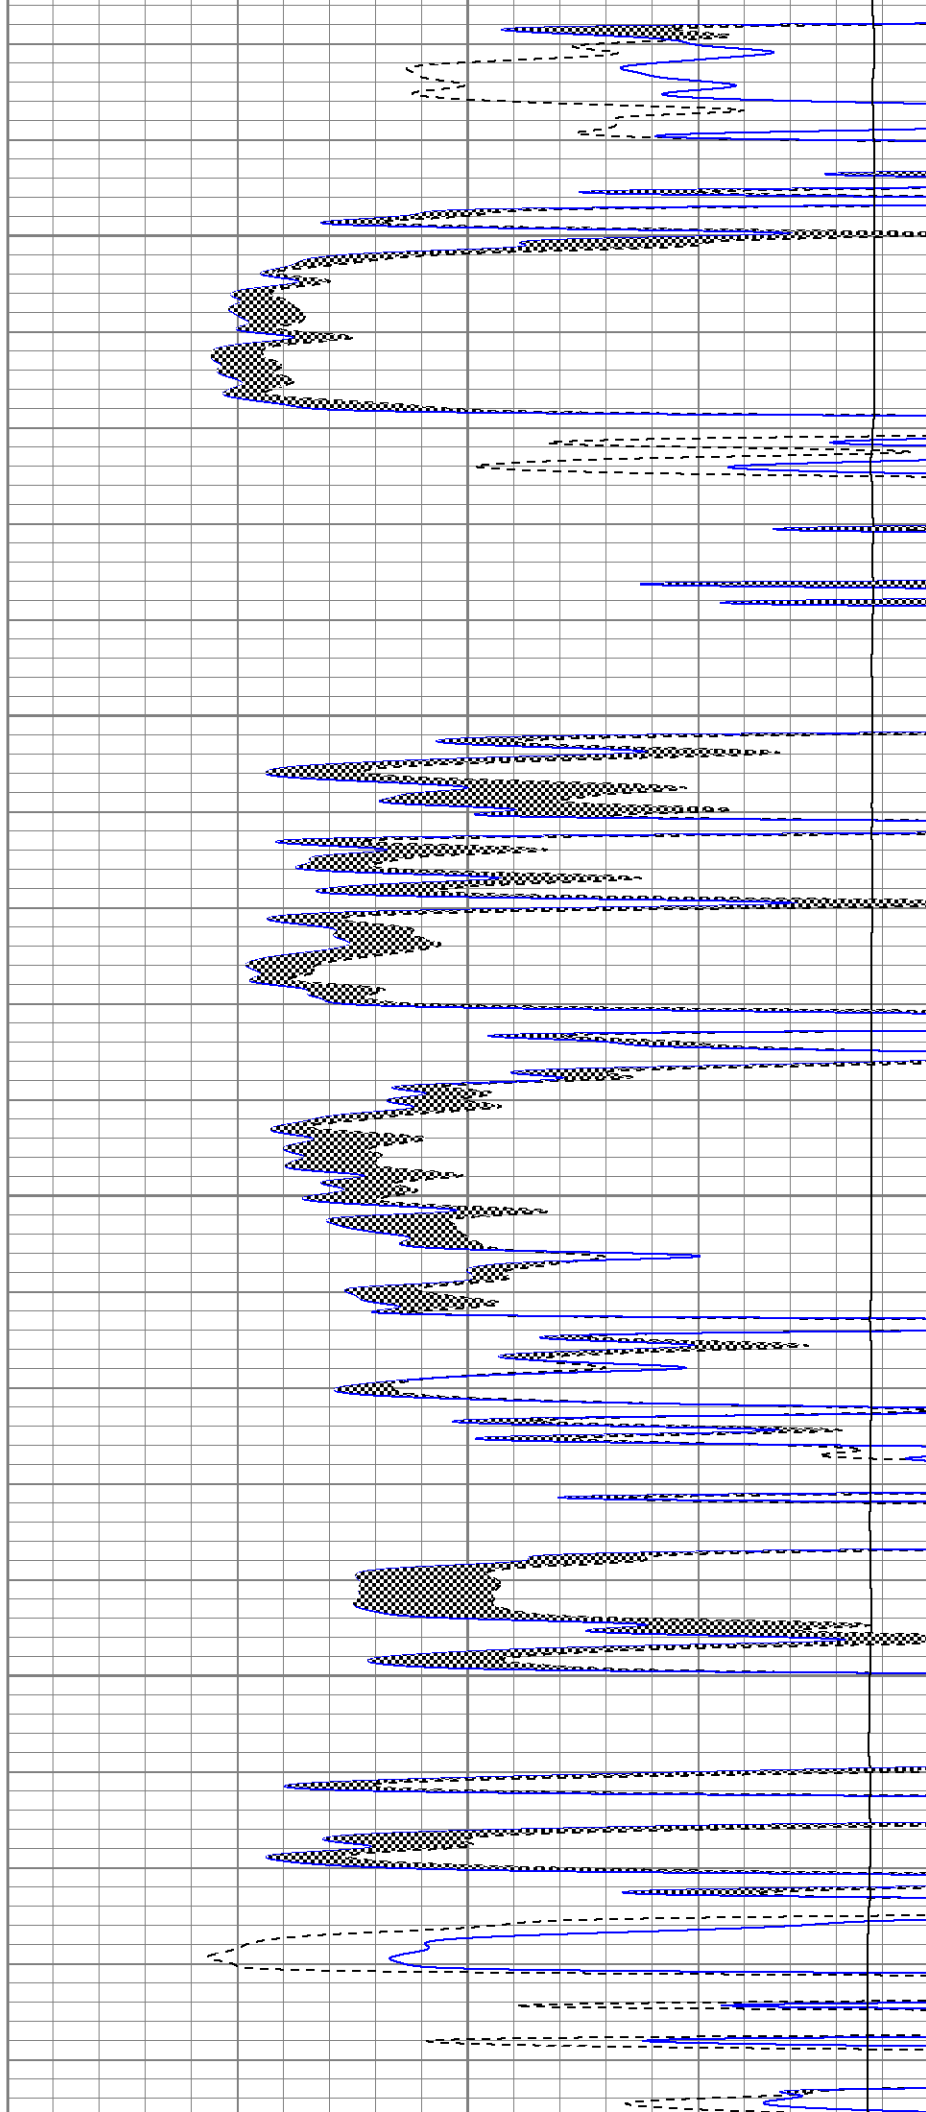

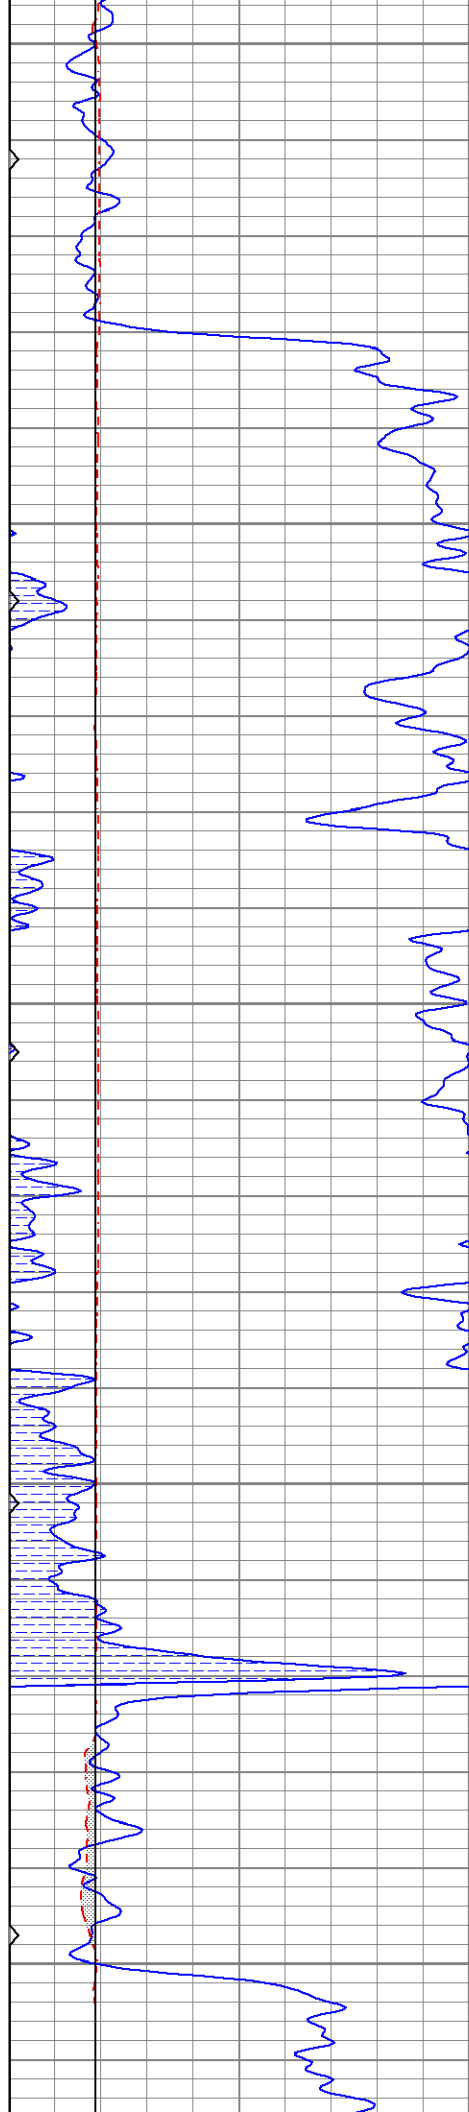


2700


2750

2800

2850

2900

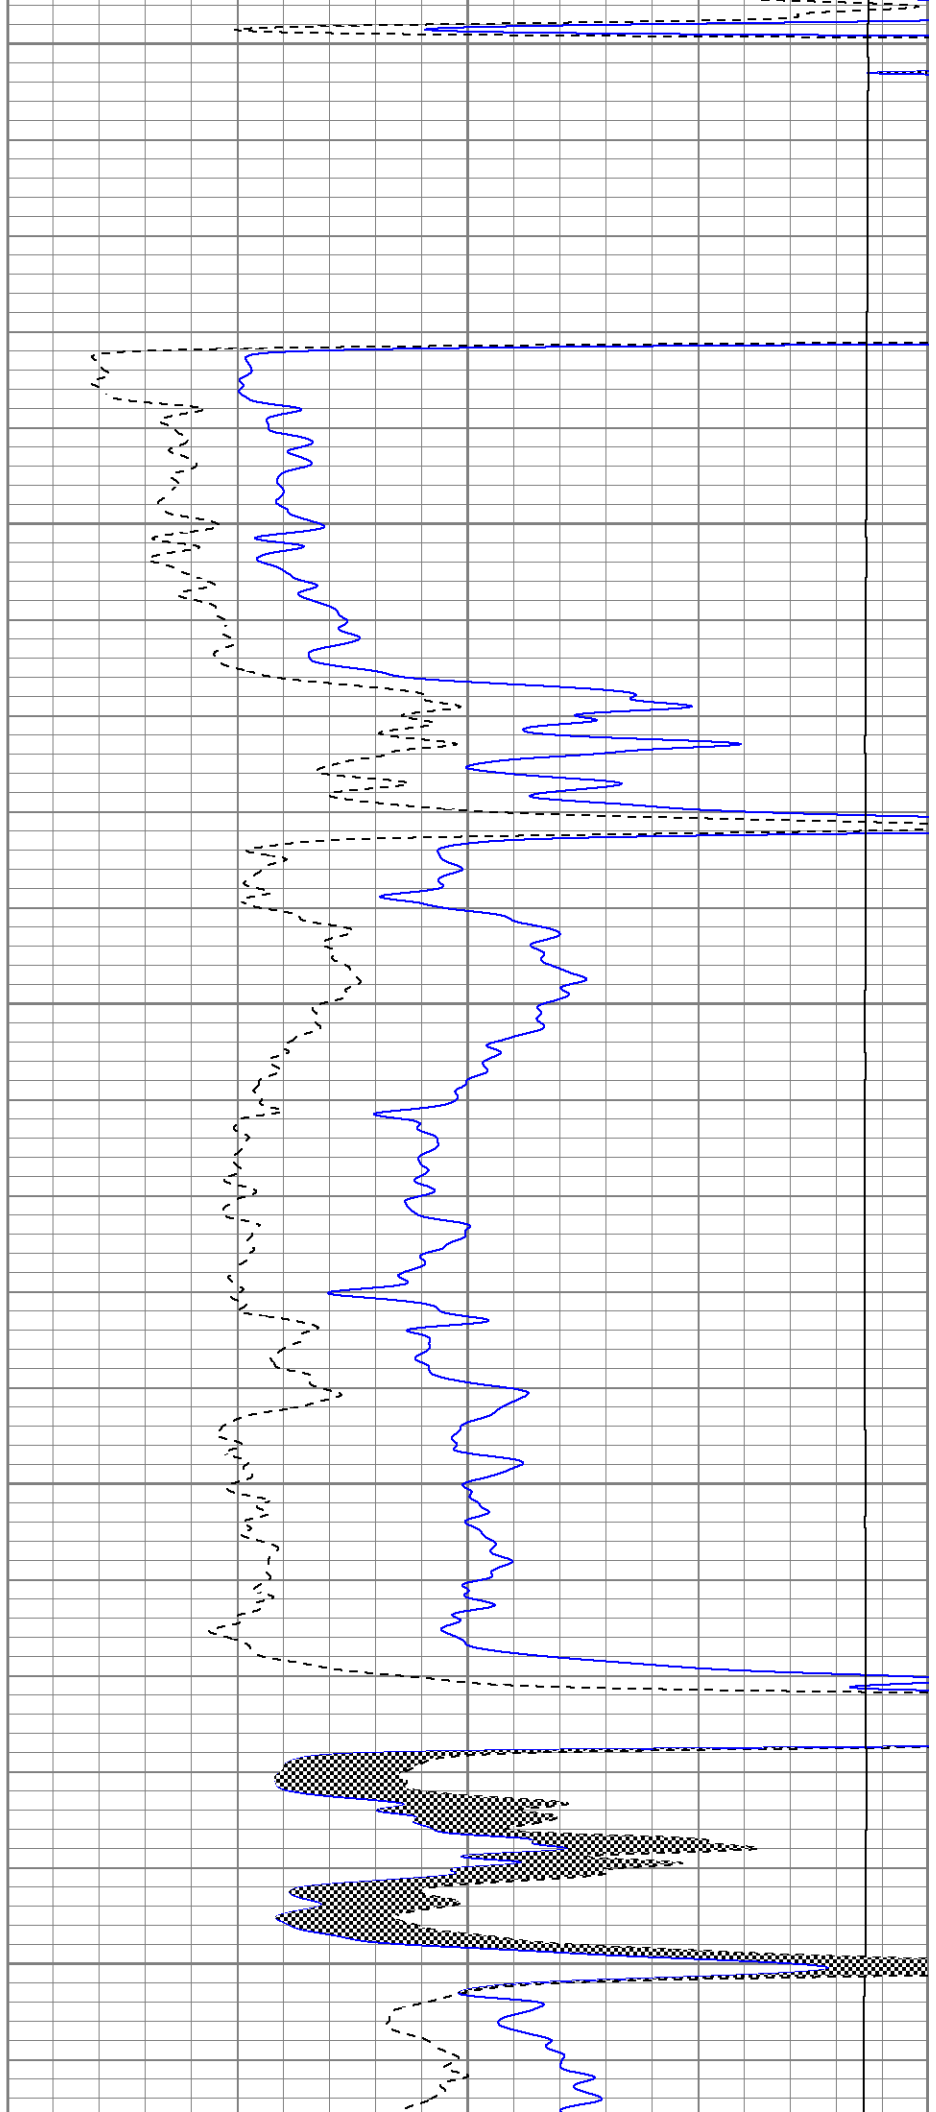

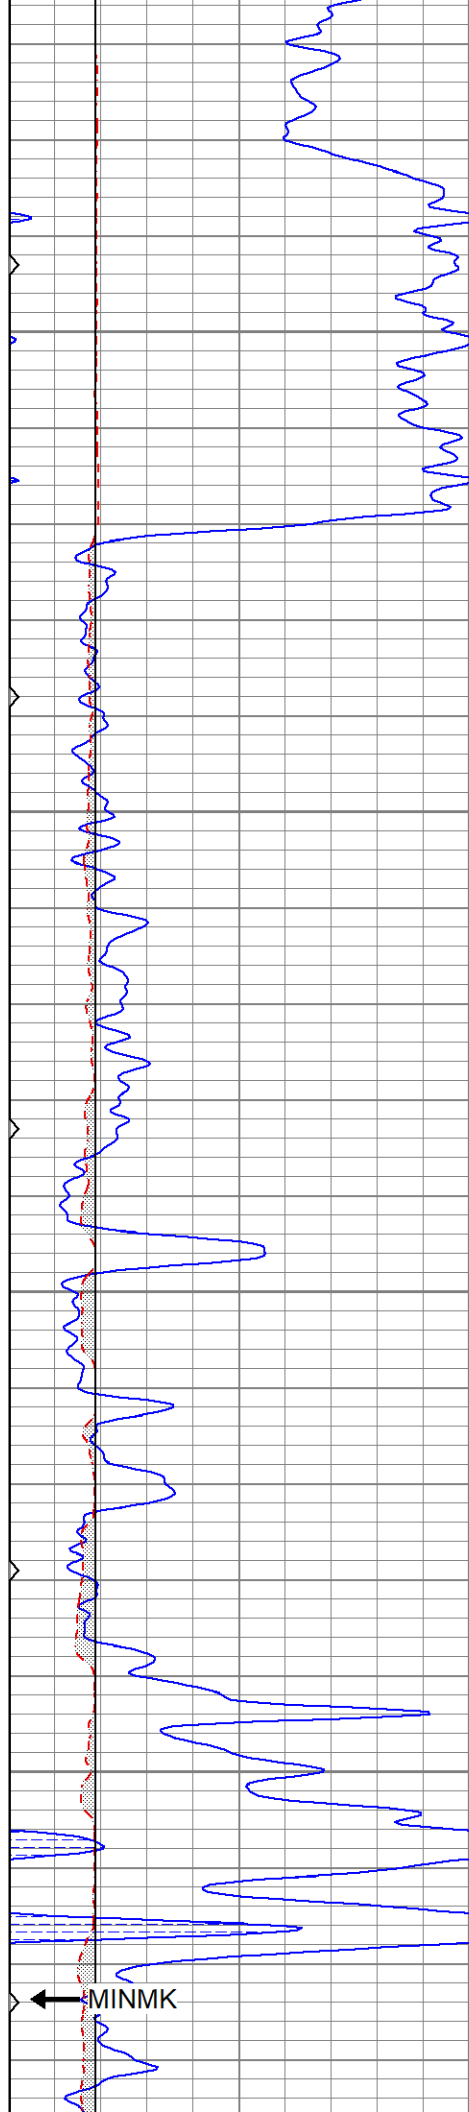


2950


3000

3050

3100


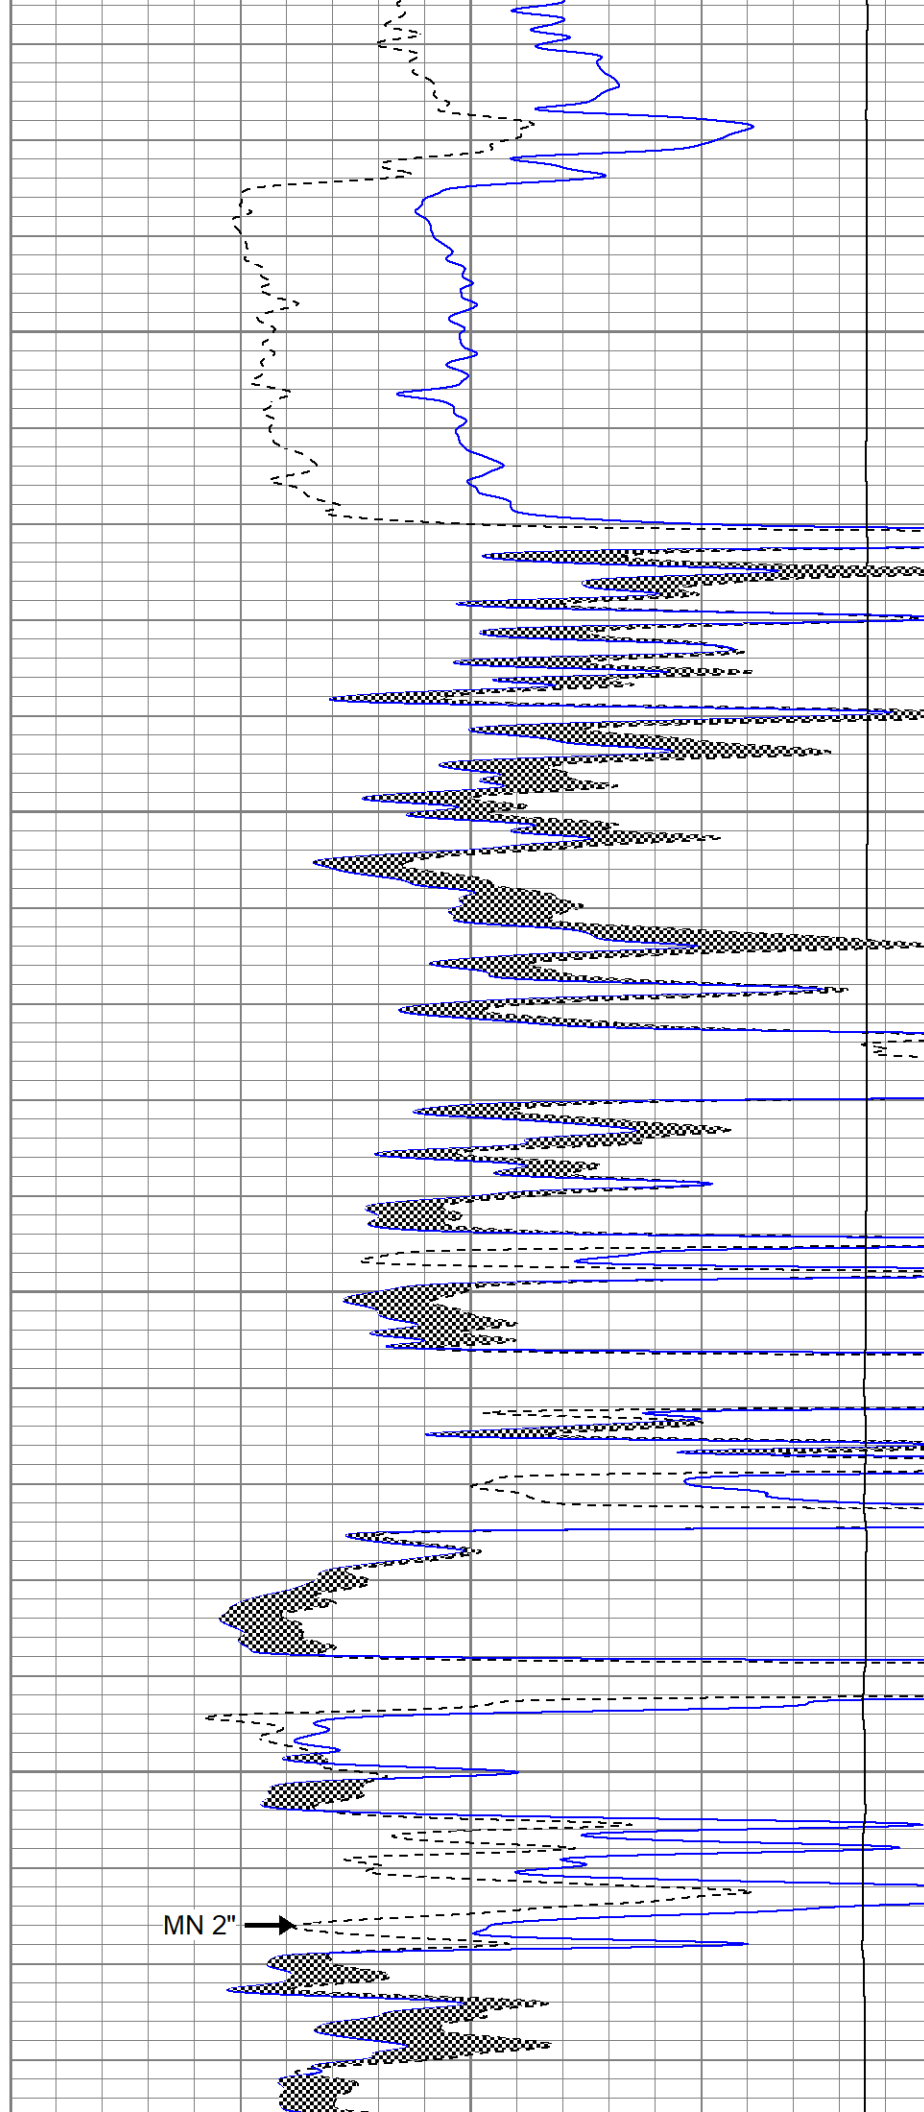



MN 2" →

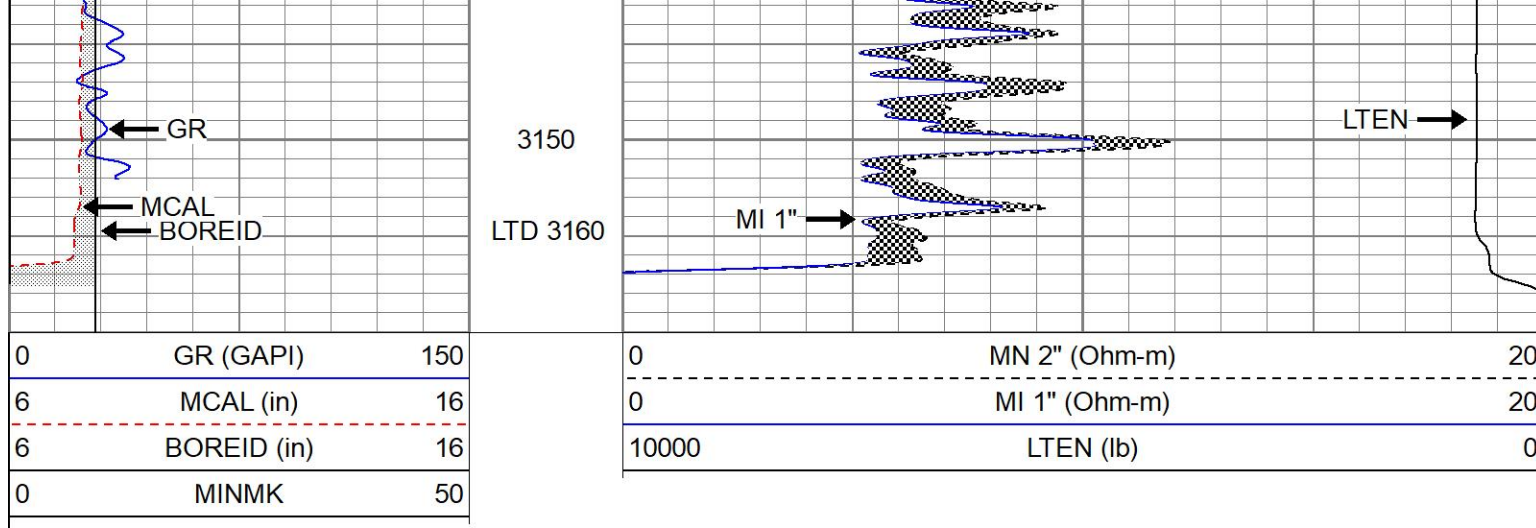

REPEAT SECTION

Database File joffinney#3oh.db
Dataset Pathname pass4
Presentation Format kml
Dataset Creation Mon Jun 24 12:17:21 2024
Charted by Depth in Feet scaled 1:240

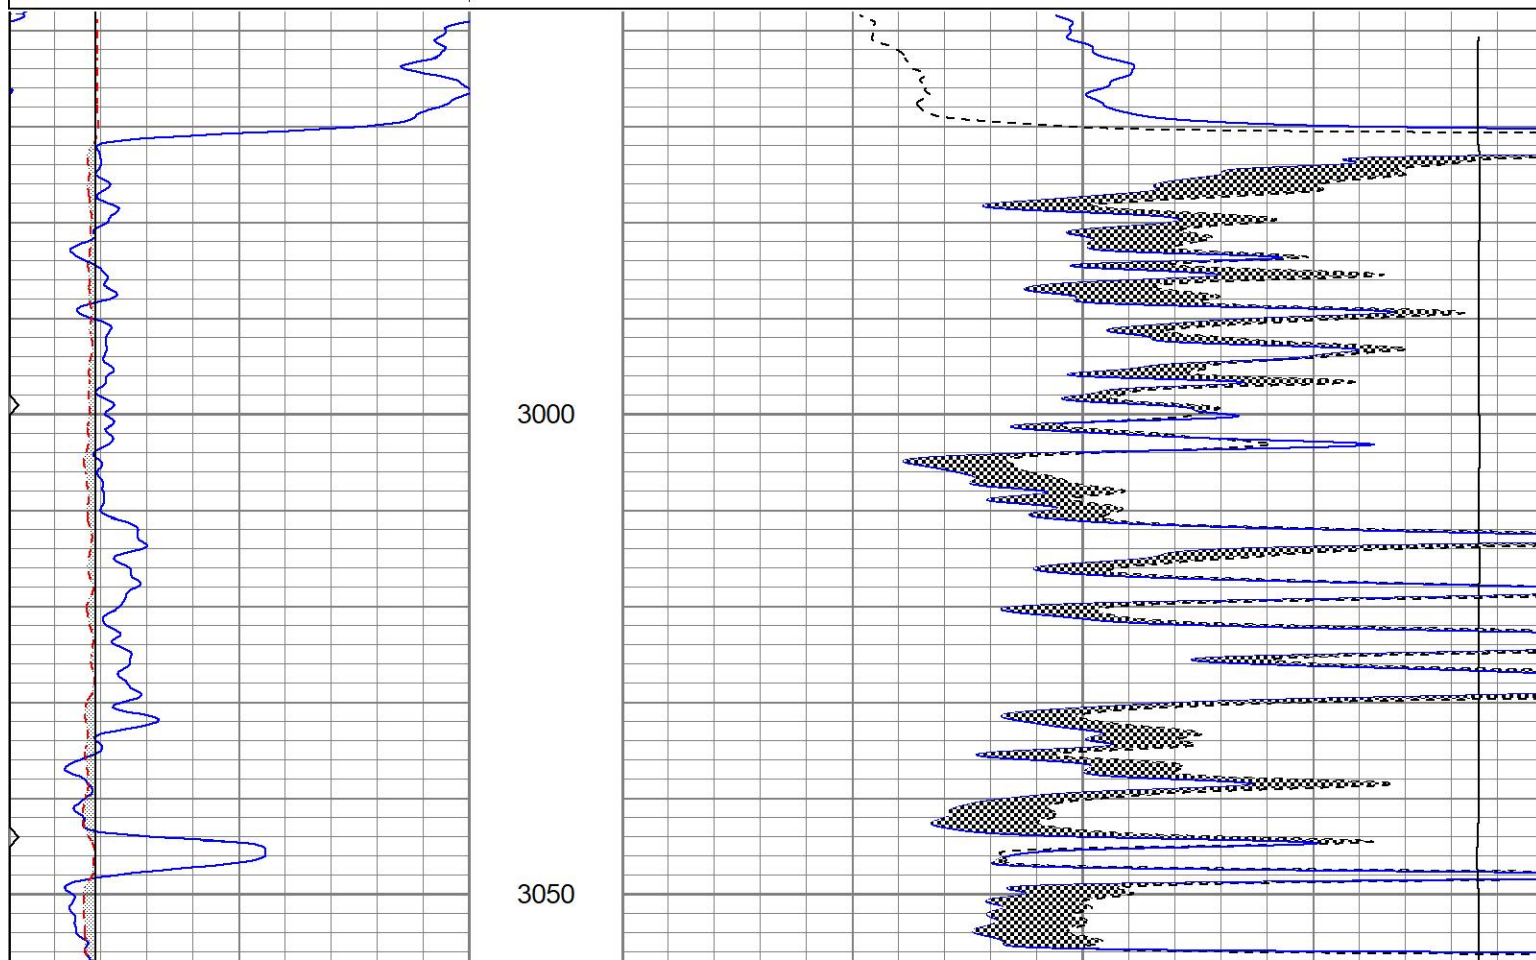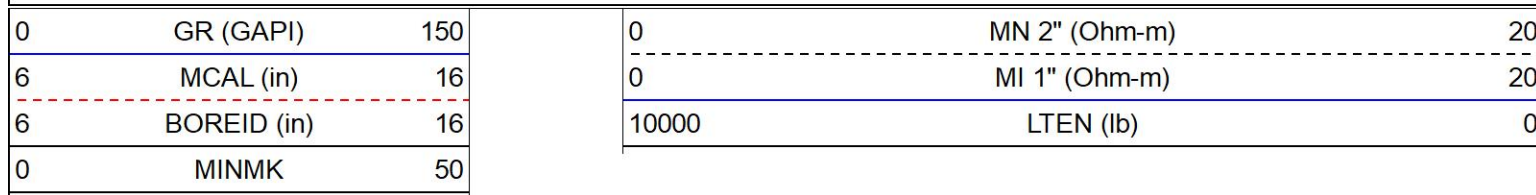

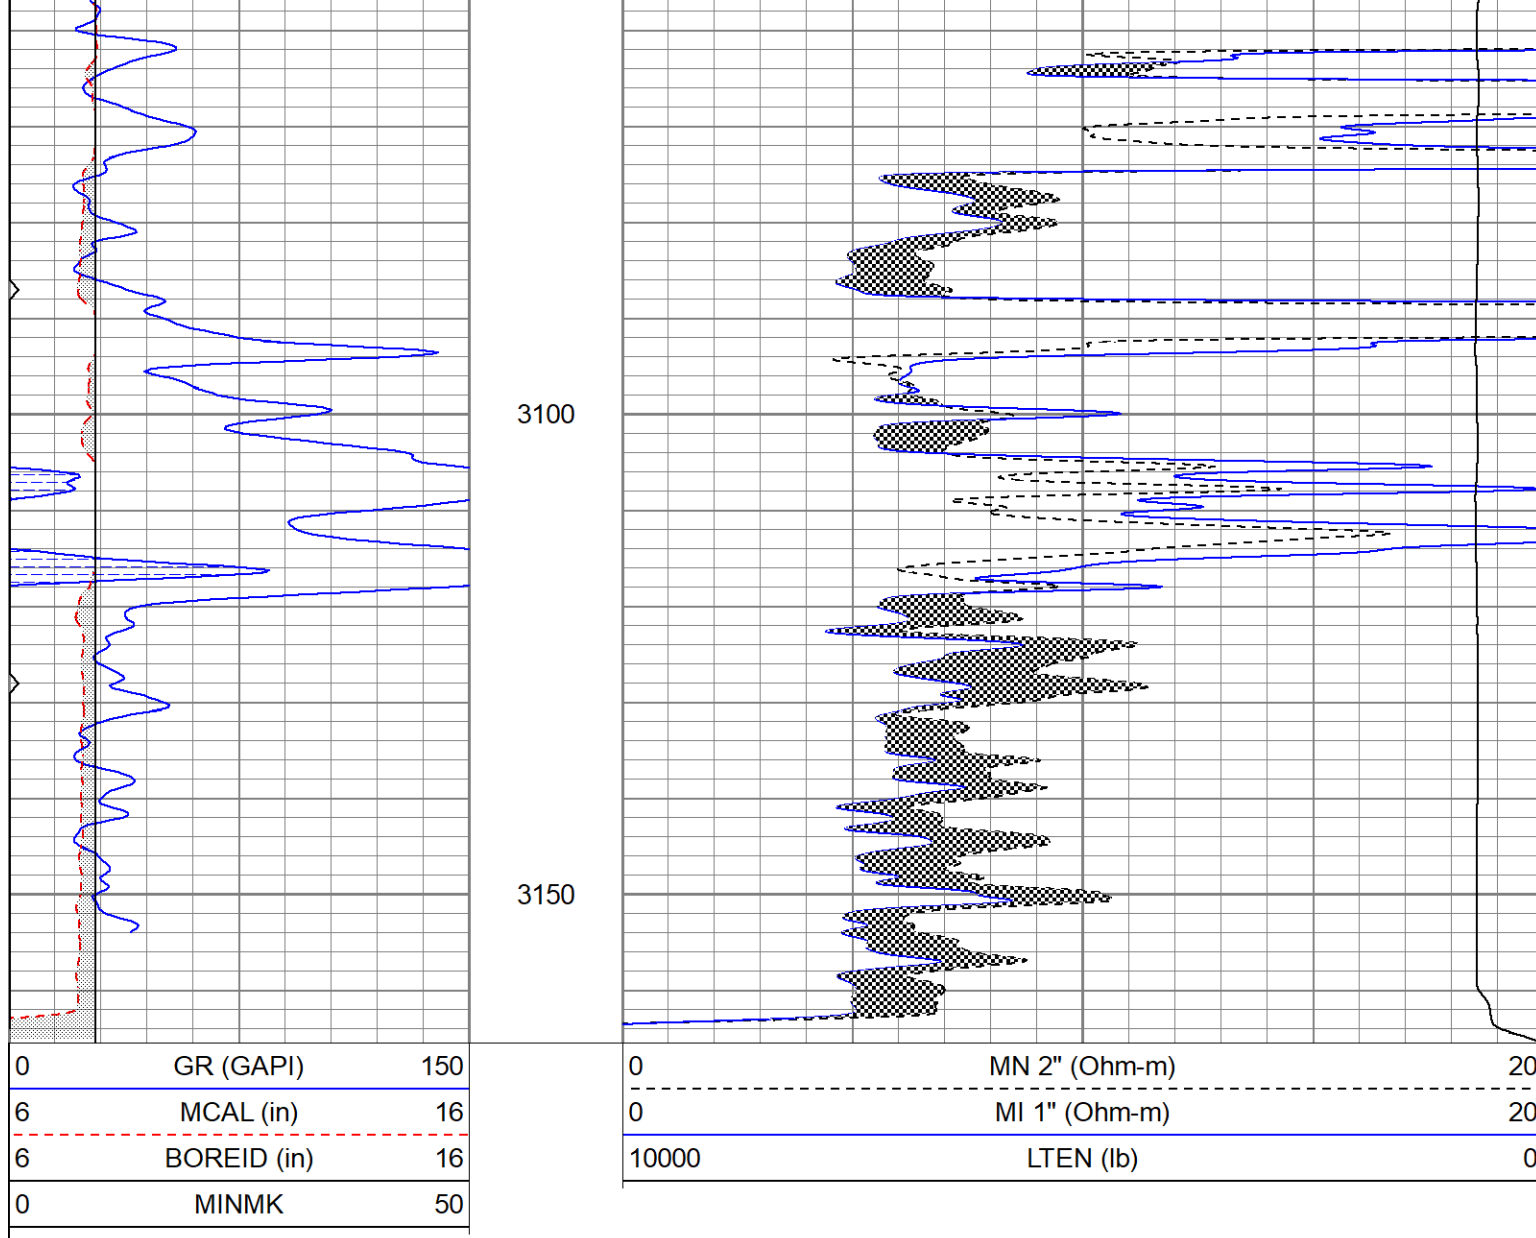

Calibration Report								
Database File	joffinney#3oh.db							
Dataset Pathname	pass5							
Dataset Creation	Mon Jun 24 12:27:14 2024							
Microlog Calibration Report								
Serial-Model:			G21-Pengo					
Performed:			Wed May 22 15:15:58 2024					
	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0197	0.1164	V	0.0000	10.0000	Ohm-m	103.4180	-2.0328
Inverse	0.0141	0.1419	V	0.0000	10.0000	Ohm-m	78.1997	-1.0990
Caliper	2.4531	4.9625	V	7.9000	13.8000	in	2.3511	2.1325
Gamma Ray Calibration Report								
Serial Number:			2001					
Tool Model:			OH					
Performed:			Sat Nov 11 18:52:32 2023					
Calibrator Value:			1.0		GAPI			

Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.8200	GAPI/cps